

MONTEREY COUNTY
RESOURCE MANAGEMENT AGENCY

DEPARTMENT OF PUBLIC WORKS

BOOK ONE

**NOTICE TO BIDDERS
AND
SPECIAL PROVISIONS**

**CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465**






COVER SHEET

BOOK ONE

NOTICE TO BIDDERS AND SPECIAL PROVISIONS


CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465

APPROVED AS TO FORM:



CYNTHIA L. HASSON
Deputy County Counsel

APPROVED AS TO INDEMNITY/
INSURANCE LANGUAGE:

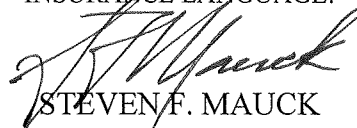


STEVEN F. MAUCK
Risk Manager 3-4-13

APPROVED AS TO FISCAL TERMS:



GARY GIBONEY 3-5-13
Chief Deputy Auditor Controller



TITLE SHEET

BOARD OF SUPERVISORS
COUNTY OF MONTEREY
STATE OF CALIFORNIA

Fernando Armenta, Chair
Dave Potter
Louis Calcagno
Simon Salinas
Jane Parker

Lew C. Bauman, P.E., Ph.D., County Administrative Officer
Benny J. Young, P.E. Resource Management Agency Director
Robert K. Murdoch, P.E. Director of Public Works
Paul H. Greenway, P.E., Assistant Director of Public Works
Jonathan L. Pascua, P.E., Senior Civil Engineer
Barney B. Guzman Project Manager

NOTICE TO BIDDERS
AND
SPECIAL PROVISIONS

**CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465**

IN

MONTEREY COUNTY

FOR USE IN CONNECTION WITH STANDARD SPECIFICATIONS 2010, THE STANDARD PLANS 2010, INCLUDING ISSUED REVISED STANDARD PLANS AND REVISED STANDARD SPECIFICATIONS THROUGH JANUARY 18, 2013; THE CURRENT LABOR SURCHARGE EQUIPMENT RENTAL RATES, OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION, BUSINESS AND TRANSPORTATION AGENCY; THE CURRENT GENERAL PREVAILING WAGE DETERMINED BY THE DIRECTOR OF INDUSTRIAL RELATIONS IS ON FILE WITH THE DEPARTMENT OF PUBLIC WORKS.

168 W. Alisal Street 2nd Floor
Salinas, CA 93901-2438
(831) 755-4800

TABLE OF CONTENTS

COVER SHEET	2
TABLE OF CONTENTS	4
SIGNATURE SHEET	6
NOTICE TO BIDDERS	8
SECTION 1 – DEFINITION AND TERMS	10
1-1.01 SPECIFICATIONS AND PLANS:	10
1-1.02 INTERPRETATION OF STANDARD SPECIFICATIONS:	10
1-1.03 DEFINITIONS:	10
1-1.04 DEFINITIONS IN SPECIAL PROVISIONS:	11
SECTION 2 - BIDDING	11
2-1.01 GENERAL:	11
2-1.02 SUBCONTRACTORS LIST:	11
2-1.03 JOB SITE AND DOCUMENT EXAMINATION:	12
2-1.04 GOOD FAITH EFFORT TO EMPLOY RESIDENTS OF MONTEREY BAY AREA:	12
SECTION 3. CONTRACT AWARD AND EXECUTION	14
3-1.01 GENERAL:	14
3-1.02 CONTRACT BONDS (PUB. CONT. CODE 10221 AND 10222):	14
SECTION 4 SCOPE OF WORK	15
4-1.01 WORK DESCRIPTION	15
4-1.02 INCREASED AND DECREASED QUANTITIES:	15
4-1.03 BALANCING CHANGE ORDER:	15
SECTION 5 – CONTROL OF WORK	15
5-1.01 AREAS FOR CONTRACTOR’S USE:	15
5-1.02 SUBCONTRACTING:	16
5-1.03 ENCROACHMENT PERMIT:	16
SECTION 6 – CONTROL OF MATERIALS	17
6-1.01 GENERAL:	17
6-1.02 RELATIVE COMPACTION:	17
6-1.03 AUTHORIZED MATERIAL LIST:	17
SECTION 7-LEGAL RELATIONS AND RESPONSIBILITY	17
7-1.01 LABOR NON DISCRIMINATION:	17
7-1.02 LABOR CODE REQUIREMENT:	18
7-1.03 GENERAL PREVAILING WAGE RATES:	18
7-1.04 PAYROLL RECORDS:	18
7-1.05 SURFACE MINING AND RECLAMATION ACT:	18
7-1.06 PUBLIC SAFETY:	18
7-1.07 INDEMNIFICATION AND INSURANCE:	19
7-1.08 WORKERS’ COMPENSATION AND EMPLOYER’S LIABILITY INSURANCE:	20
SECTION 8 - PROSECUTION AND PROGRESS	20
8-1.01 START OF JOB SITE ACTIVITIES, TIME , AND LIQUIDATED DAMAGES:	20
8-1.02 PRE-CONSTRUCTION CONFERENCE:	20
8-1.03 SCHEDULE:	20

SECTION 9 – PAYMENT	20
9-1.01 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS:	20
9-1.02 PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS:	21
9-1.03 PROGRESS PAYMENTS AND PAYMENTS AFTER CONTRACT ACCEPTANCE:	21
9-1.04 ARBITRATION:.....	21
SECTION 10 – GENERAL	24
10-1.01 WORK SEQUENCING:.....	24
SECTION 12 TEMPORARY TRAFFIC CONTROL	25
12-1.01 FLAGGING COSTS:.....	25
12-1.02 PORTABLE CHANGEABLE MESSAGE SIGN:	25
12-1.03 IMPACT ATTENUATOR VEHICLE:.....	26
12-1.04 MAINTAINING TRAFFIC:.....	28
12-1.05 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE:	29
12-1.06 TEMPORARY PAVEMENT DELINEATION:	31
SECTION 13 – WATER POLLUTION CONTROL	33
13-1.01 WATER POLLUTION CONTROL PROGRAM:.....	33
13-1.02 JOB SITE MANAGEMENT:	33
13-1.03 TEMPORARY SEDIMENT CONTROL:.....	33
SECTION 14 – ENVIRONMENTAL STEWARDSHIP	34
14-1.01 GENERAL:	34
14-1.02 NOISE AND VIBRATION:	34
14-1.03 HAZARDOUS WASTE AND CONTAMINATION:	34
14-1.04 AIR QUALITY:.....	35
SECTION 15 – EXISTING FACILITIES	35
15-1.01 COLD PLANING ASPHALT CONCRETE PAVEMENT:	35
15-1.02 OBSTRUCTION:.....	36
SECTION 19 – EARTHWORK	38
19-1.01 SHOULDER BACKING:.....	38
SECTION 39 – HOT MIX ASPHALT	38
39-1.01 HOT MIX ASPHALT (TYPE A):	38
SECTION 51 – CONCRETE STRUCTURES	38
51-1.01 MINOR CONCRETE (MINOR STRUCTURE):	38
SECTION 64 – PLASTIC PIPE	40
64-1.01 HIGH DENSITY POLYETHYLENE (HDPE) PIPE:	40
SECTION 65 – CONCRETE PIPE	40
65-1.01 REINFORCED CONCRETE PIPE (RCP):	40
SECTION 73 – CONCRETE CURB AND SIDEWALKPIPE	41
73-1.01 CURB, GUTTER, SIDEWALK, DRIVEWAY & CURB RAMP:	41
APPENDIX I - SAMPLE CONTRACT	42
SAMPLE CONTRACT	42
PAYMENT BOND.....	46
PERFORMANCE BOND.....	48



SIGNATURE SHEET


BOOK ONE


**NOTICE TO BIDDERS
AND
SPECIAL PROVISIONS**

**CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465**

The Special Provisions contained herein have been prepared by or under the direction of the following registered person.


Jonathan L. Pascua
02/22/13
Date





STANDARD PLANS LIST

The Standard Plan sheets applicable to this contract include, but are not limited to those indicated below. The Standard Plans of 2010, which apply to this contract, are included as attachments to these Special Provisions.

GENERAL ROAD WORK

MISCELLANEOUS

A10A	Acronyms and Abbreviations
A10B	Acronyms and Abbreviations
A10C	Lines and Symbols
A10D	Lines and Symbols
A10E	Lines and Symbols
A20A	Pavement Markers and Traffic Lines - Typical Details
A20B	Pavement Markers and Traffic Lines - Typical Details
A20C	Pavement Markers and Traffic Lines - Typical Details
A20D	Pavement Markers and Traffic Lines - Typical Details
A24A	Pavement Markings – Arrows
A24B	Pavement Markings – Arrows
A24C	Pavement Markings - Symbols and Numerals
A24D	Pavement Markings – Words
A24E	Pavement Markings - Words and Crosswalks
A73B	Markers
A87A	Curbs and Driveways
A88A	Curb Ramp Details
D77B	Bicycle Proof Grate Details

TEMPORARY FACILITIES

T11	Traffic Control System for Lane Closure On Multilane Conventional Highways
T12	Traffic Control System for Lane Closure On Multilane Conventional Highways
T13	Traffic Control System for Lane Closure On Two Lane Conventional Highways
T17	Traffic Control System for Moving Lane Closure On Two Lane Highways

ROADSIDE SIGNS

RS1	Roadside Signs - Typical Installation Details No. 1
RS2	Roadside Signs - Wood Post, Typical Installation Details No. 2

COUNTY OF MONTEREY
DEPARTMENT OF PUBLIC WORKS

NOTICE TO BIDDERS

Sealed bids will be received at the OFFICE OF THE COUNTY CLERK OF THE COUNTY OF MONTEREY, 168 W. ALISAL STREET 1ST FLOOR, SALINAS, CALIFORNIA 93901 (MAILING ADDRESS: P O BOX 1728, SALINAS CA 93902-1728), until 2:00 p.m., on April 11, 2013, for the

CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465

as shown on the plans, at which time they will be publicly opened and read in the Board of Supervisors' Conference Room 1032.

The work to be done consists of underground drainage construction and pavement reconstruction with hot mix asphalt concrete; including but not limited to concrete sidewalk, curb & gutter construction, pavement markings, and pedestrian ramp construction. The Engineer's Estimate for this project is \$ 196,319.

The Bidder shall possess either a valid Class A license or a combination of Class C-8, C-12, C-29, C-31, C-32 and C-34 licenses, at the time of bid opening

A bidder's bond, issued by an admitted corporate surety company in an amount equal to at least ten percent of the amount bid, must accompany the bid.

The successful bidder shall furnish a payment bond and a performance bond each in the amount of 100 percent of the Contract.

The Contract Documents are available ELECTRONICALLY and can be downloaded for free at the following Monterey County website: <http://www.co.monterey.ca.us/publicworks/bids.htm>. Plan holders must register before they can view or download the documents. A copy of the electronic files on compact-disc (CD) is also available at MONTEREY COUNTY DEPARTMENT OF PUBLIC WORKS, 168 W. ALISAL STREET, 2ND FLOOR, SALINAS, CALIFORNIA 93901 for a nonrefundable fee of \$5.00. The electronic files can be used to print the project plans, project specifications, and other such documents at various printing companies.

Pursuant to Section 5.08.120 of the Monterey County Code, all contractors and subcontractors providing work, laborers, or materialmen on the project shall make a good-faith effort to employ qualified individuals who are, and have been for at least one (1) year out of the past three (3) years prior to the opening of bids residents of the Monterey Bay Area in sufficient numbers so that no less than fifty percent (50%) of the contractor's total construction work force, on the project, including any subcontractor work force (with exception of specialty subcontractor items identified in the bid items) measured in labor work hours is comprised of Monterey Bay Area residents.

Pursuant to Section 1773 of the Labor Code, the general prevailing wage rates in the county, or counties, in which the work is to be done have been determined by the Director of the California

Department of Industrial Relations and are available at the Department of Public Works, 168 W. Alisal Street, 2nd Floor, Salinas, CA 93901, and available from the California Department of Industrial Relations' Internet web site at <http://www.dir.ca.gov/DLSR/PWD>.

Pursuant to Public Contract Code section 22300, the Contractor may substitute securities for any moneys withheld by the County to ensure performance under the contract.

The County reserves the right to reject any or all bids or to waive any irregularities or informalities in any bids or in the bidding.

Date: March 19, 2013

ROBERT K. MURDOCH, P.E.
DIRECTOR OF PUBLIC WORKS
COUNTY OF MONTEREY

RESOURCE MANAGEMENT AGENCY
DEPARTMENT OF PUBLIC WORKS
COUNTY OF MONTEREY
STATE OF CALIFORNIA

SPECIAL PROVISIONS

**CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465**

SECTION 1 – DEFINITION AND TERMS

1-1.01 SPECIFICATIONS AND PLANS:

The work embraced herein shall be done in accordance with the Standard Specifications and Standard Plans, of 2010, of the State of California, Department of Transportation, as revised, insofar as the same may apply and in accordance with the following Special Provisions:

In case of conflict between the Standard Specifications and these Special Provisions, the Special Provisions shall take precedence over and be used in lieu of such conflicting portions. The listing of certain salient sections from the Standard Specifications and these Special Provisions shall not in any way relieve the Contractor of complying with each and every section of the Standard Specifications.

Revisions to the Standard Specifications set forth in these special provisions shall be considered as part of the Standard Specifications for the purposes set forth in Section 5-1.02 "Contract Components" of the Standard Specifications. Whenever either the term "Standard Specifications is revised" or the term "Standard Specifications are revised" is used in the special provisions, the indented text or table following the term shall be considered Revised Standard Specifications. In case of conflict between such revisions and the Standard Specifications, the revision shall take precedence over and be used in lieu of the conflicting portions.

1-1.02 INTERPRETATION OF STANDARD SPECIFICATIONS:

For the purpose of this Contract, certain terms or pronouns in place of them used throughout the Standard Specifications, shall be interpreted as follows: Attention is directed to Section 1, "Definition and Terms," of the Standard Specifications and these Special Provisions:

1-1.03 DEFINITIONS:

The following terms defined in Section 1-1.07, "Definitions," of the Standard Specifications shall be interpreted to have the following meaning and intent, unless otherwise stated in these provisions:

State:	County of Monterey
Department:	The Monterey County Department of Public Works
Director:	Chair of the Board of Supervisors
Engineer:	Director of Public Works of Monterey County, acting either directly

or through properly authorized agents, such agents acting within the scope of the particular duties entrusted to them.

1-1.04 DEFINITIONS IN SPECIAL PROVISIONS:

Whenever in the Special Provisions and other contract documents, the following terms, or pronouns in place of them are used, the intent and meaning shall be interpreted as follows:

Clerk of the Board:	The Clerk of the Monterey County Board of Supervisors
Director of Public Works:	The Director of Public Works of Monterey County.
Attorney General:	County Counsel of Monterey County
Laboratory:	Any established laboratory designated by the Engineer to test materials and work involved in the Contract.

SECTION 2 - BIDDING

2-1.01 GENERAL:

The bidder's attention is directed to the provisions in Section 2, "Bidding," of the Standard Specifications and these Special Provisions for the requirements and conditions which he must observe in the preparation and the submission of the bid.

The Bidder's Bond form mentioned in the last paragraph in Section 2-1.34, "Bidder's Security," of the Standard Specifications will be found in the Bid Form, Book Two. Bidder's security in the form of cashier's check or certified check shall be made payable to the County of Monterey.

In conformance with Public Contract Code Section 7106, a Noncollusion Declaration is included in the Bid Form, Book Two. Signing the Bid shall also constitute signature of the Noncollusion Declaration.

This Contract will require a Class "A" contractor's license or a combination of Class C-8, C-12, C-29, C-31, C-32 and C-34.

2-1.02 SUBCONTRACTORS LIST:

Each bid shall have listed therein the name and address of each Subcontractor to whom the bidder proposes to subcontract portions of the work in an amount in excess of one-half of one percent of his total bid or \$10,000, whichever is greater, in accordance with the Subletting and Subcontracting Fair Practices Act, commencing with Section 4100 of the Public Contract Code.

The bidder's attention is directed to other provisions of said Act related to the imposition of penalties for a failure to observe its provisions by using unauthorized Subcontractors or by making unauthorized substitutions.

A sheet for listing the Subcontractors, as required herein by law, is included in the Bid.

2-1.03 JOB SITE AND DOCUMENT EXAMINATION:

The bidder shall examine carefully the site of the work contemplated, the specifications, and the proposal and contract forms therefor. The submission of a bid shall be conclusive evidence that the bidder has investigated and is satisfied as to the general and local conditions to be encountered, as to the character, quality and scope of work to be performed, the quantities of materials to be furnished and as to the requirements of the proposal, plans, specifications and the contract.

The submission of a bid shall also be conclusive evidence that the bidder is satisfied as to the character, quality and quantity of surface and subsurface materials or obstacles to be encountered insofar as this information was reasonably ascertainable from an inspection of the site as well as from the specifications made a part of the contract.

All bidder inquiries about the meaning or intent of the Contract Documents submitted to the Engineer shall be in writing. Replies to the inquiries will be in the form of addenda and will be mailed, faxed, or delivered to all parties recorded by the Engineer as having received the bidding documents. Issued addenda shall be considered as part of the Contract Documents. Bidder inquiries received less than ten (10) days prior to the date of bid opening will not be answered. Oral and other interpretations or clarifications will be without legal effect.

The County assumes no responsibility for conclusions or interpretations made by a bidder or contractor based on the information or data made available by the County. The County does not assume responsibility for representation made by its officers or agents before the execution of the contract concerning surface or subsurface conditions, unless that representation is expressly stated in the contract.

No conclusions or interpretations made by a bidder or contractor from the information and data made available by the County will relieve a bidder or contractor from properly fulfilling the terms of the contract.

2-1.04 GOOD FAITH EFFORT TO EMPLOY RESIDENTS OF MONTEREY BAY AREA:

In accordance with Section 5.08.120 of the Monterey County Code, all contractors and subcontractors providing work, laborers, or materialmen on the project shall make a good-faith effort to employ qualified individuals who are, and have been for at least one (1) year out of the past three (3) years prior to the opening of bids residents of the Monterey Bay Area in sufficient numbers so that no less than fifty percent (50%) of the contractor's total construction work force, on the project, including any subcontractor work force (with exception of specialty subcontractor items identified in the bid items) measured in labor work hours is comprised of Monterey Bay Area residents. A certification form relating to compliance with Section 5.08.120 is furnished with the bid documents. You must complete the certification form and submit the certification form with the sealed bid. The Monterey County Board of Supervisors may deem your bid non-responsive for failure to abide by the good-faith local hiring provisions of Section 5.08.120.

If any contractor submitting a bid for a contract for public works of improvement fails to abide by the good-faith local employment provisions of this Section, the contractor may be declared by the Board to be a non-responsive bidder for purposes of this Chapter. If a contractor lists in his or her bid a subcontractor who is currently disqualified under the terms of this Section, the Board may declare said contractor to be a non-responsive bidder for purposes of this Chapter. If the

Board finds that a contractor to whom a contract for public works of improvement has been awarded has failed to comply with the good-faith employment provisions of this Section during the performance of the contract, the Board may disqualify the contractor from bidding on any County contract for public works of improvement for a period of one (1) year from the date of the Board's disqualification. A subsequent violation of this Section by a contractor may result in disqualification by the Board for a period of three (3) years from the date of the subsequent disqualification.

"Resident of Monterey Bay Area" means a person who resides within the boundaries of Monterey County, Santa Cruz County, or San Benito County.

A "good-faith effort" means the contractor will take the following or similar actions to recruit and maintain Monterey Bay Area residents as part of the construction workforce:

- Contact local recruitment sources, including local hiring halls, to identify qualified individuals who are Monterey Bay Area residents;
- Advertise for qualified Monterey Bay Area residents in trade papers, electronic/"on-line" sources, and a newspapers of general circulation in the Monterey Bay Area, unless time limits imposed by the County do not permit such advertising.
- If portions of the work are to be performed by subcontractors, identify qualified subcontractors whose work force includes Monterey Bay Area residents; and
- If current workforce does not exceed the fifty (50) percent local requirement, develop a written plan to recruit Monterey Bay Area residents as part of the construction workforce.

The Contractor shall keep an accurate record on a standardized form showing the name, place of residence, trade classifications, hours worked, proof of journeyman or apprenticeship status, per diem wages and benefits of each person employed by the contractor, the contractor's subcontractors, on the project, including full-time, part-time, permanent and temporary employees, make sure records are available to the County with submission of final certified payroll records prior to final payment.

The Contractor shall keep, and provide to the County, on forms acceptable to the County, an accurate record documenting compliance with this provision. Said records shall include; a listing by name and business address of all local recruitment sources contacted by the contractor, the date of the local recruitment contact and the identity of the person contacted, the trade and classification and number of hire referrals requested, the number of local hires made as a result of the contract, and the identity of business address of the person(s) hired pursuant to the contact.

At the conclusion of the project and at other intervals as may be deemed appropriate by the Engineer, the contractor shall provide a summary report of the percentage of actual labor work hours performed by Monterey Bay Area residents on the project.

Contractors and subcontractors are referred to the provisions of Section 5.08.120 of the Monterey County Code and the rules, regulations, and procedures adopted to implement Section 5.08.120, which are online at <http://library.municode.com/index.aspx?clientId=16111>.

SECTION 3. CONTRACT AWARD AND EXECUTION

3-1.01 GENERAL:

The bidder's attention is directed to the provisions in Section 3, "Contract Award and Execution," of the Standard Specifications and these special provisions for the requirements and conditions concerning award and execution of contract.

In lieu of Section 3-1.04, "Contract Award," of the Standard Specification, insert the following:

Bidders who wish to lodge a protest as to the award of the bid must do so before 5 p.m. of the 5th business day following the notice of intent to award the contract. Failure to timely file a written protest shall constitute a waiver of right to protest. Untimely protests will not be accepted or considered. Bid protests must be submitted, in writing, to: MONTEREY COUNTY DEPARTMENT OF PUBLIC WORKS TO THE ATTENTION OF THE PROJECT MANAGER/168 W ALISAL STREET FL2/SALINAS CA 93901-2438. Protests may be hand-delivered or sent via facsimile [(831)755-4958], certified postal mail, or E-mail to the attention of the project manager [The Project Manager's E-mail address may be obtained by calling (831) 755-4800]. Bid protests must include the project name and project number, a complete statement describing the basis for the bid protest, including a detailed statement of all legal and factual grounds for the protest, any documentation supporting the protestor's grounds for the protest, and the form of relief requested and the legal basis for such relief. The party lodging the protest must also include their contact information including mailing address, telephone number, and E-mail address.

If a valid protest is timely filed, the Department shall investigate the bid protest. The protested bidder shall have three (3) business days to respond to any Department of Public Works requests to provide additional information. The Department shall respond to the protesting party, stating its finding. The Department Director shall make a recommendation to the Board regarding the bid protest.

The award of the contract, if it be awarded, will be to the lowest responsible bidder within ninety (90) days after bid opening, whose bid complies with all the requirements prescribed.

In determining the lowest "responsible" Bidder, consideration shall be given to the general competency of Bidder in regards to the work covered by the bid.

The contract shall be executed by the successful bidder and shall be returned, together with the contract bonds and insurance certificates, to the MONTEREY COUNTY PUBLIC WORKS DEPARTMENT so that it is received within 10 days, not including Saturdays, Sundays and legal holidays, after the bidder has received the contract for execution. Failure to do so shall be just cause for forfeiture of the bid guaranty. The executed contract documents shall be delivered to the following address: MONTEREY COUNTY DEPARTMENT OF PUBLIC WORKS, 168 W. ALISAL ST, 2ND FL, SALINAS, CA, 93901-2438.

3-1.02 CONTRACT BONDS (PUB. CONT. CODE 10221 AND 10222):

In lieu of the second paragraph in Section 3.105 "Contract Bonds" of the Standard Specifications, the following shall be inserted:

2. Performance bond to guarantee the faithful performance of the contract. This bond must be equal to at least 100 percent of the total bid.

The two bonds shall be written by an admitted corporate surety.

SECTION 4 SCOPE OF WORK

4-1.01 WORK DESCRIPTION

The project consists of underground drainage construction and pavement reconstruction with hot mix asphalt concrete; including but not limited to concrete sidewalk, curb & gutter construction, pavement markings, and pedestrian ramp construction.

Such other items or details, not mentioned above, that are required by the Plans, Standard Specifications, Standard Plans, or these Special Provisions, shall be performed, placed, constructed, or installed.

4-1.02 INCREASED AND DECREASED QUANTITIES:

The County reserves the right to increase, decrease or delete the quantities of items as follows:

ITEM CODE.	ITEM
150715	Remove Thermoplastic Pavement Marking
153103	Cold Plane Asphalt Concrete Pavement
152438	Adjust Frame & Cover to Grade
731627	Minor Concrete (Curb, Gutter, Sidewalk & Curb Ramp)

The adjustment provision in Section 4-1.05 "Changes and Extra Work" of the Standard Specifications shall not apply to the above items.

Such other items or details, not mentioned above, that are required by the Plans, Standard Specifications, or these Special Provisions, shall be performed, placed, constructed, or installed.

4-1.03 BALANCING CHANGE ORDER:

Prior to submitting for the final estimate, a balancing change order adjusting quantities to reflect those actually used during construction will be issued.

SECTION 5 – CONTROL OF WORK

5-1.01 AREAS FOR CONTRACTOR'S USE:

Attention is directed to the requirements specified in Section 5-1.32, "Areas for Use," of the Standard Specifications and these Special Provisions.

The County right-of-way shall be used only for purposes that are necessary to perform the required work. The Contractor shall not occupy the right-of-way, or allow others to occupy the right-of-way, for purposes that are not necessary to perform the required work.

There are no County-owned parcels adjacent to the right-of-way for the exclusive use of the Contractor within the contract limits. The Contractor shall secure at his own expense any area required for plant sites, storage of equipment or materials, or for other purposes.

Use of the Contractor's work areas and other County-owned property shall be at the Contractor's own risk, and the County shall not be held liable for any damage to or loss of materials or equipment located within such areas.

The Contractor shall obtain encroachment permits prior to occupying County-owned parcels outside the contract limits. The required encroachment permits may be obtained from the MONTEREY COUNTY DEPARTMENT OF PUBLIC WORKS, 168 W ALISAL STREET 2ND FLOOR, SALINAS, CA 93901-2438.

Residence trailers will not be allowed within the county right-of-way.

The Contractor shall remove all equipment, materials, and rubbish from the work areas and other County-owned property, which he occupies and shall leave the areas in a presentable condition, in accordance with the provisions in Section 4-1.13, "Clean Up," of the Standard Specifications.

The Contractor shall secure at his own expense any area required for plant sites, storage of equipment or materials, or for other purposes if sufficient area is not available to him within the contract limits.

5-1.02 SUBCONTRACTING:

Attention is directed to Section 5-1.13, "Subcontracting" of the Standard Specifications.

No subcontract releases the Contractor from the contract or relieves the Contractor of their responsibility for a subcontractor's work.

If the Contractor violates Pub Cont Code § 4100 et seq., the County of Monterey may exercise the remedies provided under Pub Cont Code § 4110. The County of Monterey may refer the violation to the Contractors State License Board as provided under Pub Cont Code § 4111.

The Contractor shall perform work equaling at least 30 percent of the value of the original total bid with the Contactor's own employees and equipment, owned or rented, with or without operators.

5-1.03 ENCROACHMENT PERMIT:

Prior to start of work within the State of California's right-of-way or work affecting the State of California facilities, the contractor will be required to obtain an Encroachment Permit at the following State of California Transportation office:

California Department of Transportation
District 5, Permits Branch
Permit Engineer
50 Higuera Street
San Luis Obispo, CA 93401

Full compensation for doing all the work involved in obtaining Encroachment Permits from the California Department of Transportation as specified in the Standard Specifications, these special provisions, and as directed by the Engineer shall be considered as included in the contract price paid for the various items of work and no additional compensation will be allowed therefor.

SECTION 6 – CONTROL OF MATERIALS

6-1.01 GENERAL:

Attention is directed to Section 6, "Control of Materials," of the Standard Specifications and these Special Provisions.

All materials required to complete the work under this contract shall be furnished by the Contractor, except as noted on the Plans.

6-1.02 RELATIVE COMPACTION:

Wherever relative compaction is specified to be determined by Test Method No. California 216 or Test Method No. California 231 the relative compaction will be determined by Test Method No. California 231.

6-1.03 AUTHORIZED MATERIAL LIST:

The California State Department of Transportation maintains an Authorized Materials List. The Engineer shall not be precluded from sampling and testing products on the list of Authorized Materials List.

The manufacturer of products on the Authorized Materials List shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-3.05E, "Certificates of Compliance," of the Standard Specifications for each type of product supplied.

For those categories of materials included on the Authorized Materials List, only those products shown within the listing may be used in the work. Other categories of products, not included on the Authorized Materials List, may be used in the work provided they conform to the requirements of the Standard Specifications and as approved by the engineer.

For the Authorized Material Lists, go to: http://www.dot.ca.gov/hq/esc/approved_products_list

SECTION 7-LEGAL RELATIONS AND RESPONSIBILITY TO THE PUBLIC

7-1.01 LABOR NON DISCRIMINATION:

Attention is directed to the following Notice that is required by Chapter 5 of Division 4 of Title 2, California Code of Regulations.

NOTICE OF REQUIREMENT FOR NONDISCRIMINATION PROGRAM (GOV. CODE, SECTION 12990)

Your attention is called to the "Nondiscrimination Clause", set forth in Section 7-1.02I(2),

"Nondiscrimination," of the Standard Specifications, which is applicable to all nonexempt state contracts and subcontracts, and to the "Standard California Nondiscrimination Construction Contract Specifications" set forth therein. The Specifications are applicable to all nonexempt state construction contracts and subcontracts of \$5,000 or more.

7-1.02 LABOR CODE REQUIREMENT:

Attention is directed to Section 7-1.02K(5), "Working Hours," of the Standard Specifications.

7-1.03 GENERAL PREVAILING WAGE RATES:

Attention is directed to Section 7-1.02K(2), "Wages," of the Standard Specifications.

The general prevailing wage rates determined by the Director of Industrial Relations, for the county or counties in which the work is to be done, are available on the Internet at: <http://www.dir.ca.gov/dlsr/pwd/>. These wage rates are not included in the Bid book for the project. Changes, if any, to the general prevailing wage rates will be available at the same location.

The general prevailing rates of per diem, holiday, and overtime wages for each craft, classification, or type of worker needed to execute the contract are determined in accordance with Section 1770, et. seq., of the Labor Code; and the contractor shall comply with all applicable sections thereof.

The Contractor shall post the prevailing wage rates at the job site or as directed by the Engineer.

7-1.04 PAYROLL RECORDS:

The Contractor's attention is directed to Section 7- 1.02K(3), "Certified Payroll Records," of the Standard Specifications, and to the provisions of Labor Code, Section 1776 (Stats. 1978, Chapter 1249). The Contractor shall be responsible for the compliance with these provisions by his/her Subcontractors. The Contractor shall furnish the Engineer with certified payrolls and statement of benefits.

The Department withholds from progress payments for not submitting records for local employment of Monterey Bay Area residents.

7-1.05 SURFACE MINING AND RECLAMATION ACT:

Attention is directed to the Surface Mining and Reclamation Act of 1975, commencing in Public Resources Code, Mining and Geology, Section 2710, which establishes regulations pertinent to surface mining operations.

Material from mining operations furnished for this project shall only come from permitted sites in compliance with the Surface Mining and Reclamation Act of 1975.

The requirements of this section shall apply to all materials furnished for the project, except for acquisition of materials in conformance with Section 4-1.04, "Use of Materials Found on the Job Site," of the Standard Specifications.

7-1.06 PUBLIC SAFETY:

The Contractor shall provide for the safety of traffic and the public in conformance with the provisions in Section 7-1.04, "Public Safety," and Section 7-1.03, "Public Convenience" of the Standard Specifications and these special provisions.

7-1.07 INDEMNIFICATION AND INSURANCE:

Attention is directed to Section 7-1.05, "Indemnification" and Section 7-1.06 "Insurance," of the Standard Specifications and these Special Provisions.

In addition to all the requirements in Section 7-1.06D(2) of the Standard Specifications, the following additional requirements shall be met. An Additional Insured Endorsement to the Contractor's Liability insurance policy naming the County of Monterey, their officers, agents, and employees as additional insured's in the form approved by the County of Monterey shall also be furnished. A copy of the approved endorsement form may be obtained from the County of Monterey at the address to obtain bid packages as shown in the Notice to Bidders. The insurance afforded to the additional insured's is primary insurance and if the additional insured's have other insurance that might be applicable to any loss, the amount of this insurance shall not be reduced or prorated due to the existence of such other insurance.

The contractor's insurer agrees to waive subrogation claims against the County of Monterey, their officers, agents, and employees.

Evidence of insurance (Contractual Liability insurance and Additional Insured Endorsement) in compliance with the requirements herein shall be furnished to the County of Monterey by the Contractor with the Certificate of Insurance in the form as approved by the County of Monterey. A copy of the approved certificate form may be obtained from the County of Monterey at the address to obtain bid packages as shown in the Notice to Bidders. Certificates of insurance shall, without any qualification thereto, contain the following statement:

Should any of the described policies be canceled, modified, or reduced in limits before the expiration date thereof, the issuing company will mail 30 days' advance written notice to the named certificate holders.

The insurance shall be issued by a company or companies authorized to transact business in the State of California and shall have a rating of at least A- VII in accordance with the current Best's rating.

Insurance coverage in the minimum amounts set forth herein shall not be construed to relieve the Contractor for liability in excess of such coverage, nor shall it preclude the State of California or County of Monterey from taking such other actions as is available to them under any other provision of this contract (except retainage of money due to the Contractor) or otherwise in law.

Nothing in the contract is intended to create the public or any member thereof a third party beneficiary hereunder, nor is any term and condition or other provision of the contract intended to establish a standard of care owed to the public or any member thereof.

Prior to the execution of this Agreement by the County, Contractor shall file certificates of insurance with the County Contracts/Purchasing Department and with the County Director of Public Works, showing that the Contractor has in effect the insurance required by this Agreement. The Contractor shall file a new or amended certificate of insurance promptly after any change is made in any insurance policy that would alter the information of the certificate then on file. Acceptance or approval of insurance shall in no way modify or change the indemnification clause in this Agreement, which shall continue in full force and effect.

7-1.08 WORKERS' COMPENSATION AND EMPLOYER'S LIABILITY INSURANCE:

Attention is directed to Section 7-1.06C, "Workers' Compensation and Employer's Liability Insurance," of the Standard Specifications.

SECTION 8 - PROSECUTION AND PROGRESS

8-1.01 START OF JOB SITE ACTIVITIES, TIME , AND LIQUIDATED DAMAGES:

Attention is directed to the provisions in Section 8-1.04, "Start of Job Site Activities;" in Section 8-1.05 "Time", and in Section 8-1.10, "Liquidated Damages;" of the Standard Specifications and these Special Provisions.

The Contractor shall begin work within 15 calendar days of the issuance of the Notice to Proceed by the County of Monterey. This work shall be diligently prosecuted to completion before the expiration of 60 WORKING DAYS.

The Contractor shall pay to the County of Monterey the sum of \$1,900 per day, for each and every calendar day's delay in finishing the work in excess of the number of working days prescribed above.

8-1.02 PRE-CONSTRUCTION CONFERENCE:

In lieu of Section 8-1.03, "Preconstruction Conference," of the Standard Specifications, insert the following:

A pre-construction conference will be held at the office of the MONTEREY COUNTY DEPARTMENT OF PUBLIC WORKS, 855 E. LAUREL DRIVE, BUILDING D, SALINAS, CA, where the Notice to Proceed will be issued and for the purpose of discussing with the Contractor the scope of work, contract drawings, Specifications, existing conditions, materials to be ordered, equipment to be used, and all essential matters pertaining to the prosecution of and the satisfactory completion of the project as required. The Contractor's representatives at this conference shall include all major superintendents for the work and may include major subcontractors.

8-1.03 SCHEDULE:

Comply with Section 8-1.02(C), "Level 2 Critical Path Method Schedule," of the Standard Specifications, unless otherwise authorized in writing by the Engineer.

The schedule software must be Microsoft Project 2010.

Full compensation for submitting the required schedules shall be considered as included in the contract prices paid for the various items of work involved, and no additional compensation shall be allowed therefor.

SECTION 9 – PAYMENT

9-1.01 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS:

Attention is directed to the provisions in Sections 10262 and 10262.5 of the Public Contract

Code and Section 7108.5 of the Business and Professions Code concerning prompt payment to subcontractors.

A prime contractor or subcontractor shall pay any subcontractor not later than 7 days of receipt of each progress payment in accordance with the provision in Section 7108.5 of the California Business and Professions Code concerning prompt payment to subcontractors. The 7 days is applicable unless a longer period is agreed to in writing. Any delay or postponement of payment over 30 days may take place only for good cause and with the agency's prior written approval. Any violation of Section 7108.5 shall subject the violating contractor or subcontractor to the penalties, sanction and other remedies of that section. This requirement shall not be construed to limit or impair any contractual, administrative, or judicial remedies otherwise available to the contractor or subcontractor in the event of a dispute involving late payment or nonpayment by the prime contractor, deficient subcontract performance, or noncompliance by a subcontractor. This provision applies to both DBE and non-DBE subcontractors.

9-1.02 PAYMENT ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS:

Attention is directed to the requirements specified in Section 9-1.07, "Payment Adjustments for Price Index Fluctuations," of the Standard Specifications and these Special Provisions.

For the California statewide crude oil price index, go to:

<http://www.dot.ca.gov/hq/construc/crudeoilindex/>

This section does not apply if you opted out of Payment Adjustment for Price Index Fluctuations at the time of bid opening. A form is provided in the Bid Form.

9-1.03 PROGRESS PAYMENTS AND PAYMENTS AFTER CONTRACT ACCEPTANCE:

Attention is directed to Section 9-1.16, "Progress Payments," and 9-1.17 "Payment After Contract Acceptance," of the Standard Specifications and these special provisions.

In lieu of Section 9-1.16F, "Retentions," of the Standard Specifications, the following shall be inserted:

Progress payment shall not be made in excess of 95% of the actual work completed.
County shall withhold five (5) percent from progress payment until final completion and acceptance of the project by the Board of Supervisors.

In lieu of Section 9-1.16C, "Materials On Hand," of the Standard Specifications, the following shall be inserted:

No progress payment will be made for any materials on hand which are furnished but not incorporated in the work.

9-1.04 ARBITRATION:

Section 9-1.22, "Arbitration," as defined in the Standard Specifications, is deleted from this contract. In lieu of arbitration, the following shall apply (from the Public Contract Code):

A. Application of article; inclusion of article in plans and specifications (Public Contracts Codes 20104):

- 1a. This article applies to all public works claims of three hundred seventy-five thousand dollars (\$375,000) or less which arise between a Contractor and the County of Monterey.
- 1b. This article shall not apply to any claims resulting from a contract between the Contractor and the County of Monterey when the public agency has elected to resolve any disputes pursuant to Article 7.1 (commencing with Section 10240) of Chapter 1 of Part 2, of the Public Contract Code).
- 2a. "Public Work" has the same meaning as in Section 1101 of the Public Contract Code but does not include any work or improvement contracted for by the state or the Regents of the University of California.
- 2b. "Claim" means a separate demand by the Contractor for (A) a time extension, (B) payment of money or damages arising from work done by or on behalf of the Contractor pursuant to the contract for a public work and payment of which is not otherwise expressly provided for or the claimant is not otherwise entitled to, or (C) an amount the payment of which is disputed by the local agency.
3. The provisions of this article or a summary thereof shall be set forth in the plans or specifications for any work, which may give, rise to a claim under this article.
4. This article applies only to contracts entered into on or after January 1, 1991.

B. Claims; requirements (Public Contracts Codes 20104.2):

For any claim subject to this article, the following requirements apply:

1. The claim shall be in writing and include the documents necessary to substantiate the claim. Claims must be filed on or before the date of final payment. Nothing in this subdivision is intended to extend the time limit or supersede notice requirements otherwise provided by contract for the filing of claims.
- 2a. For Claims of less than fifty thousand dollars (\$50,000), the local agency shall respond in writing to any written claim within 45 days of receipt of the claim, or may request, in writing, within 30 days of receipt of the claim, any additional documentation supporting the claim or relating to defenses or claims the local agency may have against the claimant.
- 2b. If additional information is thereafter required, it shall be requested and provided pursuant to this subdivision, upon mutual agreement of the local agency and the claimant.
- 2c. The local agency's written response to the claim, as further documented, shall be submitted to the claimant within 15 days after receipt of the further documentation or

within a period of time no greater than that taken by the claimant in producing the additional information, whichever is greater.

- 3a. For claims of over fifty thousand dollars (\$50,000) and less than or equal to three hundred seventy-five thousand dollars (\$375,000), the local agency shall respond in writing to all written claims within 60 days of receipt of the claim, or may request, in writing, within 30 days of receipt of the claim, any additional documentation supporting the claim or relating to defenses or claims the local agency may have against the claimant.
- 3b. If additional information is thereafter required, it shall be requested and provided pursuant to this subdivision, upon mutual agreement of the local agency and the claimant.
- 3c. The local agency's written response to the claim, as further documented, shall be submitted to the claimant within 30 days after receipt of the further documentation, or within a period of time no greater than that taken by the claimant in producing the additional information or requested documentation, whichever is greater.
4. If the claimant disputes the local agency's written response, or the local agency fails to respond within the time prescribed, the claimant may so notify the local agency, in writing, either within 15 days of receipt of the local agency's response or within 15 days of the local agency's failure to respond within the time prescribed, respectively, and demand an informal conference to meet-and-confer for settlement of the issues in dispute. Upon a demand, the local agency shall schedule a meet-and-confer conference within 30 days for settlement of the dispute.
5. If following the meet-and-confer conference the claim or any portion remains in dispute, the claimant may file a claim pursuant to Chapter 1 (commencing with Section 900) and Chapter 2 (commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the Government Code. For purposes of those provisions, the running of the period of time within which a claim must be filed shall be tolled from the time the claimant submits his or her written claim pursuant to Section 915(a) of the Government Code until the time the claim is denied, including any period of time utilized by the meet and confer conference.

C. Procedures for civil actions filed to resolve claims (Public Contracts Codes 20104.4): The following procedures are established for all civil actions filed to resolve claims subject to this article:

1. Within 60 days, but no earlier than 30 days, following the filing or responsive pleadings, the court shall submit the matter to nonbinding mediation unless waived by mutual stipulation of both parties. The mediation process shall provide for the selection within 15 days by both parties of a disinterested third person as mediator, shall be commenced within 30 days of the submittal, and shall be concluded within 15 days from the commencement of the mediation unless a time requirement is extended upon a good cause showing to the court.

2a. If the matter remains in dispute, the case shall be submitted to judicial arbitration pursuant to Chapter 2.5 (commencing with Section 1141.10) Title 3 of Part 3 of the Code of Civil Procedure, notwithstanding Section 1141.11 of that code. The Civil Discovery Act of 1986 Article 3 (commencing with Section 2016) of Chapter 3 of Title 3 of Part 4 of the Code of Civil Procedure) shall apply to any proceeding brought under this subdivision consistent with the rules pertaining to judicial arbitration.

2b. In addition to Chapter 2.5 (commencing with Section 1141.10) of Title 3 of Part 3 of the Code of Civil Procedure, (A) arbitrators shall, when possible, be experienced in construction law, and (B) any party appealing an arbitration award who does not obtain a more favorable judgment shall, in addition to payment of costs and fees under that chapter, also pay the attorney's fees on appeal of the other party.

D. Payment by local agency of undisputed portion of claim; interest on arbitration award or judgment (Public Contracts Codes 2104.6):

1. The County of Monterey shall not fail to pay money as to any portion of a claim that is undisputed except as otherwise provided in the contract.
2. In any suit filed under Section 20104.4, Monterey County shall pay interest at the legal rate on any arbitration award or judgment. The interest shall begin to accrue the date the suit is filed in a court of law.

SECTION 10 – GENERAL

10-1.01 WORK SEQUENCING:

At least seven (7) calendar days prior to the beginning construction activities, notify all affected property owners, residents, businesses and agencies by an approved, written notice detailing streets and limits of work to be done and hours of work. At least seventy-two (72) hours prior to the beginning of activities that is impacted by on street parking, post all streets that are to be worked upon with approved “No parking – Tow Away” signs at 100’ intervals. State the day of the week and hour of no parking on these signs, in English and Spanish. The signs and notices are included in the price paid for Construction Area Signs. Adhere diligently to said written schedule in the prosecution of the work. You are responsible to notify the affected property owners and businesses on the day prior to pre-schedule work and to arrange for vehicles to be moved from the residences/businesses prior to start of the day’s work.

At the end of each working day if a difference in excess of 0.15 feet exists between the elevation of the existing pavement and the elevation of an excavation within 8 feet of the traveled way, place and compact material against the vertical cut adjacent to the traveled way. Place the material up to the top of the existing pavement and taper at a slope of 4:1 (horizontal:vertical) or flatter to the bottom of the excavation. For excavations within the traveled way, fill and compact with material to the level of the existing pavement or grade. During the excavation operation, you may use native material for this purpose except once the placing of the structural section starts, structural material must be used. Do not use treated base for the taper.

Before obliterating any pavement delineation (traffic stripes, pavement markings, and pavement

markers) that is to be replaced on the same alignment and location, as determined by the Engineer, the pavement delineation shall be referenced by the Contractor, with a sufficient number of control points to reestablish the alignment and location of the new pavement delineation. The references shall include the limits or changes in striping pattern, including one- and 2-way barrier lines, limit lines, crosswalks and other pavement markings. Full compensation for referencing existing pavement delineation shall be considered as included in the contract prices paid for new pavement delineation and no additional compensation will be allowed therefore.

Prior to applying hot mix asphalt (type A) on aggregate base, apply paint binder. On existing pavement surfaces, apply tack coat prior to placing hot mix asphalt (type A).

Prior to applying hot mix asphalt (type A) and tack coat, the Contractor shall cover all manholes, valve and monument covers, grates, or other exposed facilities located within the area of application, using a plastic or oil resistant construction paper secured to the facility being covered by tape or adhesive. The covered facilities shall be referenced by the Contractor, with a sufficient number of control points to relocate the facilities after the hot mix asphalt (type A) and tack coat have been placed. After completion of hot mix asphalt (type A) and tack coat operation, all covers shall be removed and disposed of in a manner satisfactory to the Engineer. Full compensation for covering manholes, valve and monument covers, grates, or other exposed facilities, referencing, and removing temporary cover shall be considered as included in the contract price paid per ton for hot mix asphalt (type A), and no additional compensation will be allowed therefor.

SECTION 12 TEMPORARY TRAFFIC CONTROL

12-1.01 FLAGGING COSTS:

Replace Section 12-1.03, "Flagging Costs," of the Standard Specifications the following with:

The cost of furnishing all flaggers, including transporting flaggers, to provide for passage of public traffic through the work under provisions in sections 7-1.03, "Public Convenience," and 7-1.04, "Public Safety," of the Standard Specifications and for providing stands or towers for use of flaggers shall be considered included in the prices paid for the various contract items of work and no additional compensation will be allowed therefor.

12-1.02 PORTABLE CHANGEABLE MESSAGE SIGN:

Portable changeable message signs shall be furnished, placed, operated, and maintained at locations designated by the Engineer and shall conform to the provisions in Section 12-3, "Traffic Handling Equipment and Devices," of the Standard Specifications and these special provisions. Messages displayed on the portable changeable message signs shall conform to Section 12-3.12 "Portable Changeable Message Signs," of the Standard Specifications and "Maintaining Traffic" of these special provisions."

Start displaying the message on the portable changeable message sign 30 minutes before closing the lane.

Place the portable changeable message sign in advance of the 1st warning sign for each:

1. Stationary lane closure
2. Connector closure
3. Shoulder closure
4. Speed reduction zone

A portable changeable message sign shall be placed during speed zone reductions. When used in conjunction with a lane closure, use one portable changeable message sign, with both the speed zone reduction and the lane closure messages.

Seven (7) calendar days prior to the start of work, portable changeable message signs shall be placed at minimum, at both begin and end limits of construction, warning the public of expected delays due to construction activities, as directed by the Engineer.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing, placing, operating, maintaining, repairing, transporting from location to location and removing the portable changeable message sign, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer shall be considered as included in the contract lump sum price paid for traffic control system.

12-1.03 IMPACT ATTENUATOR VEHICLE:

Replace Section 12-3.13, "Impact Attenuator Vehicle," of the Standard Specifications with:

SUMMARY

This section includes specifications for protecting traffic and workers with an impact attenuator vehicle during moving lane closures and when placing and removing components of stationary lane closures, ramp closures, shoulder closures, or a combination.

Impact attenuator vehicles must comply with the following test levels under National Cooperative Highway Research Program 350:

1. Test level 3 if the preconstruction posted speed limit is 50 mph or more
2. Test levels 2 or 3 if the preconstruction posted speed limit is 45 mph or less

Comply with the attenuator manufacturer's instructions for:

1. Support truck
2. Trailer-mounted operation
3. Truck-mounted operation

Flashing arrow signs must comply with section 12-3.03. You may use a portable changeable message sign instead of a flashing arrow sign. If a portable changeable message sign is used as a flashing arrow sign, it must comply with section 6F.56 "Arrow Panels" of the *California MUTCD*.

DEFINITIONS

impact attenuator vehicle: A support truck that is towing a deployed attenuator mounted to a trailer or a support truck with a deployed attenuator that is mounted to the support truck.

SUMBITTALS

Upon request, submit a certificate of compliance for each attenuator used on the project.

QUALITY CONTROL and ASSURANCE

Do not start impact attenuator vehicle activities until authorized.

Before starting impact attenuator vehicle activities, conduct a preinstallation meeting with the Engineer, subcontractors, and other parties involved with traffic control to discuss the operation of the impact attenuator vehicle during moving lane closures and when placing and removing components of stationary traffic control systems.

Schedule the location, time, and date for the preinstallation meeting with all participants. Furnish the facility for the preinstallation meeting within 5 miles of the job site or at another location if authorized.

MATERIALS

Attenuators must be a brand on the Authorized Material List for highway safety features.

The combined weight of the support truck and the attenuator must be at least 19,800 pounds, except the weight of the support truck must not be less than 16,100 or greater than 26,400 pounds.

For the Trinity MPS-350 truck-mounted attenuator, the support truck must not have a fuel tank mounted underneath within 10'-6" of the rear of the support truck.

Each impact attenuator vehicle must have:

1. Legal brake lights, taillights, sidelights, and turn signals
2. Inverted "V" chevron pattern placed across the entire rear of the attenuator composed of alternating 4-inch wide nonreflective black stripes and 4-inch wide yellow retroreflective stripes sloping at 45 degrees
3. Type II flashing arrow sign
4. Flashing or rotating amber light
5. Operable 2-way communication system for maintaining contact with workers

CONSTRUCTION

Except where prohibited, use an impact attenuator vehicle:

1. To follow behind equipment and workers who are placing and removing components of a stationary lane closure, ramp closure, shoulder closure, or any combination. Operate the flashing arrow sign in the arrow or caution mode during this activity, whichever applies.

- Follow at a distance that prevents intrusion into the workspace from passing traffic.
2. As a shadow vehicle in a moving lane closure.

After placing components of a stationary traffic control system you may place the impact attenuator vehicle in advance of the work area or at another authorized location to protect traffic and workers.

Secure objects, including equipment, tools, and ballast on impact attenuator vehicles to prevent loosening upon impact by an errant vehicle.

Do not use a damaged attenuator in the work. Replace any attenuator damaged from an impact during work activities at your expense.

PAYMENT

The cost for impact attenuator vehicle is included in the contract lump sum price paid for traffic control system.

12-1.04 MAINTAINING TRAFFIC:

Maintaining traffic shall conform to the provisions in Section 7-1.03, "Public Convenience," Section 7-1.04, "Public Safety," and Section 12-4, "Maintaining Traffic," of the Standard Specifications.

Closures shall conform to the provisions in Section 12-1.05, "Traffic Control System for Lane Closure," of these special provisions.

CLOSURE REQUIREMENTS

Closures are only allowed during the hours specified in this section "Maintaining Traffic," except for work required under Sections 7-1.03, "Public Convenience," and Section 7-1.04, "Public Safety" of the Standard Specifications.

The full width of the traveled way shall be open for use by public traffic when construction operations are not actively in progress.

On Union Street and Poole Street, you may conduct one-way reversing traffic control between 8:00 a.m. and 4:00 p.m. of each working day, Monday through Friday. Queuing of vehicles due to the one-way reversing traffic control shall not impact or interfere with the traffic on Merritt Street.

The alley may be closed to through traffic between 8:00 a.m. and 4:00 p.m. of each working day, Monday through Friday, except to local residents, mail carriers and municipal waste collectors.

Personal vehicles of the Contractor's employees shall not be parked on the traveled way or shoulders including sections closed to public traffic.

When work vehicles or equipment are parked on the shoulder within 6 feet of a traffic lane, the shoulder area shall be closed with fluorescent orange traffic cones or portable delineators placed

on a taper in advance of the parked vehicles or equipment and along the edge of the pavement at 25-foot intervals to a point not less than 25 feet past the last vehicle or piece of equipment. A minimum of 9 traffic cones or portable delineators shall be used for the taper. A W20-1 (ROAD WORK AHEAD) or W21-5b (RIGHT/LEFT SHOULDER CLOSED AHEAD) or C24(CA) (SHOULDER WORK AHEAD) sign shall be mounted on a crashworthy portable sign support with flags. The sign shall be placed where designated by the Engineer. The sign shall be a minimum of 48" x 48" in size. The Contractor shall immediately restore to the original position and location a traffic cone or delineator that is displaced or overturned, during the progress of work.

If minor deviations from the lane requirement charts are required, a written request shall be submitted to the Engineer at least 15 days before the proposed date of the closure. The Engineer may approve the deviations if there is no significant increase in the cost to the State and if the work can be expedited and better serve the public traffic.

Designated legal holidays for 2013 are:

Tuesday, January 1	New Year's Day
Monday, January 21	Martin Luther King, Jr. Birthday
Tuesday, February 12	Lincoln's Birthday
Monday, February 18	Presidents' Day
Monday, April 1	Cesar Chavez Day
Monday, May 27	Memorial Day
Thursday, July 4	Independence Day
Monday, September 2	Labor Day
Monday, October 14	Columbus Day
Monday, November 11	Veterans' Day
Thursday November 28	Thanksgiving Day
Friday, November 29	Day after Thanksgiving
Wednesday, December 25	Christmas Day

Full compensation for furnishing, erecting, maintaining, and removing and disposing of the W20-1, W21-5b, and C24(CA) signs shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefore.

For operations requiring lane closure, submit the contingency plan and discuss with the Engineer at least 5 business days before starting that operation. Submit any revisions to the contingency plan for an operation at least 5 business days before starting that operation. Do not close any lanes until the contingency plan has been authorized.

12-1.05 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE:

Replace Section 12-5, "Traffic Control System for Lane Closure," of the Standard Specifications with:

GENERAL

This section includes specifications for closing traffic lanes with stationary and moving lane closures on 2-lane, 2-way highways. The traffic control system for a lane closure must comply

with the details shown.

Traffic control system includes signs.

MATERIALS

Vehicles equipped with attenuators must comply with section 12-1.03, "Impact Attenuator Vehicle," of these special provisions.

A new attenuator that is proposed as equal to the authorized attenuators or attenuators ordered for recertification must not be used until authorized by the Engineer.

CONSTRUCTION

General

During traffic striping and pavement marker placement using bituminous adhesive, control traffic with a stationary or a moving lane closure. During other activities, control traffic with stationary lane closures.

Whenever components of the traffic control system are displaced or cease to operate or function as specified from any cause, immediately repair the components to the original condition or replace the components and restore the components to the original location.

Stationary Lane Closures

For a stationary lane closure made only for the work period, remove components of the traffic control system from the traveled way and shoulder, except for portable delineators placed along open trenches or excavation adjacent to the traveled way at the end of each work period. You may store the components at selected central locations designated by the Engineer within the limits of the highway.

For multilane highway lane closures, each vehicle used to place, maintain, and remove components of a traffic control system on a multilane highway must be equipped with a Type II flashing arrow sign that must be in operation whenever the vehicle is being used for placing, maintaining, or removing the components. Vehicles equipped with a Type II flashing arrow sign not involved in placing, maintaining or removing the components if operated within a stationary-type lane closure must only display the caution display mode. The sign must be controllable by the operator of the vehicle while the vehicle is in motion. If a flashing arrow sign is required for a lane closure, the flashing arrow sign must be operational before the lane closure is in place.

Use a pilot car to control traffic as ordered by the engineer. The pilot car must have radio contact with personnel in the work area. Operate the pilot car through the traffic control zone at a speed not greater than 25 miles per hour.

Moving Lane Closures

A changeable message sign used in a moving lane closure must comply with section 12-1.02,

“Portable Changeable Message Sign,” of these special provisions except the sign must be truck-mounted. The full operational height to the bottom of the sign may be less than 7 feet above the ground but must be as high as practicable.

A flashing arrow sign used in a moving lane closure must be truck-mounted. Operate the flashing arrow sign in the caution display mode whenever it is being used on a 2-lane, 2-way highway.

PAYMENT

Traffic control system for lane closure is paid for as traffic control system. Flagging costs are paid for as specified in section 12-1.01, “Flagging Costs,” of these special provisions.

A traffic control system required by change order work is paid for as a part of the change order work.

12-1.06 TEMPORARY PAVEMENT DELINEATION:

Replace Section 12-8, “Temporary Pavement Delineation,” of the Standard Specifications with:

GENERAL

Section 12-8 includes specifications for placing, applying, maintaining, and removing temporary pavement delineation.

Painted traffic stripe used for temporary delineation must comply with section 84-3. Apply 1 or 2 coats.

Temporary signing for no-passing zones must comply with section 12-3.06.

MATERIALS

Temporary Lane Line and Centerline Delineation

Temporary pavement markers must be the same color as the lane line or centerline markers being replaced. Temporary pavement markers must be one of the temporary pavement markers on the Authorized Material List for short-term day or night use, 14 days or less, or long-term day or night use, 180 days or less.

Temporary Edge Line Delineation

Temporary, removable, construction-grade striping and pavement marking tape must be one of the types on the Authorized Material List. Apply temporary, removable, construction-grade striping and pavement marking tape under the manufacturer's instructions.

CONSTRUCTION

General

Whenever work activities obliterate pavement delineation, place temporary or permanent

pavement delineation before opening the traveled way to traffic. Place lane line and centerline pavement delineation for traveled ways open to traffic. On multilane roadways, freeways, and expressways, place edge line delineation for traveled ways open to traffic.

Establish the alignment for temporary pavement delineation, including required lines or markers. Surfaces to receive an application of paint or removable traffic tape must be dry and free of dirt and loose material. Do not apply temporary pavement delineation over existing pavement delineation or other temporary pavement delineation. Maintain temporary pavement delineation until it is superseded or you replace it with a new striping detail of temporary pavement delineation or permanent pavement delineation.

Place temporary pavement delineation on or adjacent to lanes open to traffic for a maximum of 14 days. Before the end of the 14 days, place the permanent pavement delineation. If the permanent pavement delineation is not placed within the 14 days, replace the temporary pavement markers with additional temporary pavement delineation equivalent to the striping detail specified for the permanent pavement delineation for the area. The Department does not pay for the additional temporary pavement delineation.

When the Engineer determines the temporary pavement delineation is no longer required for the direction of traffic, remove the markers, underlying adhesive, and removable traffic tape from the final layer of surfacing and from the existing pavement to remain in place. Remove temporary pavement delineation that conflicts with any subsequent or new traffic pattern for the area.

Temporary Lane Line and Centerline Delineation

Whenever lane lines or centerlines are obliterated, the minimum lane line and centerline delineation must consist of temporary pavement markers placed longitudinally at intervals not exceeding 24 feet. The temporary pavement markers must be temporary pavement markers on the Authorized Material List for short-term day or night use, 14 days or less, or long-term day or night use, 180 days or less. Place temporary pavement markers under the manufacturer's instructions. Cement the markers to the surfacing with the adhesive recommended by the manufacturer, except do not use epoxy adhesive to place pavement markers in areas where removal of the markers will be required.

For temporary lane line or centerline delineation consisting entirely of temporary pavement markers, place the markers longitudinally at intervals not exceeding 24 feet.

Where no-passing centerline pavement delineation is obliterated, install the following temporary no-passing zone signs before opening lanes to traffic. Install a W20-1, "Road Work Ahead," sign from 1,000 feet to 2,000 feet in advance of a no-passing zone. Install a R4-1, "Do Not Pass," sign at the beginning of a no-passing zone and at 2,000-foot intervals within the no-passing zone. The Engineer determines the exact location of temporary no-passing zone signs. Maintain the temporary no-passing zone signs in place until you place the permanent no-passing centerline pavement delineation. Remove the temporary no-passing zone signs when the Engineer determines they are no longer required for the direction of traffic.

Temporary Edge Line Delineation

Whenever edge lines are obliterated on multilane roadways, freeways, and expressways, place edge line delineation for that area adjacent to lanes open to traffic consisting of (1) solid, 4-inch wide traffic stripe tape of the same color as the stripe being replaced, (2) traffic cones, (3) portable delineators or channelizers placed longitudinally at intervals not exceeding 100 feet. You may apply temporary painted traffic stripe where removal of the 4-inch wide traffic stripe will not be required.

The Engineer determines the lateral offset for traffic cones, portable delineators, and channelizers used for temporary edge line delineation. If traffic cones or portable delineators are used for temporary pavement delineation for edge lines, maintain the cones or delineators during hours of the day when the cones or delineators are being used for temporary edge line delineation.

Channelizers used for temporary edge line delineation must be an orange surface-mounted type. Cement channelizer bases to the pavement as specified in section 85 for cementing pavement markers to pavement except do not use epoxy adhesive to place channelizers on the top layer of the pavement. Channelizers must be one of the 36-inch, surface-mounted types on the Authorized Material List.

Remove the temporary edge line delineation when the Engineer determines it is no longer required for the direction of traffic.

PAYMENT

Full compensation for furnishing, placing, maintaining, and removing temporary delineation is considered as included in the contract prices paid for the items of work that obliterated the edgeline pavement delineation and no separate payment will be made therefore.

SECTION 13 – WATER POLLUTION CONTROL

13-1.01 WATER POLLUTION CONTROL PROGRAM:

Water Pollution Control shall conform to the provisions in Section 13, "Water Pollution Control," of the Standard Specifications and these special provisions.

Water Pollution Control Program is paid for as Prepare Water Pollution Control Program.

13-1.02 JOB SITE MANAGEMENT:

Job Site Management shall conform to the provisions in section 13-4, "Job Site Management" of the Standard Specifications.

Job site management is paid for as Construction Site Management.

13-1.03 TEMPORARY SEDIMENT CONTROL:

Temporary Sediment Control shall conform to the provisions in section 13-6, "Temporary Sediment Control" of the Standard Specifications and these special provisions.

Temporary Sediment Control is included in the contract price paid for Construction Site Management

SECTION 14 – ENVIRONMENTAL STEWARDSHIP

14-1.01 GENERAL:

Attention is directed to Section 14, "Environmental Stewardship," of the Standard Specifications and these Special Provisions.

14-1.02 NOISE AND VIBRATION:

NOISE CONTROL

Replace the 2nd paragraph in Section 14-8.02A of the Standard Specifications with the following:

Do not exceed 85 dBA (max) at 50 feet from the job site activities; where such noise will impact existing development.

Provide one Type 1 sound level meter and 1 acoustic calibrator to be used by the Department until Contract acceptance. Provide training by a person trained in noise monitoring to 1 Department employee designated by the Engineer. The sound level meter must be calibrated and certified by the manufacturer or other independent acoustical laboratory before delivery to the Department. Provide annual recalibration by the manufacturer or other independent acoustical laboratory. The sound level meter must be capable of taking measurements using the A-weighting network and the slow response settings. The measurement microphone must be fitted with a windscreen. The Department returns the equipment to you at Contract acceptance. Work specified in this paragraph is paid for as noise monitoring.

Full compensation for conforming to the requirements of this section shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

14-1.03 HAZARDOUS WASTE AND CONTAMINATION:

Hazardous Waste and Contamination shall conform to the provisions in Section 14-11, "Hazardous Waste and Contamination" of the Standard Specification. Attention is directed to Section 14-11.02A "Unanticipated Discovery of Asbestos and Hazardous Substance," and Section 14-11.02B "Hazardous Waste Management Practices" of the Standard Specification and this special provision.

If delay of work in the area, due to unanticipated discovery of asbestos or hazardous substances, delays the current controlling operation, the delay will be considered as right of way delay and the Contractor will be compensated for the delay in conformance with the provisions in Section 8-1.07, "Delays," of the Standard Specifications.

In conformance with Section 25914.1 of the Health and Safety Code, removal of asbestos or hazardous substances including exploratory work to identify and determine the extent of the asbestos or hazardous substance will be performed by separate contract.

The Department reserves the right to use other forces for exploratory work to identify and determine the extent of such material and for removing hazardous material from such area.

14-1.04 AIR QUALITY:

Comply with section 14-9, "Air Quality," of the Standard Specifications.

Dust control is included in the contract price paid for Construction Site Management.

SECTION 15 – EXISTING FACILITIES

The work performed in connection with various existing highway facilities shall conform to the provisions in Section 15, "Existing Highway Facilities," of the Standard Specifications and these special provisions.

15-1.01 COLD PLANING ASPHALT CONCRETE PAVEMENT:

GENERAL

Schedule cold planing activities so that not more than 7 working days elapses between the time the pavement is cold planed and the HMA is placed.

MATERIALS

Use the same quality of HMA for temporary tapers that is used for the HMA overlay or comply with the specifications for minor HMA in section 39.

CONSTRUCTION

General

Do not use a heating device to soften the pavement.

The cold planing machine must be:

1. Equipped with a cutter head width that matches the planing width. If the cutter head width is wider than the cold plane area shown, submit to the Engineer a request for using a wider cutter head. Do not cold plane unless the Engineer approves your request.
2. Equipped with automatic controls for the longitudinal grade and transverse slope of the cutter head and:
 - 2.1. If a ski device is used, it must be at least 30 feet long, rigid, and a 1-piece unit. The entire length must be used in activating the sensor.
 - 2.2. If referencing from existing pavement, the cold planing machine must be controlled by a self-contained grade reference system. The system must be used at or near the centerline of the roadway. On the adjacent pass with the cold planing machine, a joint-matching shoe may be used.
3. Equipped to effectively control dust generated by the planing operation

4. Operated so that no fumes or smoke is produced.

Replace broken, missing, or worn machine teeth.

Grade Control and Surface Smoothness

Furnish, install, and maintain grade and transverse slope references.

The depth, length, width, and shape of the cut must be as shown or as ordered. The final cut must result in a neat and uniform surface. Do not damage the remaining surface.

Where lanes are open to traffic, the drop-off of between adjacent lanes must not be more than 0.15 foot.

Temporary HMA Tapers

If a drop-off between the existing pavement and the planed area at transverse joints cannot be avoided before opening to traffic, construct a temporary HMA taper. The HMA temporary taper must be:

1. Placed to the level of the existing pavement and tapered on a slope of 30:1 (horizontal:vertical) or flatter to the level of the planed area
2. Compacted by any method that will produce a smooth riding surface

Completely remove temporary tapers before placing permanent surfacing.

Remove Planed Material

Remove cold planed material concurrent with planing activities so that removal does not lag more than 50 feet behind the planer.

PAYMENT

Payment for removal of pavement markers, thermoplastic traffic stripe, painted traffic stripe, and pavement marking within the area of cold planing is included in the payment for cold plane asphalt concrete pavement of the types shown in the Bid Item List.

Cold planing asphalt concrete pavement is paid for as Cold Plane Asphalt Concrete Pavement.

15-1.02 OBSTRUCTION:

Attention is directed to Section 15, "Existing Highway Facilities," and Section 5-1.36, "Property and Facility Preservation," of the Standard Specifications and these special provisions.

The Contractor shall notify in writing the following utilities and agencies five days prior to the beginning of construction:

Castroville Water District
Water and Sewer

AT & T California
Contact: Bill Kuhne

Contact: Eric Tynan
Tel: (831)633-2560
1499 Geil Street
Castroville, CA 95012

Tel: (408)754-8490
340 Pajaro Street
Salinas CA 93901

PG&E
Contact: David McKenna
Tel: (831)784-3295
401 Work St
Salinas CA 93901

Storm Water – Monterey County
Contact: Shawn Atkins
Tel: (831)755-4924
855 E. Laurel Drive, Bldg. B
Salinas CA 93905

Charter Communications
Contact: Rich Furtado
Tel: (408)612-6145
8120 Camino Arroyo
Gilroy, CA 95020-5123

The Contractor's attention is directed to the existence of certain underground facilities that may require special precautions be taken by the Contractor to protect the health, safety and welfare of workmen and of the public. Facilities requiring special precautions include, but are not limited to: conductors of petroleum products, oxygen, chlorine, and toxic or flammable gases; natural gas in pipelines greater than 6 inches in diameter or pipelines operating at pressures greater than 60 psi (gage); underground electric supply system conductors or cables, with potential to ground of more than 300 volts, either directly buried or in duct or conduit which does not have concentric grounded conductors or other effectively grounded metal shields or sheaths.

As the first order of work, the contractor shall pothole all utility crossings shown on the plans and obtains measurements to the top of the pipe from a fixed recoverable point marked on the ground adjacent to the pothole.

The Contractor shall notify the Engineer and the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar days, prior to performing any excavation or other work close to any underground pipeline, conduit, duct, wire or other structure. Regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert-Northern California (USA)	(800) 642-2444 (800) 227-2600
Western Utilities Underground Alert (Inc.)	(800) 424-3447

Full compensation for conforming to the provisions in this section not otherwise provided for, shall be considered in prices paid for the various contract items of work involved and no additional compensation shall be allowed therefor.

SECTION 19 – EARTHWORK

19-1.01 SHOULDER BACKING:

Comply with section 19-9, “Shoulder Backing,” of the Standard Specifications.

Shoulder backing is paid for as Imported Material (Shoulder Backing).

SECTION 39 – HOT MIX ASPHALT

39-1.01 HOT MIX ASPHALT (TYPE A):

Comply with Section 39, “Hot Mix Asphalt,” of the Standard Specifications and these special provisions.

Produce and place HMA Type A under the standard construction process.

Asphalt binder used in HMA Type A must be PG 64-10.

Aggregate used in HMA Type A must comply with the 3/4-inch HMA Types A and B gradation.

If you perform half-width paving, at the end of each day's work the distance between the ends of adjacent surfaced lanes must not be greater than can be completed in the following day of normal paving.

Before opening the lane to public traffic, pave shoulders and median borders adjacent to a lane being paved.

Do not leave a vertical joint more than 0.15 foot high between adjacent lanes open to public traffic.

If widening existing pavement, construct new pavement structure on both sides of the existing pavement to match the elevation of the existing pavement's edge at each location before placing HMA over the existing pavement.

Payment for paint binder and tack coat required for placement of HMA Type A is included in the contract price paid for Hot Mix Asphalt Type A.

SECTION 51 – CONCRETE STRUCTURES

51-1.01 MINOR CONCRETE (MINOR STRUCTURE):

Replace Section 51-7.02 in the Standard Specifications with:

This section includes specifications for constructing PC drainage inlets.

Type I, Type II, and Type D drainage inlets must be fabricated of PC concrete.

SUBMITTALS

For inlets with oval or circular cross sections, submit shop drawings with calculations. Shop drawings and calculations must be sealed and signed by an engineer who is registered as a civil engineer in the State. Allow 5 days for the Engineer's review.

Submit field repair procedures and a patching material test sample before repairs are made. Allow 5 days for the Engineer's review.

QUALITY CONTROL AND ASSURANCE

The Engineer may reject PC drainage inlets exhibiting any of the following:

1. Cracks passing through walls more than 1/16 inch wide
2. Nonrepairable honeycombed or spalled areas of more than 6 square inches
3. Noncompliance with reinforcement tolerances or cross sectional area shown
4. Wall or lid less than minimum thickness
5. Internal dimensions less than plan dimensions by 1 percent or 1/2 inch, whichever is greater
6. Defects affecting performance or structural integrity

MATERIALS

General

Nonshrink grout must be a dry, packaged type complying with ASTM C 1107.

Concrete for basin or inlet floors placed in the field must comply with the specifications for minor concrete.

Joint sealant must be butyl-rubber complying with ASTM C 990. Joint primer must be recommended by the joint seal manufacturer.

Resilient connectors must comply with ASTM C 923.

Sand bedding must comply with section 19-3.02E.

Bonding agents must comply with ASTM C 1059, Type II.

Fabrication

If oval or circular shape cross-sections are furnished, they must comply with *AASHTO LRFD Bridge Design Specifications, Fourth Edition with California Amendments*.

Reinforcement placement must not vary more than 1/2 inch from the positions shown.

Cure PC drainage inlets under section 90-4.03.

CONSTRUCTION

Repair PC drainage inlet sections to correct damage from handling or manufacturing imperfections before installation.

Center pipes in openings to provide a uniform gap. Seal gaps between the pipe and the inlet opening with nonshrink grout under the grout manufacturer's instructions. For systems designated as watertight, seal these gaps with resilient connectors.

Match fit keyed joints to ensure uniform alignment of walls and lids. Keys are not required at the inlet floor level if the floor is precast integrally with the inlet wall. Seal keyed joint locations with preformed butyl rubber joint sealant. You may seal the upper lid and wall joint with grout.

Clean keyed joint surfaces before installing sealant. Joint surfaces must be free of imperfections that may affect the joint. Use a primer if surface moisture is present. Use a sealant size recommended by the sealant manufacturer. Set joints using sealant to create a uniform bearing surface.

Flat drainage inlet floors must have a field-cast topping layer at least 2 inches thick with a slope of 4:1 (horizontal:vertical) toward the outlet. Use a bonding agent when placing the topping layer. Apply the bonding agent under the manufacturer's instructions.

PAYMENT

Minor concrete (minor structure) for drainage inlets, including modifying or removal of existing drainage inlets, is paid for as Minor Concrete (Minor Structure-Catch Basin).

SECTION 64 – PLASTIC PIPE

64-1.01 HIGH DENSITY POLYETHYLENE (HDPE) PIPE:

Comply with section 64, "Plastic Pipe," of the Standard Specifications.

HDPE pipe including structure excavation, structure backfill and connecting new pipe to existing or new facilities, is paid for as 18-inch Storm Drain Pipe.

Minor concrete (cap) for utility conflict is paid for as Minor Concrete (Curb, Gutter, Sidewalk and Curb Ramp).

SECTION 65 – CONCRETE PIPE

65-1.01 REINFORCED CONCRETE PIPE (RCP):

Comply with section 65, "Concrete Pipe," of the Standard Specifications.

Reinforced concrete pipe, including structure excavation, structure backfill and connecting new pipe to existing or new facilities, is paid for as 12-inch Storm Drain Pipe.

Minor concrete (cap) for utility conflict is paid for as Minor Concrete (Curb, Gutter, Sidewalk and Curb Ramp).

SECTION 73 – CONCRETE CURB AND SIDEWALKPIPE

73-1.01 CURB, GUTTER, SIDEWALK, DRIVEWAY & CURB RAMP:

Comply with section 73, “Concrete Curb and Sidewalks,” of the Standard Specifications.

Curb, gutter, sidewalk, driveway, and curb ramp, including detectable warning surface, is paid for as Minor Concrete (Curb, Gutter, Sidewalk and Curb Ramp).

APPENDIX I - SAMPLE CONTRACT

SAMPLE CONTRACT

CONTRACT FOR PUBLIC WORK

COUNTY OF MONTEREY

STATE OF CALIFORNIA

PROJECT NO. 13-142465

THIS AGREEMENT, made in triplicate by and between the COUNTY OF MONTEREY, a political subdivision of the State of California, hereinafter called the "County," and _____, hereinafter called the "Contractor," WITNESSETH:

(1) THE WORK

The Contractor shall do all the work and furnish all the materials, except such as are mentioned in any of the contract documents to be furnished by the County, necessary to construct and complete in a good, workmanlike and substantial manner and to the satisfaction of the County, the following public work:

CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465

in accordance with this agreement and with all of the following additional contract documents which are incorporated into and made a part of this agreement:

- (a) The Standard Specifications, dated May 2010, and the Standard Plans, dated May 2010, including issued revision through January 18, 2013, of the State of California, Department of Transportation.
- (b) A set of plans and cross sections (when applicable) entitled:

DRAINAGE AND ROAD IMPROVEMENTS
ON UNION STREET AND ALLEY 1CV51 IN CASTROVILLE
PROJECT NO. 13-142465
- (c) The Special Provisions for the work
- (d) The Notice to Bidders calling for bids
- (e) The Payment and Performance bonds required
- (g) Certificate of Insurance

(h) The accepted bid/proposal including the following:

- (1) List of Subcontractors
- (2) Equal Employment Opportunity Certification
- (3) Public Contract Code
 - Section 10285.1 Statement
 - Section 10162 Questionnaire
 - Section 10232 Statement
- (4) Noncollusion Declaration
- (5) Debarment and Suspension Certification
- (6) Statement Concerning Employment of Undocumented Aliens
- (7) Contractor's Certificate as to Worker's Compensation
- (8) Waiver for Payment Adjustments for Price Index Fluctuations
- (9) Contractor's Certification of Good-Faith Effort to Employ Monterey Bay Area Residents
- (10) List of Satisfied Public Agencies
- (11) Bidder's Bond

All contract documents are intended to cooperate, so that any work called for in one and not mentioned in another is to be executed the same as if mentioned in all. However, should there be any conflict between the terms of this instrument and the Contractor's bid or proposal, then this instrument shall control.

2. WORKERS' COMPENSATION

In accordance with the provisions of Section 3700 of the Labor Code, the Contractor and every Subcontractor will be required to secure the payment of compensation to his employees.

3. CONTRACT PRICE

The County shall pay the Contractor the following prices for the performance of this contract:

CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
 BETWEEN UNION STREET AND POOLE STREET
 PROJECT NO. 13-142465

Item No.	Item Code	F S	Description	Unit	Quantity	Unit cost	Amount
1	74016		Construction Site Management	LS	1		
2	74017		Prepare Water Pollution Control Program	LS	1		
3	120090		Construction Area Signs	LS	1		

Item No.	Item Code	F S	Description	Unit	Quantity	Unit cost	Amount
4	120100	S	Traffic Control System	LS	1		
5	150715		Remove Thermoplastic Pavement Marking	SQFT	125		
6	151531		Reconstruct Fence	LF	128		
7	152438		Adjust Frame & Cover to Grade	EA	2		
8	153103		Cold Plane Asphalt Concrete Pavement	SQYD	343		
9	160101		Clearing & Grubbing	LS	1		
10	190101	F	Roadway Excavation	CY	423		
11	198007		Imported Material (Shoulder Backing)	TON	33		
12	260201		Class 2 Aggregate Base	CY	261		
13	390132		Hot Mix Asphalt (Type A)	TON	282		
14	510502		Minor Concrete (Minor Structure-Catch Basin)	EA	5		
15	641107		18" Plastic Pipe	LF	319		
16	650010		12" Reinforced Concrete Pipe	LF	89		
17	650014		18" Reinforced Concrete Pipe	LF	44		
18	731627		Minor Concrete (Curb, Gutter, Sidewalk & Curb Ramp)	CY	57		
19	840504	S	4" Thermoplastic Traffic Stripe	LF	100		
20	840515	S	Thermoplastic Pavement Markings	SQFT	125		
TOTAL COST							

F – Final Pay Item
S – Specialty Item

IN WITNESS WHEREOF, the parties hereto have executed this Agreement as of the dates appearing below their respective signatures.

CONTRACTOR:

(Name of Company)

By: _____
Signature of Chair, President, or Vice-President

By: _____
Signature of Secretary, Asst. Secretary, CFO,
Treasurer or Asst. Treasurer*

Printed Name and Title

Printed Name and Title

Date: _____

Date: _____

COUNTY OF MONTEREY:

APPROVE AS TO FISCAL TERMS

By: _____

By: _____

Name: Robert K. Murdoch, P.E.

Name: Gary Giboney

Title: Director of Public Works

Title: Chief Deputy Auditor-Controller

Dated: _____

Date: _____

APPROVE AS TO FORM

APPROVE AS TO INDEMNITY/
INSURANCE LANGUAGE

By: _____

By: _____

Name: Cynthia L. Hasson

Name: Steven F. Mauck

Title: Deputy County Counsel

Title: Risk Manager

Date: _____

Date: _____

***INSTRUCTIONS:** If CONTRACTOR is a corporation, including limited liability and non-profit corporations, the full legal name of the corporation shall be set forth above together with the signatures of two specified officers. If CONTRACTOR is a partnership, the name of the partnership shall be set forth above together with the signature of a partner who has authority to execute this AGREEMENT on behalf of the partnership. If CONTRACTOR is contracting in an individual capacity, the individual shall set forth the name of the business, if any, and shall personally sign the AGREEMENT.

COUNTY OF MONTEREY

PAYMENT BOND

(Civil Code Section 9550)

WHEREAS, the County of Monterey has awarded to Principal, as Contractor, a contract for the following project:

CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465

AND WHEREAS, Principal, as Contractor, is required to furnish a bond in connection with said contract, to secure the payment of claims of laborers, mechanics, materialmen, and other persons furnishing labor and materials on the project, as provided by law.

NOW, THEREFORE, we _____, as Principal,
and _____
_____ as Surety, are held and firmly bound unto the County of Monterey, a political subdivision of the State of California (hereinafter called "County"), and to the persons named in California Civil Code section 9100 in the penal sum of _____ Dollars (\$ _____) for the payment of which sum in lawful money of the United States, well and truly to be made, we bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH THAT:

If the Principal, or any of Principal's heirs, executors, administrators, successors, assigns, or Subcontractors, (1) fails to pay in full all of the persons named in Civil Code Section 9100 with respect to any labor or materials furnished by said persons on the project described above, or (2) fails to pay in full all amounts due under the California Unemployment Insurance Code with respect to work or labor performed on the project described above, or (3) fails to pay for any amounts required to be deducted, withheld, and paid over to the Employment Development Department from the wages of employees of the Principal and Subcontractors pursuant to Unemployment Insurance Code section 13020 with respect to such work and labor, then the Surety shall pay for the same.

Surety hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the contract on the call for bids, or to the work to be performed there under, or the specifications accompanying the same, shall in any way affect its obligation under this bond, and it does hereby waive notice of any such change, extension of time, alteration or addition to the terms of said contract or the call for bids, or to the work, or to the specifications.

If suit is brought upon this bond by the County and judgment is recovered, the Surety shall pay all litigation expenses incurred by the County in such suit, including attorney's fees, court costs, expert witness fees and investigation expenses.

This bond inures to the benefit of any of the persons named in Civil Code section 9100, and such persons or their assigns shall have a right of action in any suit brought upon this bond, subject to any limitations set forth in Civil Code sections 9550 et seq. (Civil Code, Division 4, Part 6, Title 3, Chapter 5: Payment Bond for Public Works).

IN WITNESS WHERE OF the above-bounden parties have executed this instrument under their several seals this _____ day of _____, 20____, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

(Corporate Seal)

Principal

By _____

Name and Title _____

(Corporate Seal)

Surety

By _____

Name and Title _____

(Attach notary acknowledgement for all signatures and original or certified copy of unresolved appointment, attorney-in-fact certificate, power of attorney, by laws, or other instrument entitling or authorizing person executing bond on behalf of Surety to do so.)

COUNTY OF MONTEREY

PERFORMANCE BOND

WHEREAS, the County of Monterey has awarded to Principal, _____
as Contractor, a contract for the following project:

CASTROVILLE DRAINAGE AND ROAD IMPROVEMENTS
BETWEEN UNION STREET AND POOLE STREET
PROJECT NO. 13-142465

WHEREAS, Principal, as Contractor, is required to furnish a bond in connection with said
contract, to secure the faithful performance of said contract.

NOW, THEREFORE, we _____, as Principal,
and _____
_____ as Surety, are held and firmly
bound unto the County of Monterey, a political subdivision of the State of California (hereinafter
called "County"), in the penal sum of _____
Dollars (\$ _____), for the payment of which sum in lawful money of the United
States, well and truly to be made, we bind ourselves, our heirs, executors, administrators,
successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH THAT:

If the Principal, as Contractor, or Principal's heirs, executors, administrators, successors,
or assigns, (1) shall in all things stand to and abide by and well and truly keep and perform the
covenants, conditions, and agreements in said contract and any alteration thereof made as therein
provided, on Principal's part to be kept and performed, at the time and in the manner therein
specified and in all respects according to their true intent and meaning, and (2) shall defend,
indemnify and save harmless the County, the members of its board of supervisors, and its
officers, agents and employees as therein stipulated, then this obligation shall become null and
void; otherwise, it shall be and remain in full force and virtue.

Surety hereby stipulates and agrees that no change, extension of time, alteration, or addition
to the terms of the contract or the call for bids, or to the work to be performed thereunder, or the
specifications accompanying the same, shall in any way affect its obligation under this bond, and
it does hereby waive notice of any such change, extension of time, alteration or addition to the
terms of said contract or the call for bids, or to the work, or to the specifications.

Whenever the Principal, as Contractor, is in default, and is declared in default, under the
contract by the County of Monterey, the County of Monterey having performed its obligation
under the contract, Surety may promptly remedy the default, or shall promptly:

- (1) Complete the contract in accordance with its terms or conditions, or
- (2) Obtain a bid or bids for submission to County of Monterey for completing the
contract in accordance with its terms or conditions, and upon determination by
County of Monterey and Surety of the lowest responsible and responsive bidder,

arrange for a contract between such bidder and County of Monterey, and make available as work progresses (even though there should be a default or a succession of defaults under the contract or contracts of completion arranged under this paragraph) sufficient funds to pay the cost of completion less the balance of contract price.

If suit is brought upon this bond by the County and judgment is recovered, the Surety shall pay all litigation expenses incurred by the County in such suit, including attorney's fees, court costs, expert witness fees and investigation expenses.

IN WITNESS WHEREOF, the above-bounden parties have executed this instrument under their several seals this _____ day of _____, 20____, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

(Corporate Seal)

Principal

By _____

Name and Title _____

(Corporate Seal)

Surety

By _____

Name and Title _____

(Attach notary acknowledgement for all signatures and original or certified copy of unresolved appointment, attorney-in-fact certificate, power of attorney, by laws, or other instrument entitling or authorizing person executing bond on behalf of Surety to do so.)

