Before the Zoning Administrator in and for the County of Monterey, State of California

In the matter of the application of:

LARSON (PLN190317)

RESOLUTION NO. 20-003

Resolution by the Monterey County Zoning Administrator:

- 1. Finding that the project involves the construction of a new single family dwelling and an accessory structure, which qualifies as a Class 3 Categorical Exemption pursuant to Sections 15303(a) and 15303(e) of the CEQA Guidelines, and there are no exceptions pursuant to Section 15300.2; and
- 2. Approving a Design Approval to allow the construction of a 2,417 square foot one-story single family dwelling with a 758 square foot partial basement, an attached 505 square foot garage, and a 6 foot tall redwood fence with a Landscape Plan on a vacant lot. Grading would be approximately 190 cubic yards of cut/165 cubic yards of fill.

[PLN190317 – Carl and Gina Larson 3052 Larkin Road, Pebble Beach, Greater Monterey Peninsula Area Plan (APN: 007-483-006-000)]

The LARSON application (PLN190317) came on for a public hearing before the Monterey County Zoning Administrator on January 9, 2020. Having considered all the written and documentary evidence, the administrative record, the staff report, oral testimony, and other evidence presented, the Monterey County Zoning Administrator finds and decides as follows:

FINDINGS

1. **FINDING: CONSISTENCY** – The project, as conditioned, is consistent with the applicable plans and policies which designate this area as appropriate

for development.

EVIDENCE: a) The project has been reviewed for consistency with the text, policies, and regulations in:

- 2010 Monterey County General Plan (General Plan);
- Greater Monterey Peninsula Area Plan;
- Monterey County Zoning Ordinance (Title 21, or MCC);

No conflicts were found to exist.

- b) Allowed Use. The property is located at 3052 Larkin Road, Pebble Beach, Greater Monterey Peninsula Area Plan (Assessor's Parcel Number: 007-483-006-000). The subject parcel is zoned Medium Density Residential with a Building Site 6, Recreation Equipment Storage and Design Control Overlays, or "MDR/B-6-D-RES." Per Monterey County Code Section 21.12.030, a single family dwelling is an allowed use in the MDR zone subject to a Design Approval.
- Lot Legality. The subject parcel is 0.24 acres (APN 007-483-006-000), and is located in a residential subdivision created through the Monterey Peninsula Country Club Subdivision 1. It is identified as Lot 9 in Block 55 on the Final Map for the Monterey Peninsula Country Club Subdivision No. 1, recorded May 4, 1925 (Volume 3, Cities & Towns, Page 26. Therefore, the subject parcel is a legal lot of record.
- d) <u>Design</u>. Pursuant to Chapter 21.44 of Title 21, the project site and surrounding area is subject to the Design Control Zoning District ("D" zoning overlay), which is intended to regulate the location, size, configuration, materials, and colors of structures and fences to assure the protection of the public viewshed and neighborhood character. The proposed single family dwelling is a contemporary Ranch style home. The residence and garage are proposed to have colors and materials consisting of tan stucco siding with dark brown wood trim and front door, exterior stone accents, and brown shake tile roof. The proposed 6 foot tall fence is natural redwood. The neighborhood has variety of architectural styles. The proposed colors and materials would blend with the surrounding environment. The materials, location and nature of the project are consistent with the overall neighborhood character and will not detract from the visual integrity of the site.
- e) <u>Visual Resources</u>. The project will not impact any visual resources. Figure 14 of the Greater Monterey Peninsula Area Plan illustrates that the subject property is not designated as a visually sensitive or highly sensitive area. The property is not visible from Highway 1 or Highway 68. The proposed single family dwelling and accessory structure are within an established residential neighborhood of the inland (Country Club) area of Pebble Beach. The project will not create any new visual impacts.
- f) Review of Development Standards. The subject parcel is zoned Medium Density Residential with Building Site 6, Recreation Equipment Storage and Design Control Overlays, or "MDR/B-6-D-RES." Per Sections 21.12.030 of Title 21, the single family dwelling is an allowed use that would be subject to Design Approval. The parcel was created through the Monterey Peninsula Country Club Subdivision 1. A variance (ZA00595) was granted in 1969 that identified special setbacks for main structures and accessory structures for MDR zoning districts within the Del Monte Forest Country Club Area. The variance identified a 15 foot front setback for lots that front on roads over 50 feet in width or 20 foot setback for all other lots, and a 10 foot side and rear setback, except for 2nd stories, which require a 20 foot side setback. The subject property does not front along a road over 50 feet in width; therefore, the 15

foot front setback does not apply. Furthermore, the development is single-story. The project conforms to the site developments standards in Title 21.

The minimum setback required for this property is a front setback of 20 feet and a side and rear setback of 10 feet. Consistent with these standards, the main structure maintains a 20 foot, 2 inch front setback, 10 foot side and rear setbacks. The allowable height is 27 feet, and the proposed project height is 18 feet 3 inches. The maximum building site coverage allowed is 35%, (3,683 square feet) and the coverage is 34% (3,591 square feet). The project complies with the development standards listed within this zoning district per Section 21.12.060 of Title 21.

- g) <u>Cultural Resources.</u> The subject property is currently a vacant lot, and the project site is mapped in County GIS as a high archaeologically sensitive area. An archaeological report (County RMA-Planning Library No. LIB190271) was prepared and provided to the County that concluded there were no significant archaeological resources identified on the subject property. There are various historic sites within the area of the Del Monte Forest and Pacific Grove. The closest site is over two-thousand feet (0.38 miles) from the subject property. The potential for inadvertent impacts to cultural resources is addressed through incorporation of a standard condition of approval, which requires the contractor to stop work while resources are evaluated if previously unidentified resources are discovered during construction (Condition 3).
- h) Based on the LUAC procedure guidelines adopted by the Monterey County Board of Supervisors, the project was referred to the Del Monte Forest Land Use Advisory Committee (LUAC) for review on December 5, 2019. The LUAC unanimously recommended approval of the project as proposed.
- i) Staff conducted a virtual site inspection on November 20, 2019 to verify that the staked and flagged project on the subject property conforms to the plans submitted.
- j) The application, plans, and supporting materials submitted by the project applicant to Monterey County RMA-Planning for the proposed development found in RMA-Planning File No. PLN190317.
- 2. **FINDING: SITE SUITABILITY** The site is physically suitable for the proposed use.
 - **EVIDENCE:** a) The project includes a new single family dwelling and accessory structure associated with an established residential neighborhood.
 - b) The following reports have been prepared and submitted with the application:
 - Soil Engineering Investigation (LIB190273) prepared by Landset Engineers, Inc., Salinas, CA in August 2019
 - Archaeological Assessment (LIB190271) prepared by Susan Morley, Marina, CA in July 2019

County staff independently reviewed these reports and concurs with their conclusions. There are no further physical or environmental constraints that would indicate that the site is not suitable for the use proposed. All development shall be in accordance with these reports. c) The application, plans and supporting materials submitted by the project applicant to Monterey County RMA-Planning for the proposed development are found in Project File PLN190317.

3. **FINDING:**

HEALTH AND SAFETY – The establishment, maintenance, or operation of the project applied for will not under the circumstances of this particular case be detrimental to the health, safety, peace, morals, comfort, and general welfare of persons residing or working in the neighborhood of such proposed use, or be detrimental or injurious to property and improvements in the neighborhood or to the general welfare of the County.

EVIDENCE: a)

- The project was reviewed by RMA-Planning, and conditions have been recommended, where appropriate, to ensure that the project will not have an adverse effect on the health, safety, and welfare of persons either residing or working in the neighborhood.
- b) Necessary public facilities are existing on the subject property. Pebble Beach Community Sewer District will serve the property.
- c) The property has a permitted well that has been demonstrated through repeated testing to have the capacity to serve the property. A test in 2005 showed adequate water availability for a single family dwelling. Results from recent tests in May and November, 2019 by Carmel Valley Pump and Backflow Service (Michael Anderson, 2019) showed flow level at 3.9 gallons per minute and adequate water quality for the use. The report was submitted to the Drinking Water Protection Program of Environmental Health Bureau (EHB) for approval. All contaminants were under the maximum allowable levels; however, the applicant elected to install a water treatment system, which will be reviewed by EHB.
- d) The project includes grading of 190 cubic yards of cut and 165 cubic yards of fill. The project includes a Grading Plan and Erosion Control Plan that would be subject to review by RMA-Environmental Services prior to the issuance of a construction permit.
- e) The application, plans, and supporting materials submitted by the project applicant to Monterey County RMA-Planning for the proposed development found in RMA-Planning File No. PLN190317.

4. **FINDING:**

NO VIOLATIONS – The subject property is in compliance with all rules and regulations pertaining to zoning uses, subdivision, and any other applicable provisions of the County's zoning ordinance. No violations exist on the property.

EVIDENCE: a)

- Staff reviewed Monterey County RMA-Planning and RMA-Building Services records and is not aware of any violations existing on subject property.
- b) An unmet condition for a tree removal permit on the property is met through the addition of two (2) five-gallon Monterey pine saplings to the Landscape Plan. Compliance with the condition, for the two trees to survive and establish, will be incorporated into this project's building permit.
- c) The application, plans and supporting materials submitted by the project applicant to Monterey County RMA-Planning for the proposed development are found in Project File PLN190317.

5. **FINDING: CEQA (Exempt)** – The project is categorically exempt from environmental review and no unusual circumstances were identified to exist for the proposed project.

EVIDENCE: a) California Environmental Quality Act (CEQA) Guidelines Sections 15303(a) and 15303(e) categorically exempts the construction of one single family dwelling and accessory structures in a residential area.

- b) The proposed project is to construct a 3,174 square foot single family dwelling and a 6 foot tall redwood fence enclosing the backyard and side yards of the dwelling. Therefore, the project qualifies for a Class 3 categorical exemption pursuant to Sections 15303(a) and 15303(e) of the CEOA guidelines.
- c) None of the exceptions under CEQA Guidelines Section 15300.2 apply to this project. The project does not involve a designated historical resource, a hazardous waste site, development located near or within view of a scenic highway, unusual circumstances that would result in a significant effect or development that would result in a cumulative significant impact. No adverse environmental effects were identified during staff review of the development application.
- d) The application, project plans, and related support materials submitted by the project applicant to Monterey County RMA-Planning for the proposed development found in Project File PLN190317.
- 8. **FINDING: APPEALABILITY** The decision on this project may be appealed to the Board of Supervisors.
 - **EVIDENCE:** a) Pursuant to Section 21.44.070, Design Approvals may be appealed to the Board of Supervisors.
 - b) <u>Board of Supervisors</u>. Pursuant to Section 21.80.050 of Title 21, an appeal may be made to the Board of Supervisors by any public agency or person aggrieved by a decision of an Appropriate Authority other than the Board of Supervisors.

DECISION

NOW, THEREFORE, based on the above findings and evidence, the Zoning Administrator does hereby:

- 1. Find that the project involves the construction of a new single family dwelling and an accessory structure, which qualifies as a Class 3 Categorical Exemption pursuant to Sections 15303(a) and 15303(e) of the CEQA Guidelines, and there are no exceptions pursuant to Section 15300.2; and
- 2. Approve a Design Approval to allow the construction of a 2,417 square foot one-story single family dwelling with a 758 square foot partial basement, an attached 505 square foot garage, and a 6 foot tall redwood fence with a Landscape Plan on a vacant lot. All described are to be in general conformance with the attached sketch and subject to the attached conditions, all being attached hereto and incorporated herein by reference.

PASSED AND ADOPTED this 9th day of January, 2020.

1	MC Mmo
Mike	Novo, Zoning Administrator

COPY OF THIS DECISION MAILED TO APPLICANT ON ____ JAN 1 0 2020_

THIS APPLICATION IS APPEALABLE TO THE BOARD OF SUPERVISORS.

IF ANYONE WISHES TO APPEAL THIS DECISION, AN APPEAL FORM MUST BE COMPLETED AND SUBMITTED TO THE CLERK TO THE BOARD ALONG WITH THE APPROPRIATE FILING FEE ON OR BEFORE JAN 2 1.2020

THIS PROJECT IS NOT LOCATED IN THE COASTAL ZONE AND IS NOT APPEALABLE TO THE COASTAL COMMISSION.

This decision, if this is the final administrative decision, is subject to judicial review pursuant to California Code of Civil Procedure Sections 1094.5 and 1094.6. Any Petition for Writ of Mandate must be filed with the Court no later than the 90th day following the date on which this decision becomes final.

This permit expires 3 years after the above date of granting thereof unless construction or use is started within this period.

Monterey County RMA Planning

Conditions of Approval/Implementation Plan/Mitigation Monitoring and Reporting Plan

PLN190317

1. PD001 - SPECIFIC USES ONLY

Responsible Department: RMA-Planning

Condition/Mitigation
Monitoring Measure:

This Design Approval permit (PLN190317) to allow the construction of a 2,417 square foot one-story single family dwelling with a 758 square foot partial basement, an attached 505 square foot garage, and 6' redwood fence on a vacant lot. 3052 Larkin Road, Pebble Beach (Assessor's located Parcel Number 007-483-006-000), Greater Monterey Peninsula Area Plan. This permit was approved in accordance with County ordinances and land use regulations subject to the terms and conditions described in the project file. Neither the uses nor the construction allowed by this permit shall commence unless and until all of the conditions of this permit are met to the satisfaction of the Director of RMA - Planning. Any use or construction not in substantial conformance with the terms and conditions of this permit is a violation of County regulations and may result in modification or revocation of this permit and subsequent legal action. No use or construction other than that specified by this permit is allowed unless additional permits are approved by the appropriate authorities. To the extent that the County has delegated any condition compliance or mitigation monitoring to the Monterey County Water Resources Agency, the Water Resources Agency shall provide all information requested by the County and the County shall bear ultimate responsibility to ensure that conditions and mitigation measures are properly fulfilled. (RMA - Planning)

Compliance or Monitoring Action to be Performed:

The Owner/Applicant shall adhere to conditions and uses specified in the permit on an ongoing basis unless otherwise stated.

2. PD002 - NOTICE PERMIT APPROVAL

Responsible Department: RMA-Planning

Condition/Mitigation Monitoring Measure: The applicant shall record a Permit Approval Notice. This notice shall state:

"A Design Approval (Resolution Number 20-003) was approved by the Zoning Administrator for Assessor's Parcel Number 007-483-006-000 on January 9, 2020. The permit was granted subject to 4 conditions of approval which run with the land. A copy of the permit is on file with Monterey County RMA - Planning."

Proof of recordation of this notice shall be furnished to the Director of RMA - Planning prior to issuance of grading and building permits, Certificates of Compliance, or commencement of use, whichever occurs first and as applicable. (RMA - Planning)

Compliance or Monitoring Action to be Performed:

PI N190317

Prior to the issuance of grading and building permits, certificates of compliance, or commencement of use, whichever occurs first and as applicable, the Owner/Applicant shall provide proof of recordation of this notice to the RMA - Planning.

Print Date: 1/9/2020 4:59:30PM Page 1 of 2

3. PD003(A) - CULTURAL RESOURCES NEGATIVE ARCHAEOLOGICAL REPORT

Responsible Department:

RMA-Planning

Condition/Mitigation Monitoring Measure:

during course of construction, cultural, archaeological, historical paleontological resources are uncovered at the site (surface or subsurface resources) work shall be halted immediately within 50 meters (165 feet) of the find until a qualified professional archaeologist can evaluate it. Monterey County RMA - Planning and a archaeologist (i.e.. an archaeologist registered with Professional Archaeologists) shall be immediately contacted by the individual present on-site. When contacted, the project planner and the archaeologist shall immediately visit the site to determine the extent of the resources and to develop proper mitigation measures required for recovery.

(RMA - Planning)

Compliance or Monitoring Action to be Performed:

The Owner/Applicant shall adhere to this condition on an on-going basis.

Prior to the issuance of grading or building permits and/or prior to the recordation of the final/parcel map, whichever occurs first, the Owner/Applicant shall include requirements of this condition as a note on all grading and building plans. The note shall state "Stop work within 50 meters (165 feet) of uncovered resource and contact Monterey County RMA - Planning and a qualified archaeologist immediately if cultural, archaeological, historical or paleontological resources are uncovered."

When contacted, the project planner and the archaeologist shall immediately visit the site to determine the extent of the resources and to develop proper mitigation measures required for the discovery.

4. PW031 - BOUNDARY SURVEY

Responsible Department:

RMA-Public Works

Condition/Mitigation Monitoring Measure:

Owner/Applicant shall have a professional land surveyor perform a boundary survey of the southerly and northerly boundary lines of the subject parcel and have said line monumented.

Compliance or Monitoring Action to be Performed:

Prior to foundation inspection, Owner/Applicant shall have a professional land surveyor survey and monument the southerly and northerly boundary lines of the subject parcel and provide evidence to the County Surveyor of conformance to the setbacks shown on the approved Site Plan. The surveyor shall be responsible for compliance with the requirements of Section 8762 of the California Business and Professions Code (PLS Act).

Print Date: 1/9/2020 4:59:30PM Page 2 of 2

GENERAL CONDITIONS

- 1. Examination of the site and portions thereof which will affect this work shall be made immediately by the contractor, who shall compare it with the drawings and satisfy himself to conditions under which work is to be performed. He shall at such time ascertain and check locations of the existing structures and equipment which may affect his work.
- 2. Contractor shall provide a complete cost breakdown and schedule of construction for this project for owner approval prior to commencement of work.
- 3. Contractor shall be responsible to obtain and all necessary permits inspections, certificates, lien releases, final inspections, etc. Contractor to coordinate payment of permits with owner.
- 4. Contractor shall protect owner's area, new and/or existing materials and finishes from damage which may occur from construction, demolition, dust, water, etc., and shall provide and maintain temporary barricades, closure walls, etc., as required to protect the public and owner during the period of construction. Damage to new and existing materials, finishes, structures, and equipment shall be repaired or replaced. Contractor shall coordinate temporary barricades with owner prior to commencement of work as necessary.
- 5. Materials that are specified by their brand names establish standards of quality and performance. any request for substitution shall be submitted to Moore Design Ilc and owner for review for equal quality and performance and shall not be purchased or installed without their written approval. All non-specified products shall conform to requirements set forth by code compliance or industry standards and contractor shall submit a list of products and manufacturers being used for review by the designer prior to purchase or installation.
- 6. All construction work, architectural, mechanical, plumbing, electrical, etc., as may be required, shall conform to the latest edition of the California Building Code/ California Residential Code and the latest edition of all governing codes and regulations as adopted by the governing jurisdiction. All work shall be done in a thorough, workmanlike manner and equal to the best standards of the practice.
- 7. All dimensions on constructions drawings are face of stud (f.o.s.), face of cmu, unless otherwise noted to be the center line of mullion, partition, or column, etc.
- 8. All dimensions take precedence over scale. Any discrepancies shall be brought immediately to the attention of Moore Design. Contractors shall not scale drawings. Questions regarding dimensions shall be brought to the designer or
- 9. All construction documents are complementary, and what is called for by any will be binding as if called for by all. Any work shown or referred to on any construction documents shall be provided as though on all related documents. Discrepancies shall be brought immediately to the attention of the designer for clarification.
- 10. All work listed, shown or implied on any construction document shall be supplied and installed by the contractor except where noted. The contractor shall closely coordinate his work with that of other contractors or vendors to assure that all schedules are met and that all work is done in conformance with manufacturer's requirements. Work required under this contract shall include all labor, materials, equipment, etc. necessary to complete this project. All materials shall be new and unused, unless specifically noted and be a quality acceptable by industry standards.
- 11. The use of the word "provide" in connection with any item specified is intended to mean that such shall be furnished, installed, and connected where so required, except as noted.
- 12. The contractor shall submit shop drawings for fabricated items, cut sheets of all fixtures and equipment, and samples of all finishes called for by the designer and owner for approval prior to construction and/or installation.
- 13. The contractor shall maintain a current and complete set of construction documents on the job site during all phases of construction for use of all trades and shall provide all subcontractors with current construction documents as required. The contractor, in assuming responsibility for the work indicated, shall comply with the spirit as well as with the letter in which they were drawn.
- 14. The contractor shall remove all rubbish and waste materials of all subcontractors and trades on a regular basis, and shall exercise strict control over job cleaning to prevent any dirt, debris or dust from affecting, in any way, finished
- 15. The construction documents are provided to illustrate the design and general type of construction desired and imply the finest quality of construction, material and workmanship throughout.
- 16. All electrical, mechanical, and plumbing work and materials shall be in full accordance with the latest rules and regulations of the national board of fire underwriters, the state fire marshall, the safety orders of the division of industrial safety, and any applicable state or local laws and ordinances. Nothing on these drawings is to be construed to permit work not conforming to these codes.
- 17. Work which is obviously required to be performed in order to provide a completely operable installation within the limits and scope of work, but which may not be specifically included in the plans, shall be performed by contractor and included in his bid.
- 18. All work shall be guaranteed against defects in design, installation and material for a minimum period of one year from date of completion.

N.T.S.


NOT TO SCALE

W.LC.

WALK IN CLOSET

- 19. Contractor shall personally supervise and direct the work or shall keep a competent employee, authorized to receive instructions and act on the contractor's behalf, continuously on site during working hours.
- 20. Trees adjacent to structures and over driveways shall be trimmed to clear structures and provide 15' clearance over drives. Protect other trees during construction (see forest mgt. plan). No tree shall be removed unless called for in the plans and a permit is first issued by the local jurisdiction.

			ABBR	EVIATI	ONS AND SYMBOLS		
APPROX. BLK. CLO. CONC. CONT.	APPROXIMATE BLOCK CLOSET CONCRETE CONTINUOUS	O.C. O.D. PLYWD REF R.O.	ON CENTER OUTSIDE DIAMETER PLYWOOD REFRIGERATOR ROUGH OPENING	(1) (A)	WALL LINE NUMBERS VERTICAL LETTERS HORIZONTAL	\Diamond	SECTION SECTION IDENTIFICATION SHEET WHERE SECTION IS DRAWN
DS DW (E)	DOWNSPOUT DISHWASHER EXISTING	SHWR SIM SL	SHOWER SIMILAR SKYLIGHT		DOORS SYMBOL NUMBERS		ELEVATION ELEVATION IDENTIFICATION
F.O.C. F.O.S.	FACE OF CONCRETE FACE OF STUD	T&G T.O.P.	TONGUE AND GROOVE TOP OF PLATE	$\langle 1 \rangle$	WINDOW TYPE-NUMBERS		SHEET WHERE ELEVATION IS DRAWN
GALV. GYP. G.W.B.	GALVANIZED GYPSUM GYPSUM WALLBOARD	TYP. U.O.N. NOTED	TYPICAL UNLESS OTHERWISE	\bigcirc	DETAIL NUMBER_ SHEET WHERE DETAIL IS LOCATED	\triangle (REVISIONS-NUMBERS CLOUD AROUND REVISION OPTIONAL
FLR HDWD N.I.C.	FLOOR HARDWOOD NOT IN CONTRACT	WP W/ W/O	WATERPROOF WITH WITHOUT	1	SHEET NOTE	+8'-0"	CEILING HEIGHT

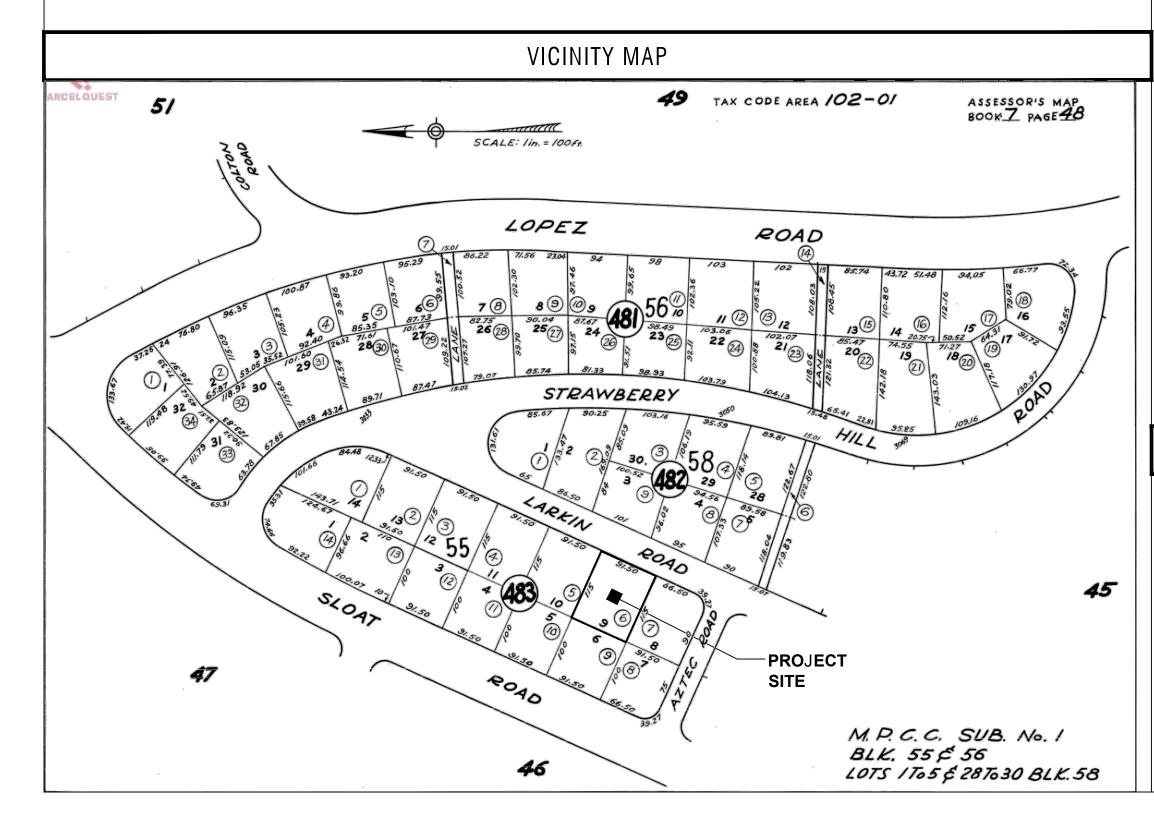



		OWNER:
COVER SHEET		
SITE PLAN		

C1	COVER SHEET
C2	TOPOGRAPHIC MAP/ EXISTING CONDITIONS
C3	GRADING AND DRAINAGE PLAN
C4	GRADING SECTIONS
C5	CONSTRUCTION DETAILS
C6	EROSION CONTROL PLAN
C7	CONSTRUCTION MANAGEMENT PLAN
A2.1	MAIN FLOOR PLAN
A2.2	LOWER FLOOR PLAN
A2.3	ROOF PLAN & SECTIONS
A4.1	EXTERIOR ELEVATIONS

SHEET INDEX

ARCHITECTURAL

CAL GREEN NOTES

- Irrigation Controllers- Automatic irrigation controllers installed at the time of final inspection shall be weathered-based.
- 2. Rodent Proofing- Protect annular spaces around pipes, electrical cables, conduits or other openings at exterior walls
- against passage of rodents. CGBC 4.406.1 3. Construction Waste Management- Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with the CGBC Sec. 4.408.1

EXTERIOR ELEVATIONS

- Covering of Mechanical Equipment & Ducts- Cover duct openings and other air related air distribution component openings during storage, construction and until final start up with tape, plastic, or other acceptable method. CGBC 4.504.1
- Adhesives, sealants and caulks- Adhesives, sealants and caulks used on the project shall be compliant with VOC and
- other toxic compound limits. CGBC 4.504.2.1 Paint and Coatings- Paint, stains and other coatings used on the project shall be compliant with VOC limits. CGBC
- Aerosol paints and coatings- Aerosol paints and coatings used on the project shall be compliant with product weighted

MIR limits for ROC and other toxic compounds. Documentation shall be provided to verify compliant VOC limit finish

- materials have been used. CGBC 4.504.2.3. Verification of compliance shall be provided. Carpet Systems- All carpet and carpet systems installed shall be compliant with VOC limits. CGBC 4.504.3 Resilient Floor Systems- 80% of the floor area receiving resilient floorings shall comply with the VOC emission limits defined in the Collaborative for High Performance Schools (CHPS) low-emitting materials list or be certified under the
- Resilient Floor Covering Institute (RFCI) FloorScore program. CGBC 4.504.4 10. Composite Wood Products- Particleboard, Medium density fiberboard (MDF) and hardwood plywood used in interior
- finish systems shall comply with low formaldehyde emission standards. CGBC 4.504.5 11. Foundation: Capillary Break- A 4" thick of 1/2" or larger clean aggregate shall be installed with a vapor retarder in direct
- contact with concrete. CGBC 4.505.2.1 12. Moisture Content of Building Materials- Building materials with visible signs of water damage shall not be installed.
- Wall and floor framing shall not be enclosed when the framing members exceed 19% moisture content. CGBC 4.505.3 13. Bathroom Exhaust Fans- Each bathroom shall be mechanically ventilated with an Energy Star exhaust fan and the fan must be controlled by a humidstat capable of adjustment between a relative humidity range of < 50% to a maximum of
- 80%. CGBC 4.506.1 14. Heating and Air-Conditioning System Design-HVAC systems shall be sized, designed and their equipment sized per CGBC 4.507.2. HVAC system installer must be trained and certified and special inspectors employed by the enforcing agency must be qualified.

PLANNING CONDITIONS

	443 SAINT MARY STREET PLEASANTON, CA 94566 480-216-6965
DESIGNER:	MOORE DESIGN, LLC CONTACT: JOHN MOORE 225 CANNERY ROW, SUITE i MONTEREY, CA. 93940 OFFICE (831) 642-9732 CELL (831) 239-6868 EMAIL: john@mooredesign.org
GENERAL CONTRACTOR:	T.B.D.
GEOTECHNICAL ENGINEER:	LANDSET ENGINEERS, INC. CONTACT: BRIAN PAPURELLO 520 CRAZY HORSE RD. SALINAS, CA 93907 TEL (831) 443-6970 FAX (831) 443-3801 EMAIL: bpapurello@landseteng.com
STRUCTURAL ENGINEER:	STRUCTURES INC. CONTACT: WILLIAM COKER 1676 FREMONT BLVD, SUITE G SEASIDE, CA 93955 OFFICE (831) 393-4460 email: wcoker@structuresenginc.com LIC # C 82497
SURVEYOR / CIVIL:	LANDSET ENGINEERS, INC. CONTACT: BRIAN PAPURELLO 520 CRAZY HORSE RD. SALINAS, CA 93907 TEL (831) 443-6970 FAX (831) 443-3801 EMAIL: BPAPURELLO@LANDSETENG.COM
TITLE 24 CONSULTANT:	MONTEREY ENERGY GROUP CONTACT: DAVID KNIGHT 227 FOREST AVE., SUITE 5 PACIFIC GROVE, CA. 93950 TEL (831) 372-8328 FAX (831) 372-4613 FMAIL: cad@meg4.com

PROJECT DIRECTORY

CHIP & GINA LARSON

	225 CANNERY ROW, SUITE i MONTEREY, CA. 93940 OFFICE (831) 642-9732 CELL (831) 239-6868 EMAIL: john@mooredesign.org	
:	T.B.D.	
ER:	LANDSET ENGINEERS, INC. CONTACT: BRIAN PAPURELLO 520 CRAZY HORSE RD. SALINAS, CA 93907 TEL (831) 443-6970 FAX (831) 443-3801 EMAIL: bpapurello@landseteng.com	
₹:	STRUCTURES INC. CONTACT: WILLIAM COKER 1676 FREMONT BLVD, SUITE G SEASIDE, CA 93955 OFFICE (831) 393-4460 email: wcoker@structuresenginc.com LIC # C 82497	
	LANDSET ENGINEERS, INC. CONTACT: BRIAN PAPURELLO 520 CRAZY HORSE RD. SALINAS, CA 93907 TEL (831) 443-6970 FAX (831) 443-3801 EMAIL: BPAPURELLO@LANDSETENG.COM	
	MONTEREY ENERGY GROUP CONTACT: DAVID KNIGHT 227 FOREST AVE., SUITE 5 PACIFIC GROVE, CA. 93950 TEL (831) 372-8328 FAX (831) 372-4613 EMAIL: cad@meg4.com	

BUILDING DEPARTMENT NOTES

PD003(A) - CULTURAL RESOURCES NEGATIVE ARCHAEOLOGICAL REPORT

If, during the course of construction, cultural, archaeological, historical or paleontological resources are uncovered at the site (surface or subsurface resources) work shall be halted immediately within 50 meters (165 feet) of the find until a qualified professional archaeologist can evaluate it. Monterey County RMA - planning and a qualified archaeologist (i.e., an archaeologist registered with the register of professional archaeologists) shall be immediately contacted by the responsible individual present on-site. When contacted, the project planner and the archaeologist shall immediately visit the site to determine the extent of the resources and to develop proper mitigation measures required for recovery.

PD014(A) - LIGHTING - EXTERIOR LIGHTING PLAN

All exterior lighting shall be unobtrusive, down-lit, harmonious with the local area, and constructed or located so that only the intended area is illuminated and off-site glare is fully controlled. The lighting source shall be shielded and recessed into the fixture. The applicant shall submit three (3) copies of an exterior lighting plan which shall indicate the location, type, and wattage of all light fixtures and include catalog sheets for each fixture. The lighting shall comply with the requirements of the California Energy Code set forth in California Code of Regulations Title 24 part 6. The exterior lighting plan shall be subject to approval by the director of RMA - Planning, prior to the issuance of building permits. (RMA - PLANNING)

- No person may tap into any fire hydrant other than fire suppression or emergency aid, without first obtaining written approval from the water purveyor supplying water to the hydrant and from the monterey county health department.
- All hoses used in connection with any construction activities shall be equipped with a nozzle shut-off. when an automatic shut-off nozzle can be purchased or otherwise obtained for the size or type of hose in use, the nozzle shall be an automatic
- 3. No potable water may be used for compaction or dust control purposes in construction activities where there is a reasonably available source of reclaimed or other sub-potable water approved by the monterey county health department and appropriate
- 4. The use of solders containing more than 2/10ths of 1% lead in making joints on private or public water supply systems is prohibited (SB 164).
- 5. Provide non-removable backflow devices at all hosebibs.

PROJECT INFORMATION


	PROJECT ADDRESS:	3052 LARKIN ROAD PEBBLE BEACH, CA 93953
	A.P.N.	007-483-006-000
	PROJECT SCOPE:	NEW SINGLE FAMILY DWELLING (3,174 SF) WITH ATTACHED 2-CAR GARAGE (505 SF)
	PROJECT VALUATION:	\$600,000
	RELATED PERMIT	NONE
	PROJECT CODE COMPLIANCE:	2016 - Title 24, California Residential Code (CRC), California Building Code (CBC), California Mechanical Code (CMC), California Plumbing Code (CPC), California Electrical Code (CEC California Energy Code (CEnC), California Green Building Standards Code (CALGREEN), California Fire Code (CFC), Monterey Co. Code Local Amendments
	ZONE:	MDR/B-6-RES
	YEAR CONSTRUCTED:	NEW CONSTRUCTION
	MAX BLDG. HT:	18'-3" (27'-0" ALLOWED)
	CONSTR. TYPE:	TYPE V-B
	OCCUPANCY:	R-3 (RESIDENTIAL), U
	FIRE SPRINKLERS	REQUIRED NFPA-13D
	WATER SYSTEM:	PRIVATE WELL
	SEWER SYSTEM:	PBCSD
	TREE REMOVAL:	NONE
	TOPOGRAPHY:	GENTLY SLOPING, LESS THAN 15%
	GRADING:	190 C.Y. CUT, 165 C.Y. FILL
	AREA OF DISTURBANCE:	4,435 SF
	LOT SIZE:	10,522 SF
	LOT COVERAGE CALCS:	
	ALLOWED	35% = 3,683 SF
	PROPOSED	3,591 SF
•	FLOOR AREA CALCS:	
	ALLOWED	35% = 3,683 SF
	MAIN FLOOR	2,422 SF
	LOWER FLOOR	752 SF
	TOTAL HABITABLE	3,174 SF
	GARAGE	505 SF
	NEW COMBINED TOTAL	3,679 SF
	ALLOWED	3,683 SF

PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



MONTEREY CA. 93940 831.642.9732 FAX 831.401.3292 john@mooredesign.org

225 CANNERY ROW, SUITE i

DRAWING REC	ORD
DESCRIPTION	ISSUED
PEBBLE BEACH SUBMITTAL	9-11-201
COUNTY PLN SUBMITTAL	9-19-19

10/9/2019



BUILDING DESIGN

All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the


Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale

acceptance of the restrictions.

SHEET TITLE:

COVER SHEET / PROJECT INFO

SHEET NUMBER:

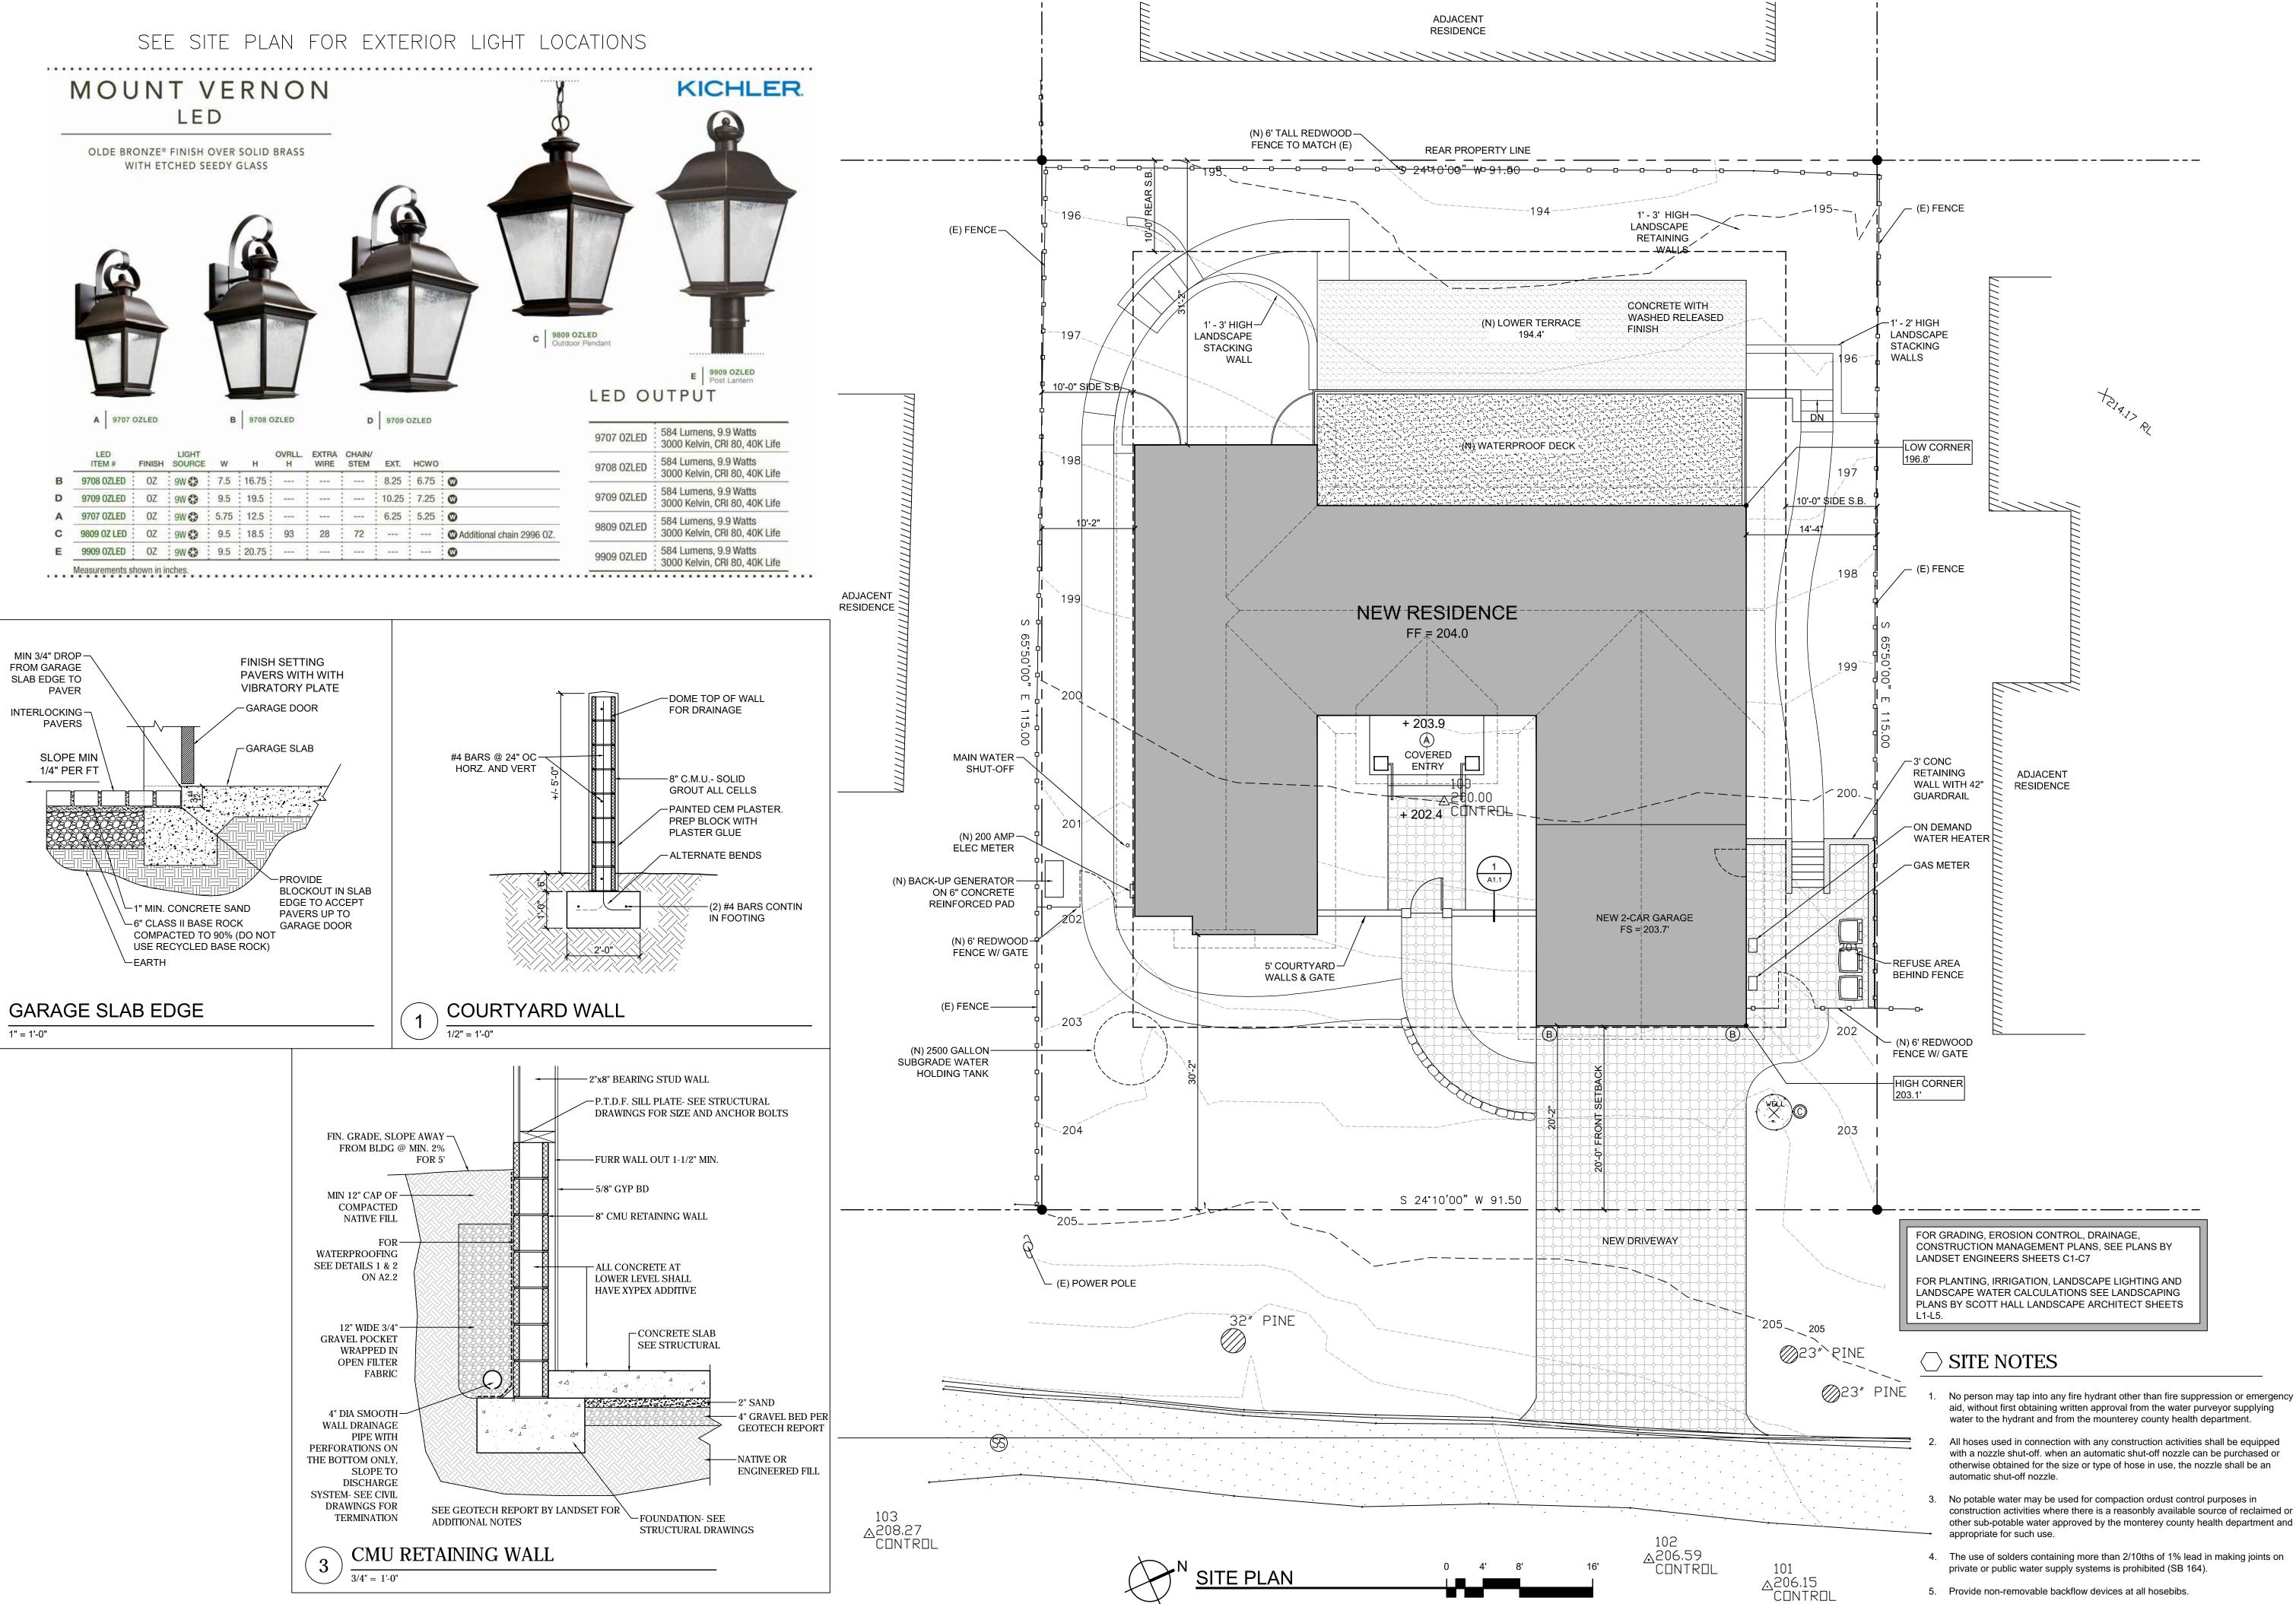

SCALE: 1/8" = 1'-0"

PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



CONSTRUCTION ADMINISTRATION
225 CANNERY ROW, SUITE i

225 CANNERY ROW, SUITE i MONTEREY CA. 93940 831.642.9732 FAX 831.401.3292 john@mooredesign.org

DRAWING RECORD		
DESCRIPTION	ISSUED	
PEBBLE BEACH SUBMITTAL	9-11-2019	
COUNTY PLN SUBMITTAL	9-19-19	
COUNTY BLDG SUBMITTAL	11-15-19	

PRINT DATE: 11/14/2019

MEMBER
A
B
B
B
R

AMERICAN INSTITUTE of
BUILDING DESIGN

All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the acceptance of the restrictions.

Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale

SHEET TITLE:

SITE PLAN

SHEET NUMBER:

6. Slope all grades away from the structure for a min 5% for 10'-0".

system shall be protected with an approved sewer relief valve.

7. Contractor is to verify the location and height of the nearest upstream manhole cover. If the flood level rims are less then 2' above this elevation, the sewer


A1.1

GRADING, DRAINAGE & EROSION CONTROL PLAN

THE LARSON RESIDENCE

APN: 007-483-006

PEBBLE BEACH, MONTEREY COUNTY, CALIFORNIA

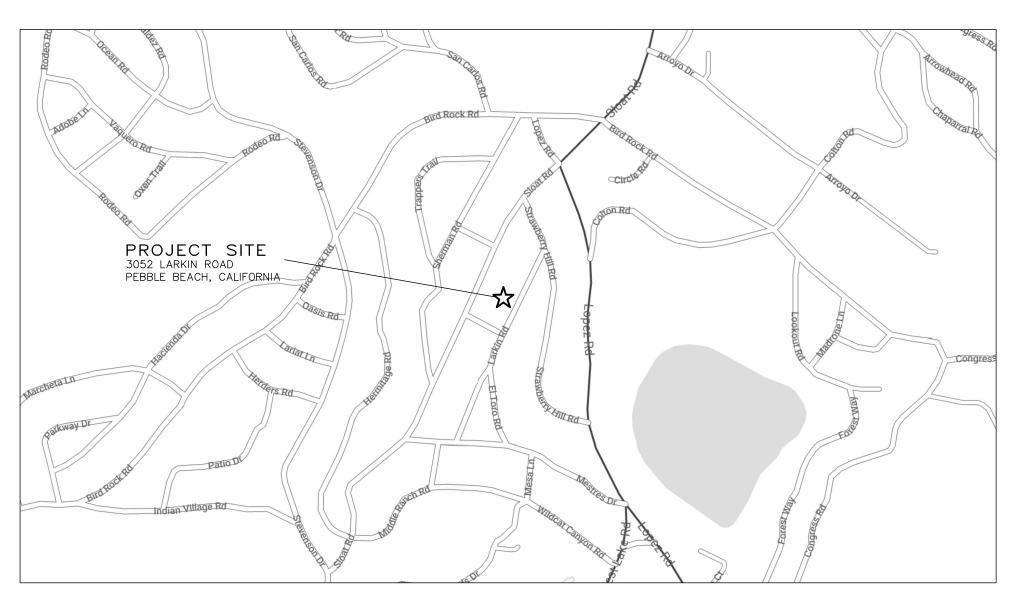

VICINITY MAP


GENERAL NOTES:

PROJECT DESIGN BASED ON INFORMATION PROVIDED AND SHOWN ON THE SITE PLAN FOR THE LARSON RESIDENCE, SHEET A1.0 PREPARED BY MOORE DESIGN LLC & THE BASE TOPOGRAPHIC INFORMATION PREPARED BY LANDSET ENGINEERS INC., JOB NO. 1971-01, DATED JUNE 2019.

-) NOT ALL UNDERGROUND UTILITIES WERE LOCATED. ONLY VISIBLE FACILITIES ABOVE AND FLUSH WITH THE SURFACE ARE SHOWN. SUB-SURFACE UTILITY LINES DRAWN MAY NOT BE COMPLETE AND SHOULD BE VERIFIED BY FIELD RECONNAISSANCE. UNDERGROUND UTILITY LOCATIONS CAN BE OBTAINED FROM THE APPROPRIATE UTILITY COMPANIES, PUBLIC AGENCIES, OWNER'S AS-BUILT DRAWINGS, ETC., AND SHOULD BE THOROUGHLY COMPILED AND DEEMED COMPLETE WITH THE PROJECT AREA, PRIOR TO ANY SITE DEVELOPMENT DESIGN AND/OR
- 3) THIS MAP PORTRAYS THE SITE AT THE TIME OF THE SURVEY AND DOES NOT SHOW SOILS OR GEOLOGY INFORMATION, UNDERGROUND CONDITIONS, EASEMENTS, ZONING OR REGULATORY OR ANY OTHER ITEMS NOT SPECIFICALLY REQUESTED BY THE PROPERTY OWNER.
- 4) THIS MAP DOES NOT REPRESENT A BOUNDARY SURVEY.

GRADING & DRAINAGE NOTES:

- 1) ALL GRADING SHALL CONFORM TO THE LATEST MONTEREY COUNTY GRADING ORDINANCE AND EROSION CONTROL ORDINANCE, THE RECOMMENDATIONS FOUND IN THE PROJECT SOIL'S ENGINEERING INVESTIGATION PREPARED BY LANDSET ENGINEERS INC., DATED AUGUST, 2019, THE LATEST VERSION OF THE CALTRANS SPECIFICATIONS, THE GOVERNING PUBLIC AGENCIES, THE LATEST REVISION OF THE CALIFORNIA BUILDING CODE (CBC) AND THESE PLANS.
- 2) SURFACE ORGANICS SHALL BE STRIPPED AND STOCKPILED FOR LATER USE AS TOPSOIL MATERIAL ACTUAL GRADING SHALL BEGIN WITHIN 30 DAYS OF VEGETATION REMOVAL OR THE AREA SHALL BE PLANTED TO CONTROL EROSION.
- 3) NO ORGANIC MATERIAL SHALL BE PERMITTED IN FILLS EXCEPT AS TOPSOIL USED FOR SURFACE PLANT GROWTH ONLY AND WHICH DOES NOT EXCEED 4" IN DEPTH.
- 4) THERE ARE APPROXIMATELY 190 C.Y. OF CUT AND 165 C.Y. OF FILL TOTAL WITH A NET EXCESS OF 25 YARDS. EXCAVATION SHALL BE USED FOR EMBANKMENT CONSTRUCTION, LANDSCAPE PURPOSES AND/OR HAULED OFF-SITE. ADDITIONAL ON-SITE SPOILS GENERATED FROM FOUNDATIONS, UTILITY TRENCHES, SEPTIC CONSTRUCTION, ETC. IS NOT INCLUDED IN THE ABOVE REFERENCED QUANTITIES. IMPORT MATERIAL SHALL MEET THE REQUIREMENTS OF SELECT STRUCTURAL FILL AS NOTED IN THE SOIL'S REPORT AND BE APPROVED BY THE SOILS ENGINEER PRIOR TO
- 5) EMBANKMENT MATERIAL SHALL BE PLACED IN 8" LOOSE LIFTS, MOISTURE CONDITIONED, AND COMPACTED TO 90% MIN. REL. COMPACTION. ALL BASEROCK AND THE UPPER 12" OF SUBGRADE SHALL BE COMPACTED TO 95% MIN.
- 6) ALL CUT AND FILL SLOPES SHALL BE 2:1 OR FLATTER. STEEPER SLOPES MAY BE ALLOWED ONLY WITH THE PERMISSION OF THE SOILS ENGINEER.
- 7) PAD ELEVATIONS SHALL BE CERTIFIED TO 0.10', PRIOR TO DIGGING ANY FOOTINGS OR SCHEDULING ANY
- 8) DUST FROM GRADING OPERATIONS MUST BE CONTROLLED. CONTRACTOR SHALL PROVIDE ADEQUATE WATER TO CONTROL DUST DURING AND FOR GRADING OPERATIONS.
- 9) A COPY OF ALL COMPACTION TESTS AND FINAL GRADING REPORT SHALL BE SUBMITTED TO THE COUNTY OF MONTEREY PLANNING AND BUILDING INSPECTION DEPARTMENT AT SCHEDULED INSPECTIONS.
- 10) THE GROUND IMMEDIATELY ADJACENT TO FOUNDATIONS SHALL BE SLOPED AWAY FROM THE BUILDING AT 5% FOR A MINIMUM DISTANCE OF 10 FEET. IF PHYSICAL OBSTRUCTIONS OR LOT LINES PROHIBIT 10 FOOT OF HORIZONTAL DISTANCE, A 5% SLOPE SHALL BE PROVIDED TO AN APPROVED ALTERNATIVE METHOD OF DIVERTING WATER AWAY FROM THE FOUNDATION. SWALES USED FOR THIS PURPOSE SHALL BE SLOPED AT A MINIMUM OF 2% WHERE LOCATED WITHIN 5 FEET OF THE BUILDING FOUNDATION. IMPERVIOUS SURFACES WITHIN 10 FEET OF THE BUILDING FOUNDATION SHALL BE SLOPED AT A MINIMUM OF 2% AWAY FROM THE BUILDING.
- 11) ROOF DRAINAGE SHALL BE CONTROLLED BY GUTTER AND DOWN SPOUTS WITH SPLASH BLOCKS AND DIRECTED INTO SWALES AND THE SITE STORM DRAIN SYSTEM.
- 12) STORM WATER (SURFACE RUNOFF) SHALL BE COLLECTED BY SWALES, CATCH BASINS, AND PIPES INTO INFILTRATION CHAMBERS AS SHOWN ON THE SITE DRAINAGE PLAN. ON SITE CATCH BASINS SHALL BE CHRISTY PRODUCTS V12. STORM DRAIN PIPE SHALL BE PVC SDR35
- 13) UTILITY TRENCHES WITHIN THE BUILDING PAD OR ANY NEW PAVED AREAS SHALL BE BACKFILLED WITH CLEAN, IMPORTED SAND AND THE TRENCH BACKFILL SHALL BE COMPACTED TO 95% MIN. REL. COMPACTION. THE TOP 8" OF TRENCH SHALL BE CAPPED WITH NATIVE SOIL. IN NON—PAVED AREAS NATIVE BACKFILL SHALL BE USED AND COMPACTED TO 90% MIN. REL. COMPACTION.
- 14) ALL WORK IS SUBJECT TO APPROVAL BY THE PUBLIC WORKS SUPERINTENDENT INSPECTION AND ACCEPTANCE.
- 15) SPECIAL INSPECTIONS, BY A SPECIAL INSPECTOR, ARE REQUIRED DURING FILL PLACEMENT AND THAT PROPER MATERIALS AND PROCEDURES ARE USED IN ACCORDANCE WITH THE PROVISIONS OF THE APPROVED GEOTECHNICAL
- 16) THE LOCATION, HEIGHT AND THE PLATE HEIGHTS OF THE NEW STRUCTURE MUST BE CERTIFIED BY A SURVEYOR TO BE IN CONFORMANCE WITH THE APPROVED PLANS.
- 17) STOP WORK WITHIN 50 METERS (165 FEET) OF UNCOVERED RESOURCE AND CONTACT THE MONTEREY COUNTY RMA - PLANNING DEPARTMENT AND A QUALIFIED ARCHAEOLOGIST IMMEDIATELY IF CULTURAL, ARCHAEOLOGICAL, HISTORICAL, OR PALEONTOLOGICAL RESOURCES ARE UNCOVERED.

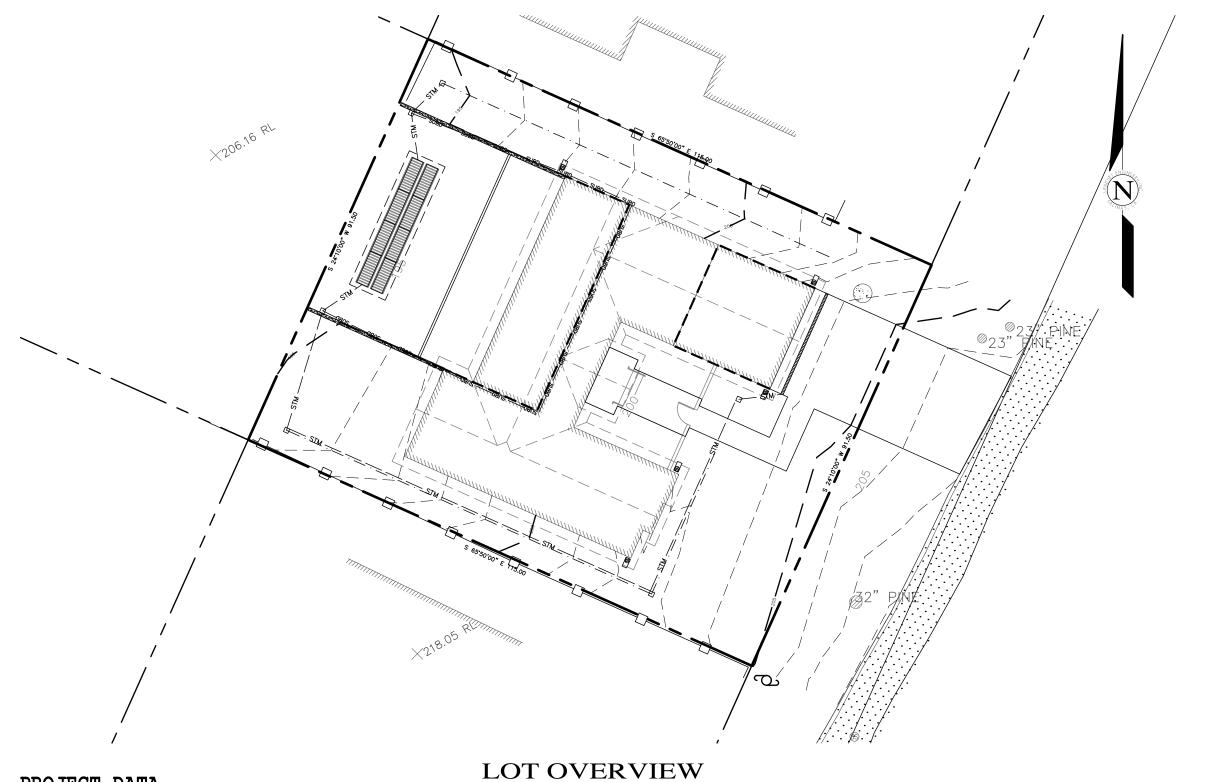

PROJECT DATA 25 Cu. Ya. Cut

EROSION & SEDIMENT CONTROL NOTES:

- 1) ALL EROSION CONTROL MEASURES SHALL CONFORM WITH THE COUNTY OF MONTEREY EROSION CONTROL ORDINANCE.
- 2) EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IN EFFECT FOR ANY CONSTRUCTION DURING THE RAINY SEASON. APPROX. OCTOBER 15 TO APRIL 15. EROSION CONTROL PLAN SHALL BE PREPARED AND SUBMITTED FOR APPROVAL BY SEPT. 15 OF ANY OR EACH CALENDAR YEAR THAT CONSTRUCTION MAY EXTEND BEYOND OCTOBER 15.

*CREATED AND/OR REPLACED

- 3) ALL SLOPES SHALL BE PROTECTED WITH STRAW MULCH OR SIMILAR MEASURES TO PROTECT AGAINST EROSION UNTIL SUCH SLOPES ARE PERMANENTLY STABILIZED.
- 4) RUNOFF SHALL BE DETAINED OR FILTERED BY BERMS, VEGETATED FILTER STRIPS, AND/OR CATCH BASINS TO PREVENT THE ESCAPE OF SEDIMENT FROM THE SITE.
- 5) EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IN PLACE AT THE END OF EACH DAY'S WORK.
- 6) EROSION CONTROL PLANTINGS AND MULCH SHALL BE CLOSELY MONITORED THROUGHOUT THE WINTER AND ANY RUNOFF PROBLEMS CORRECTED PROMPTLY. SEE LANDSCAPE ARCHITECT'S PLAN FOR PERMANENT PLANTINGS AND TREE SCHEDULES.
- 7) DISTURBED SURFACES NOT INVOLVED IN THE IMMEDIATE GRADING OPERATIONS MUST BE PROTECTED BY MULCHING AND/OR OTHER
- EFFECTIVE MEANS OF SOIL PROTECTION.
- 8) ALL ROADS AND DRIVEWAYS SHALL HAVE DRAINAGE FACILITIES SUFFICIENT TO PREVENT EROSION ON OR ADJACENT TO THE ROADWAY OR ON THE DOWNHILL PROPERTIES.

9) DRAINAGE CONTROL MEASURES SHALL BE MAINTAINED AND IN PLACE AT THE END OF EACH DAY AND CONTINUOUSLY THROUGHOUT THE

LIFE OF THE PROJECT DURING WINTER OPERATIONS. 10) REVEGETATION SHALL CONSIST OF A MECHANICALLY APPLIED HYDROMULCH SLURRY OR HAND SEEDED WITH A STRAW MULCH COVER. MULCH SHALL BE ANCHORED BY AN APPROVED METHOD SUCH AS PUNCHING, TACKING, OR THE USE OF JUTE NETTING, AS DEEMED

NECESSARY FOR THE SITE CONDITIONS TO ALLOW FOR GERMINATION AND ENABLE ADEQUATE GROWTH TO BE ESTABLISHED.

SLIPPAGE OF THE NEWLY EXPOSED AREAS SHALL BE REPAIRED BY THE PERMITTEE AT THEIR EXPENSE.

- 11) CHECK DAMS, SILT FENCES, FIBER ROLLS OR OTHER DESIGNS SHALL BE INCORPORATED TO CATCH ANY SEDIMENT UNTIL AFTER THE NEWLY EXPOSED AREAS ARE REVEGETATED SUFFICIENTLY TO CONTROL EROSION. EROSION CONTROL PLANTINGS AND MULCH SHALL BE CLOSELY MONITORED THROUGHOUT THE WINTER AND ANY RUNOFF PROBLEMS SHALL BE CORRECTED PROMPTLY. ALL EROSION AND/OR
- 12) THE GRASS SEED SHALL BE PROPERLY IRRIGATED UNTIL ADEQUATE GROWTH IS ESTABLISHED AND MAINTAINED TO PROTECT THE SITE FROM FUTURE EROSION DAMAGE. ALL NEWLY EXPOSED (DISTURBED) AREAS SHALL BE SEEDED WITH THE FOLLOWING EROSION CONTROL MIX: BROMUS CARINATUS (CALIFORNIA BROME), VULPIA MICROSTACHYS (NUTTALL'S FESCUE), ELYMUS GLAUCUS (BLUE WILD RYE), HORDEUM BRACHYANTHERUM (MEADOW BARLEY), FESTUCA RUNRA'MOLATE BLUE AND A MIXTURE OF LOCALLY NATIVE WILDFLOWERS.
- 13) THE DIRECTOR OF BUILDING INSPECTION (BUILDING OFFICIAL) SHALL STOP OPERATIONS DURING PERIODS OF INCLEMENT WEATHER IF HE OR SHE DETERMINES THAT EROSION PROBLEMS ARE NOT BEING CONTROLLED ADEQUATELY.
- 14) GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR EROSION AND SEDIMENT CONTROL BMP INSTALLATION AND MAINTENANCE AND SHALL PROVIDE FULL PARTICULARS TO COUNTY RMA-ENVIRONMENTAL SERVICES PRIOR TO BEG. WORK.

LEGEND:

EXISTING (N):

- MAJOR CONTOUR LINE (5' INTERVAL, MINOR CONTOUR LINE (1' INTERVAL) ASPHALT PAVEMENT SURFACE WOOD SURFACE

NEW (N):

- MAJOR CONTOUR LINE (5' INTERVAL) - MINOR CONTOUR LINE (1' INTERVAL) --- STM --- -- STORM DRAIN LINE — SUBD—— SUBD—— SUBD—— SUB DRAIN LINE REE TO BE REMOVED ROOF DOWNSPOUT WITH SPLASHBLOCK MAIN FLOOR HOUSE FOOTPRINT

ASPHALT PAVEMENT SURFACE

INDEX TO SHEETS

SHEET C1 COVER SHEET SHEET C2 TOPOGRAPHIC MAP/EXISTING CONDITIONS SHEET C3 GRADING & DRAINAGE PLAN SHEET C4 GRADING SECTIONS SHEET C5 CONSTRUCTION DETAILS SHEET C6 EROSION & SOURCE CONTROL PLAN SHEET C7 CONSTRUCTION MANAGEMENT PLAN

NOTE: PRIOR TO FINAL INSPECTION, THE OWNER/APPLICANT SHALL PROVIDE CERTIFICATION FROM THE PROJECT GEOTECHNICAL ENGINEER THAT ALL DEVELOPMENT HAS BEEN CONSTRUCTED IN ACCORDANCE WITH THE RECOMMENDATIONS IN THE PROJECT SOIL ENGINEERING INVESTIGATION.

GEOTECHNICAL INSPECTION SCHEDULE

Inspection item:	Who will conduct the inspection:	When the Inspection is to be completed:	Inspection completed by:	Date completed:
Site stripping and clearing	LANDSET ENGINEERS	Beginning of Project		
Subexcavation, fill placement, and compaction	LANDSET ENGINEERS	Throughout grading operations		
Foundation Excavations	LANDSET ENGINEERS	Prior to placement of forms and reinforcing steel		
Surface and subsurface drainage improvements	LANDSET ENGINEERS	Prior to trench backfill		
Utility trench compaction	LANDSET ENGINEERS	During backfill operations		
Retaining wall backfill compaction	LANDSET ENGINEERS	During backfill operations		
Baserock subgrade compaction	LANDSET ENGINEERS	Prior to pavement installation		

CONTACT INFORMATION:

MR. & MRS. CHIP & GINA LARSON 4318 1ST STREET PLEASANTON, CA 94566 ARCHITECT: ATTN:JOHN MOORE MOORE DESIGN LLC 225 CANNERY ROW, SUITE I

SITE LOCATION: 3052 LARKIN ROAD PEBBLE BEACH, CA

o. DATE BY

MONTEREY, CA 93940

09/23/19 JK | RELEASED TO CLIENT


REVISION


SION

SCALE: 1" = 16"DATE: SEPT 2019 IOB NO. 1971-02

OF 7 SHEETS




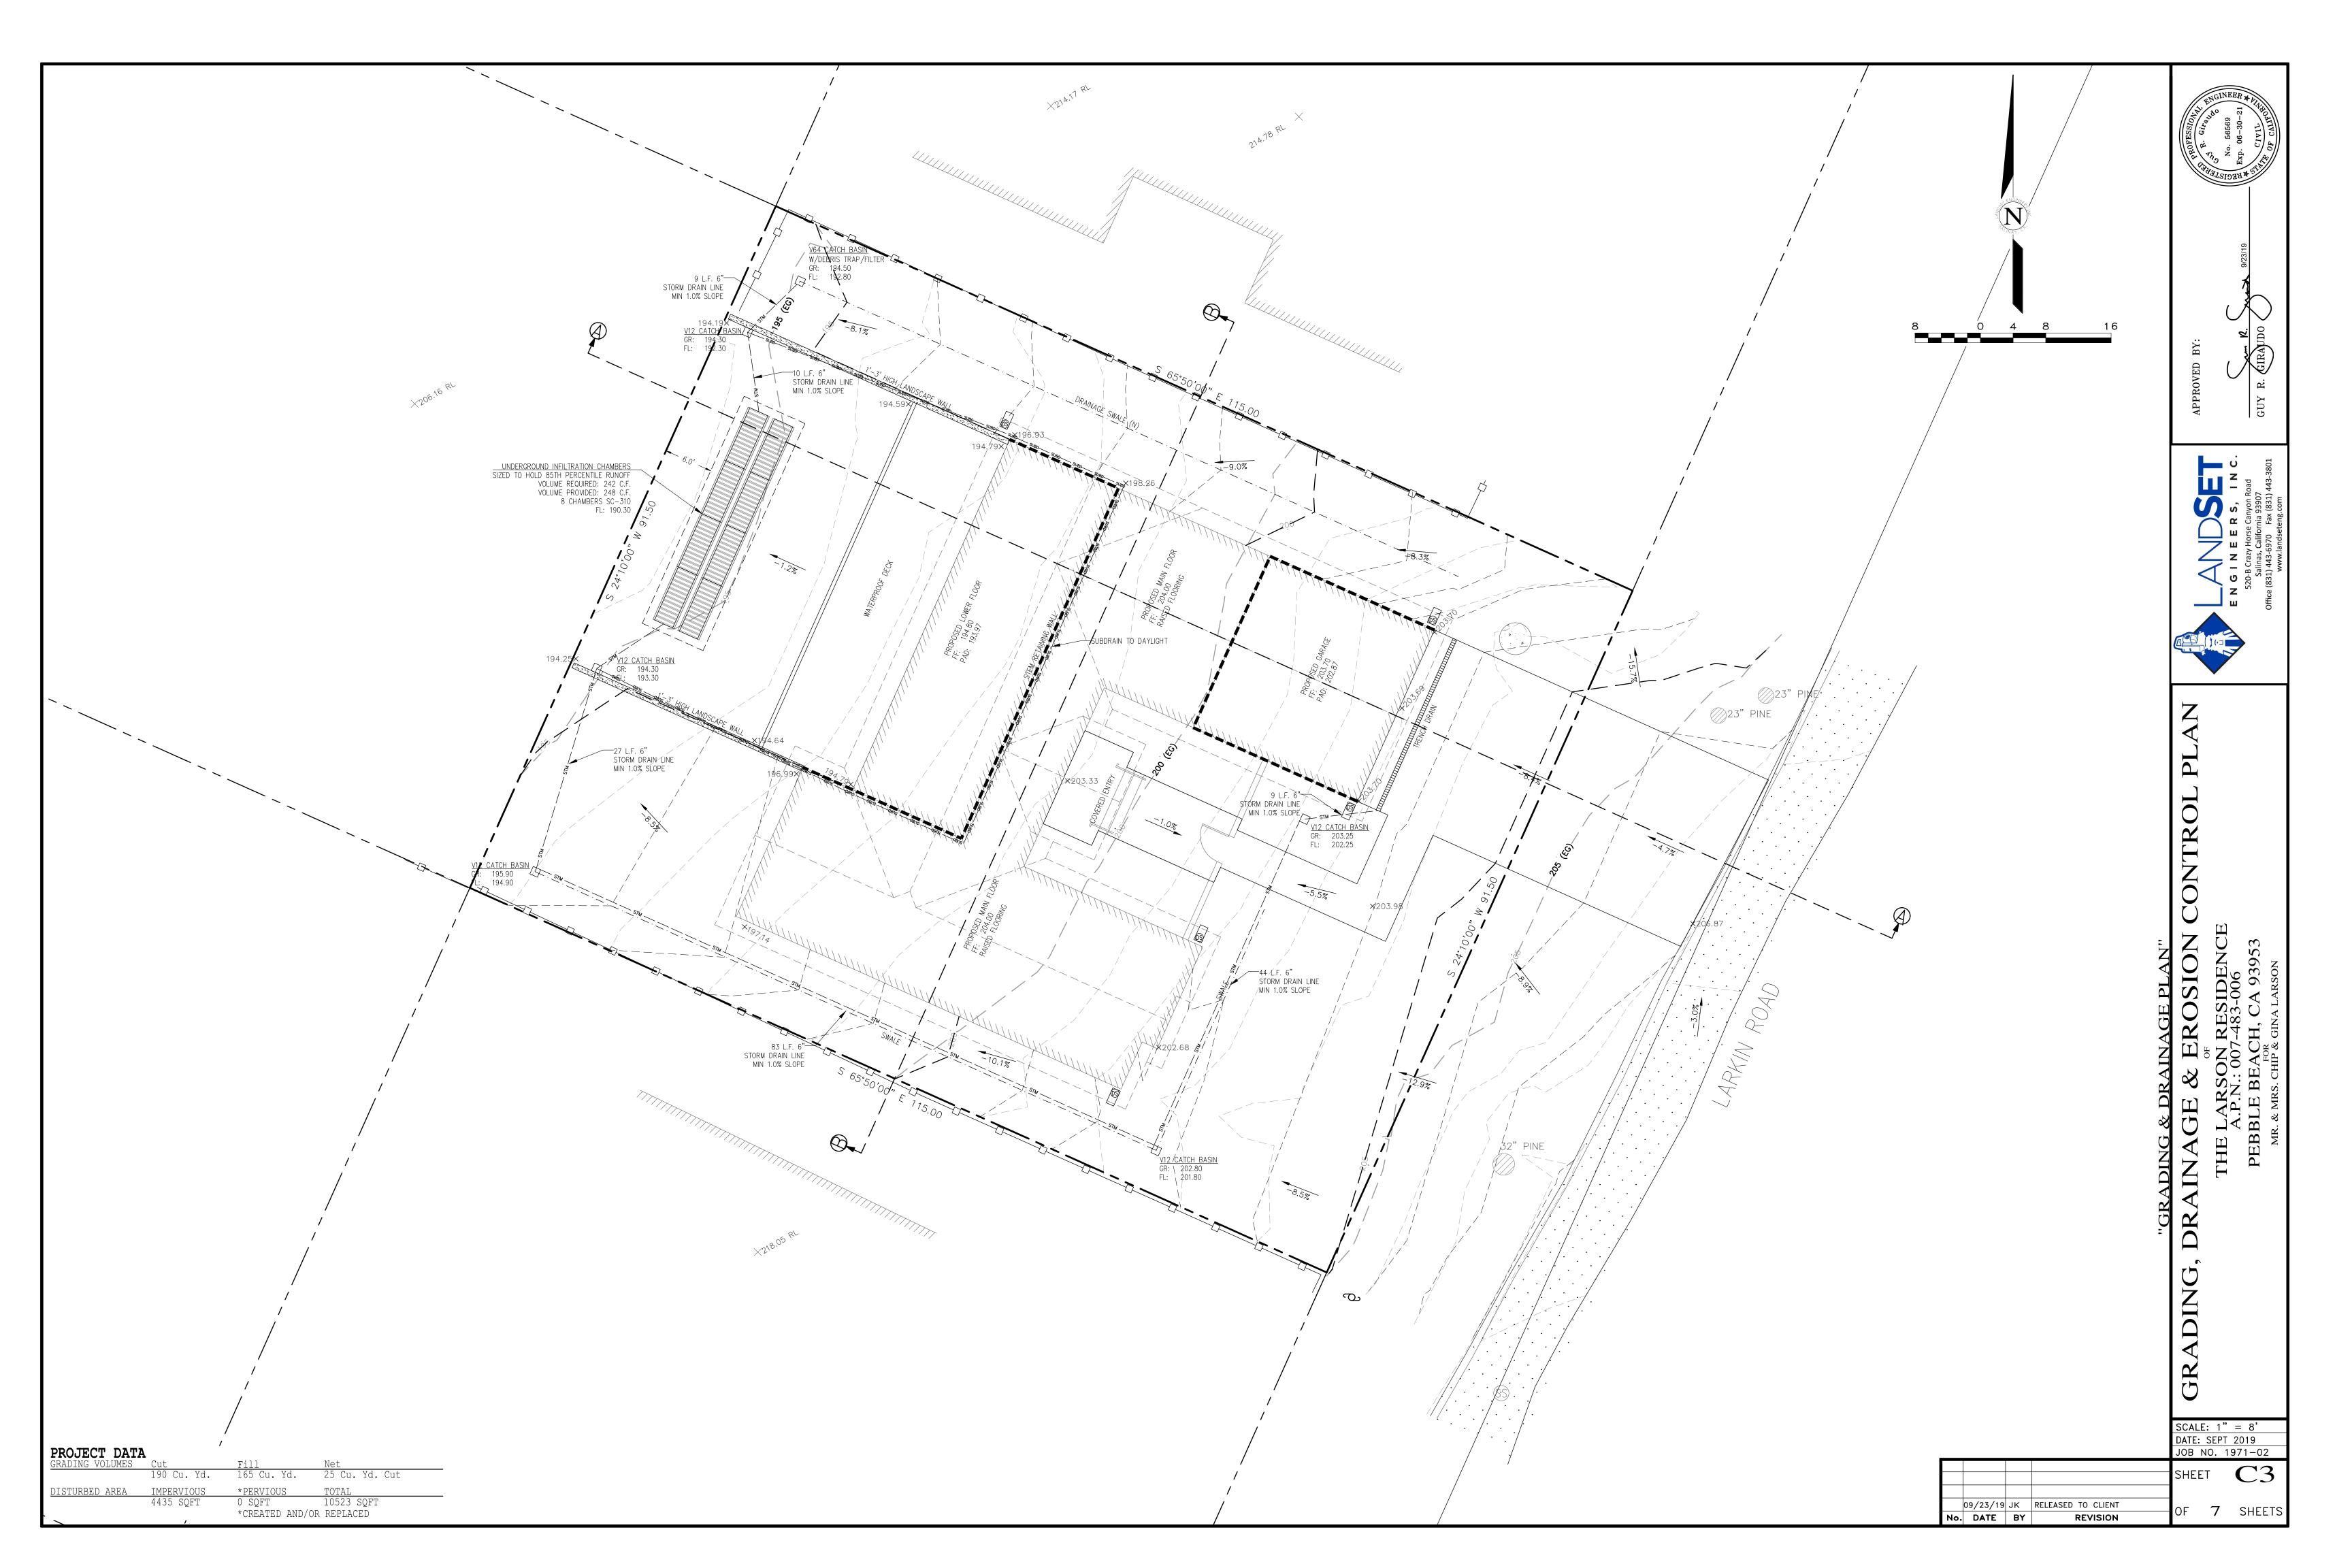





SCALE: 1" = 8'
DATE: SEPT 2019

				JOB	NO.	1971-02
				CLIE	ГТ	
				SHE	ΕI	C 4
	09/23/19	JK	RELEASED TO CLIENT	OF	7	SHEETS
No.	DATE	BY	REVISION	5	/	SHEETS

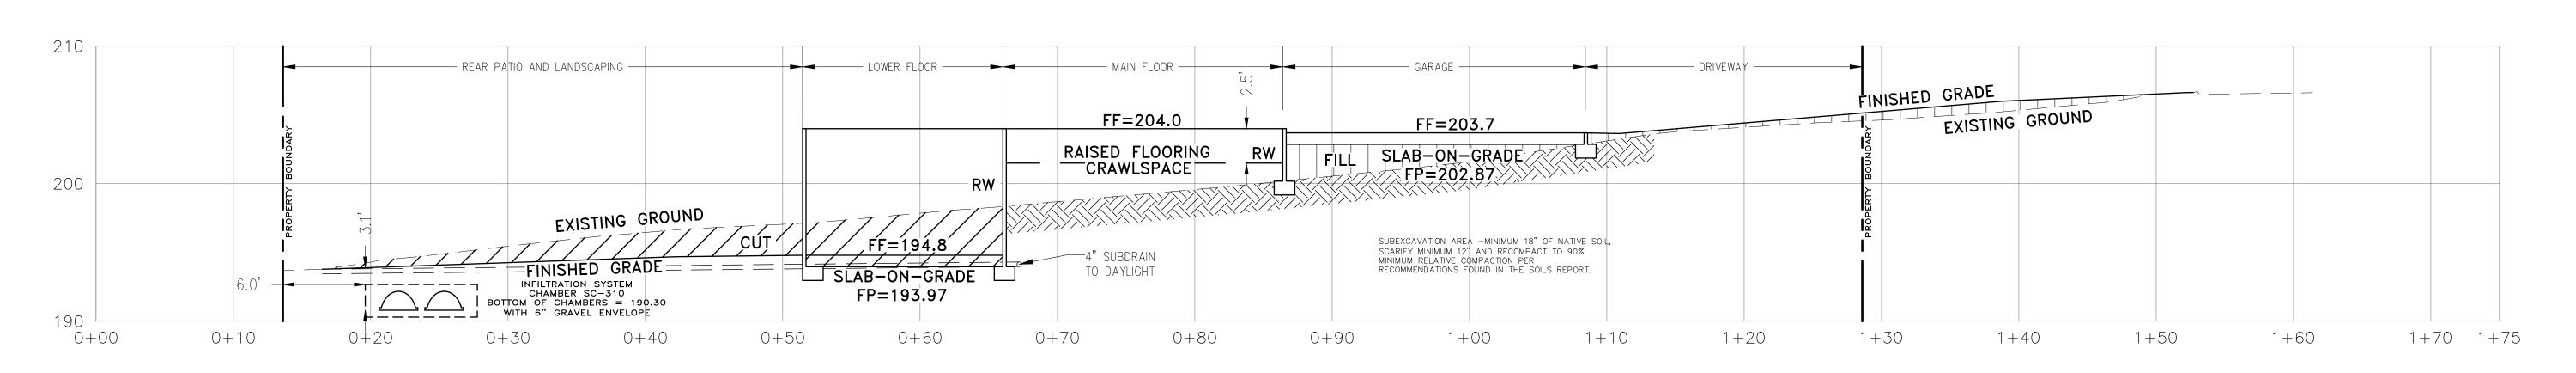

SECTION A-A SCALE: 1:6 H&V

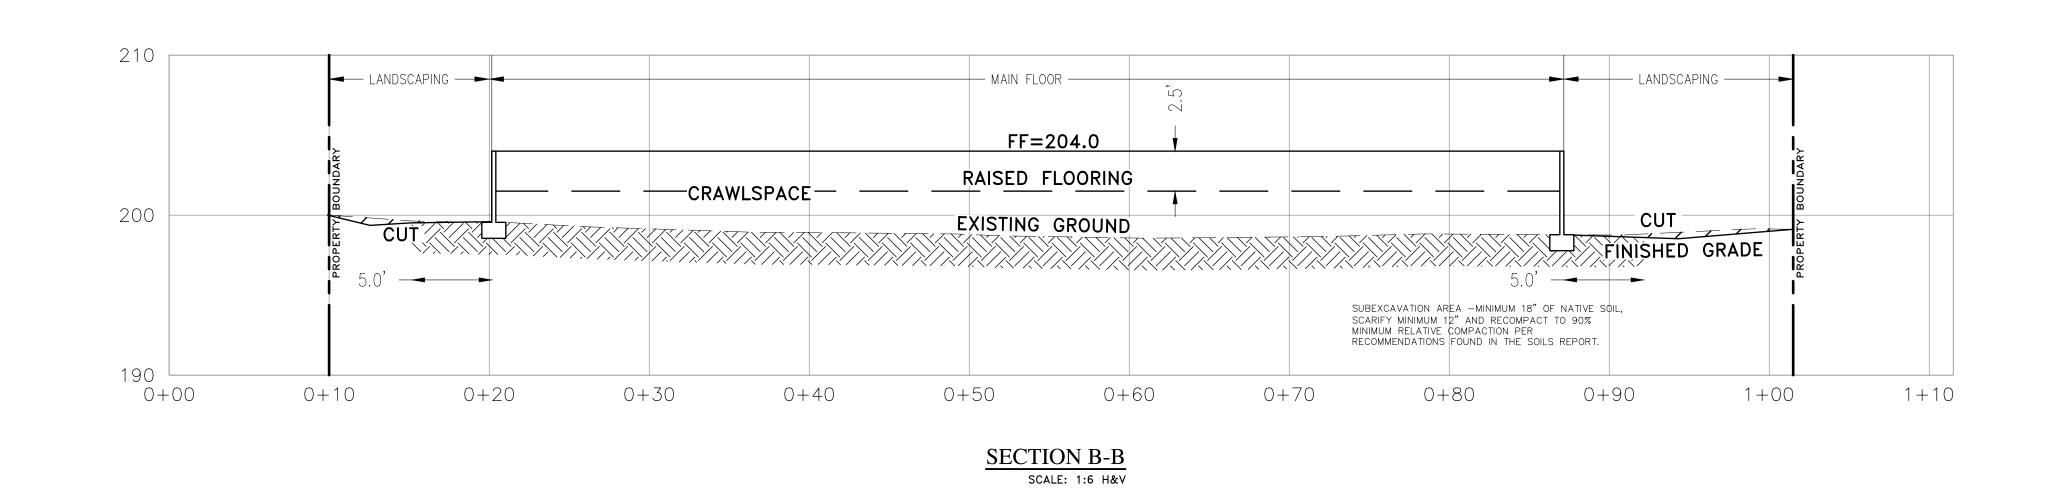

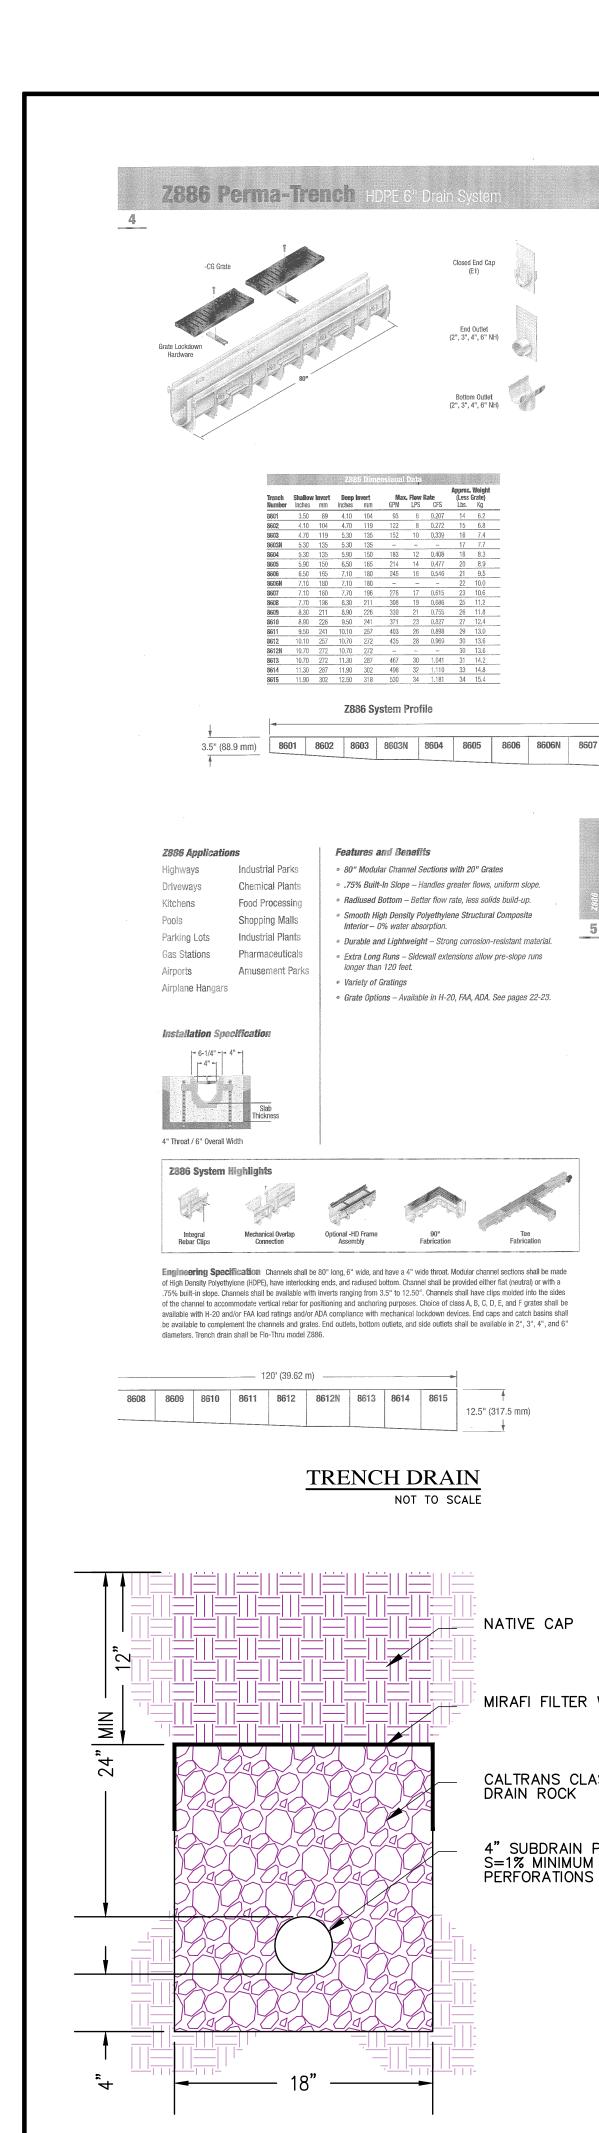

12.5" (317.5 mm)

NATIVE CAP

DRAIN ROCK

S=1% MINIMUM

SUBDRAIN DETAIL


NOT TO SCALE


MIRAFI FILTER WEAVE 300


CALTRANS CLASS 1 TYPE "A" OR "B"

4" SUBDRAIN PERFORATED PIPE

PERFORATIONS FACE DOWN

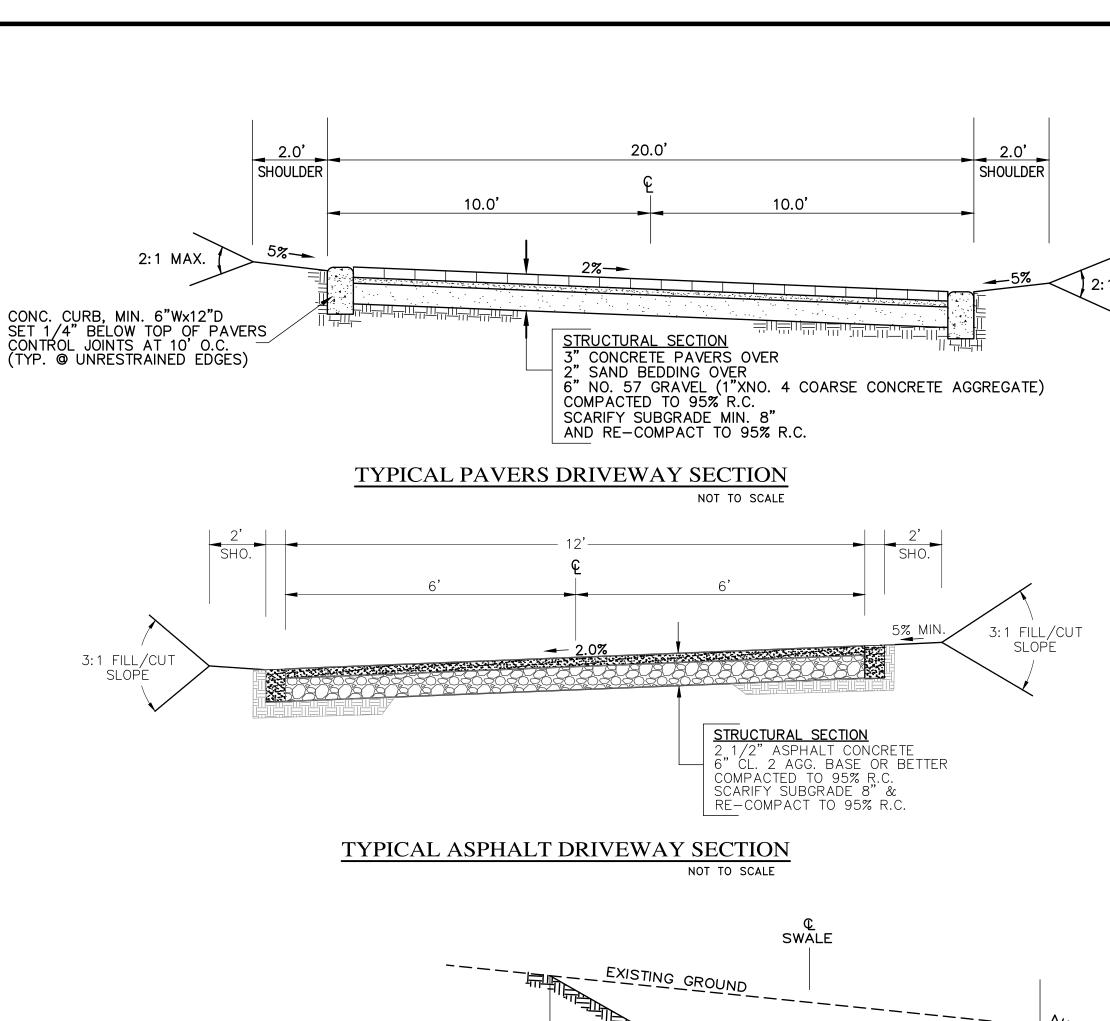

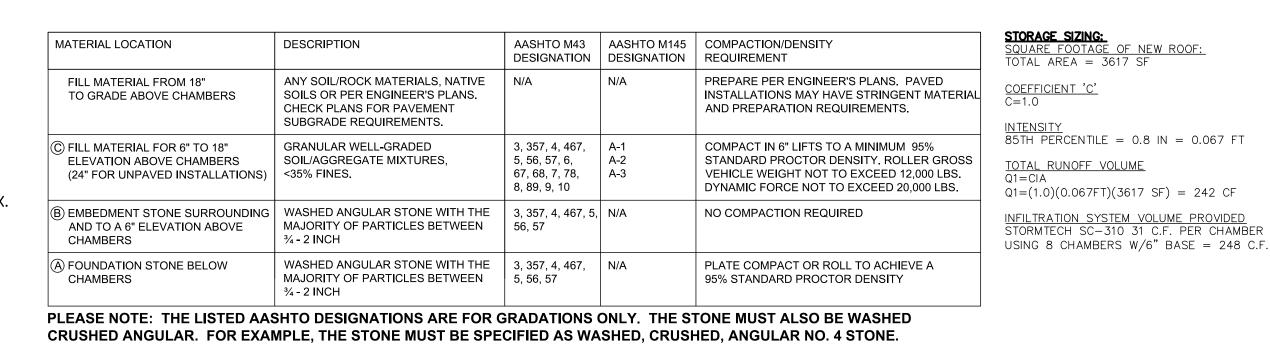

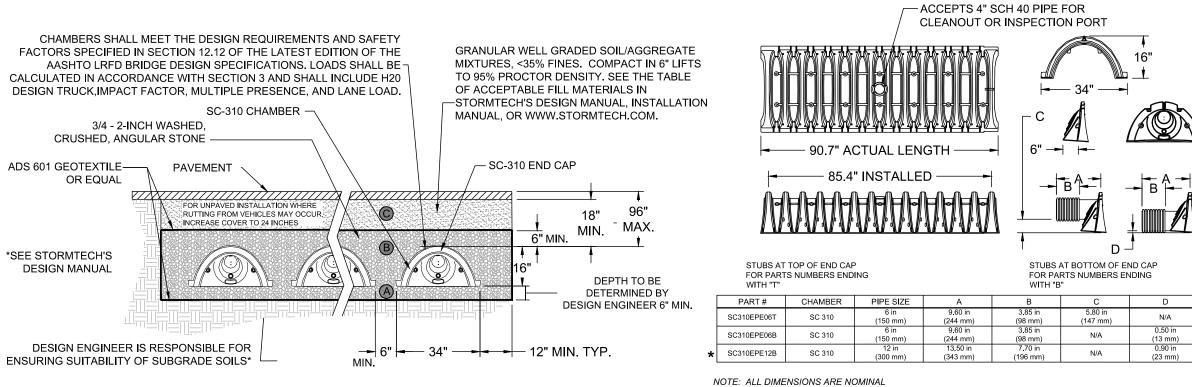



NOMINAL CHAMBER SPECIFICATIONS SIZE (W x H x INSTALLED LENGTH) - 34.0" x 16.0" x 85.4" CHAMBER STORAGE 14.7 CUBIC FEET - 31.0 CUBIC FEET MINIMUM INSTALLED STORAGE WEIGHT 35 LBS.


THAT THE OUTSIDE DIAMETER OF THE STUB IS FLUSH WITH THE BOTTOM OF THE END CAP. FOR ADDITIONAL INFORMATION CONTACT STORMTECH AT 1-888-892-2694.

ARE PLACED AT BOTTOM OF END CAP SUCH LIES BELOW THE BOTTOM OF THE END CAP APPROXIMATELY 0.25". BACKFILL MATERIAL SHOULD BE REMOVED FROM BELOW THE N-12 STUB SO THAT THE FITTING SETS LEVEL.


<u>NIENSITY</u> B5TH PERCENTILE = 0.8 IN = 0.067 FT

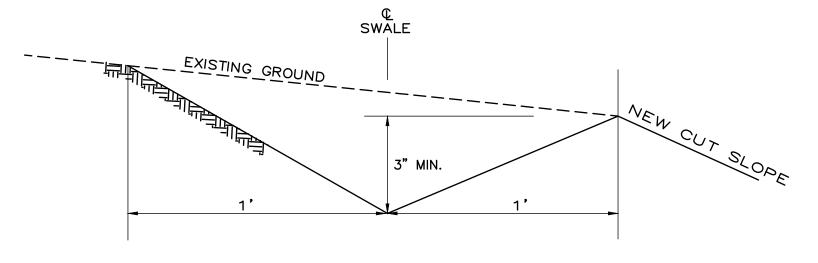

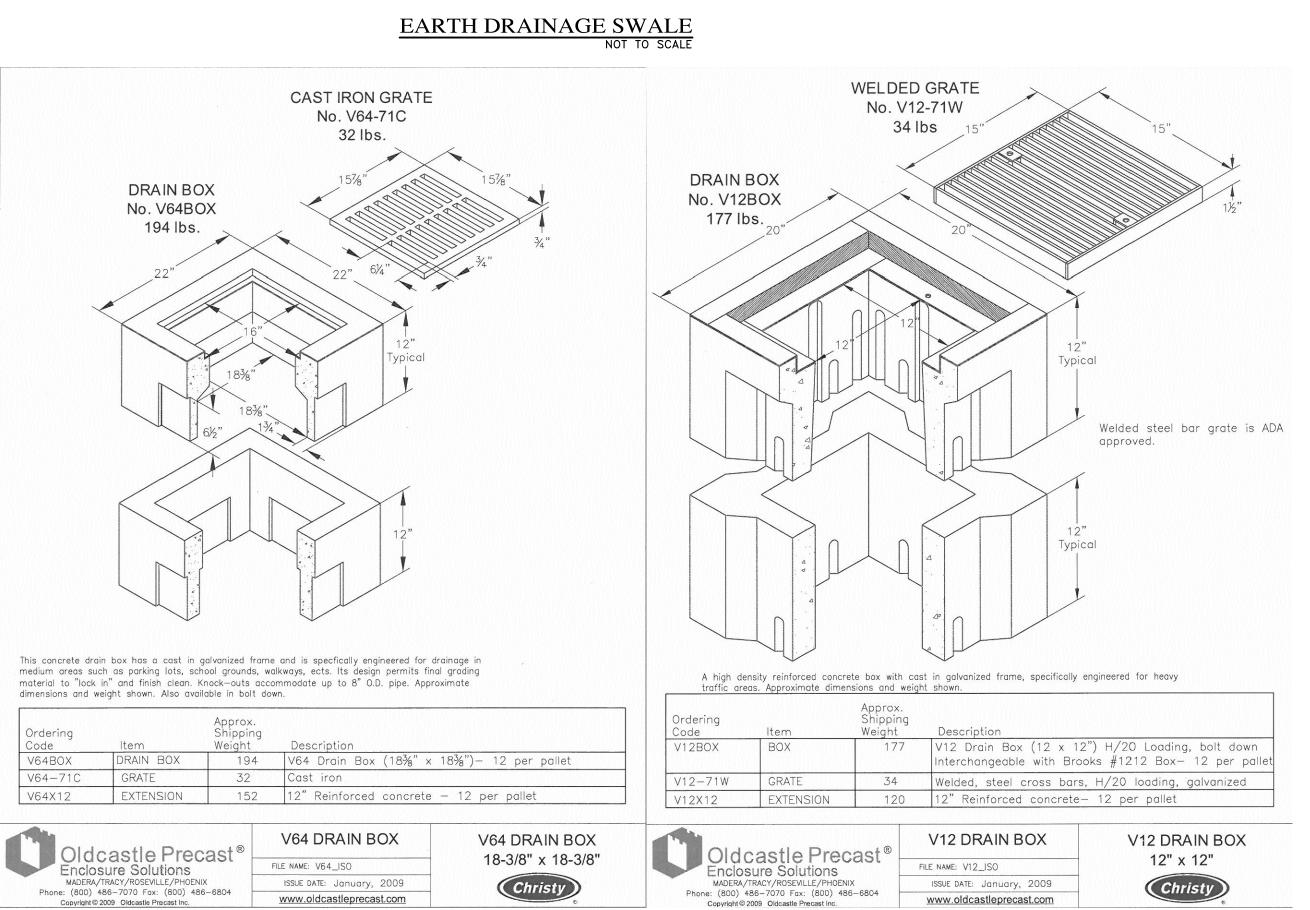

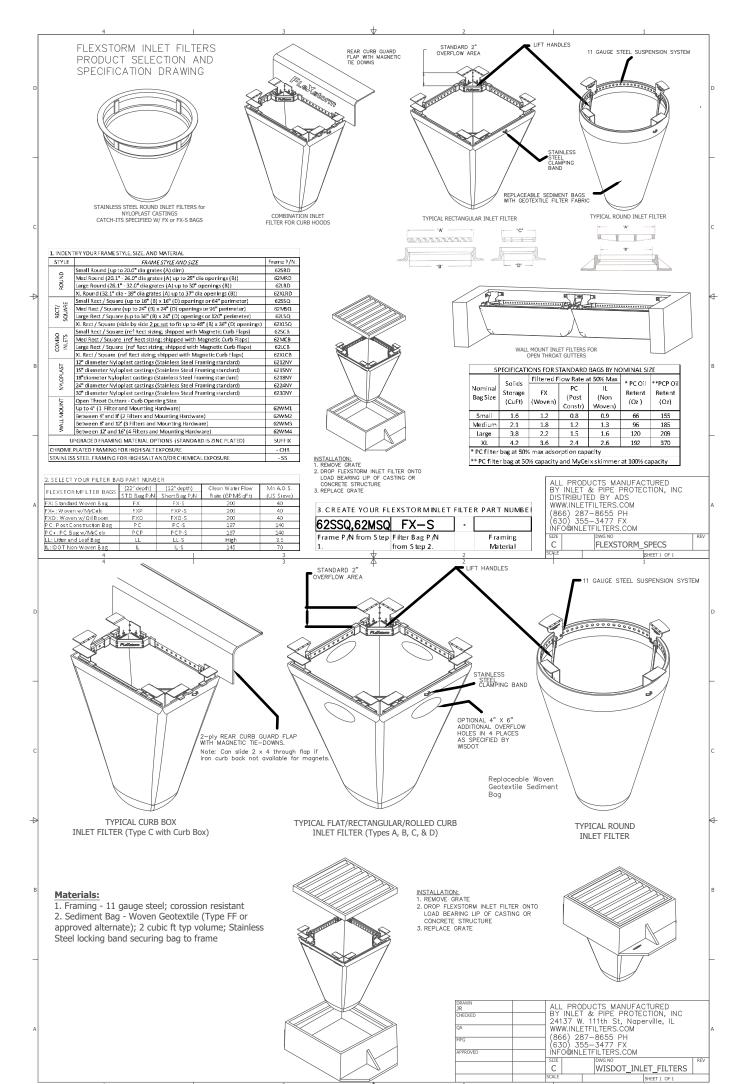

INLET FILTER

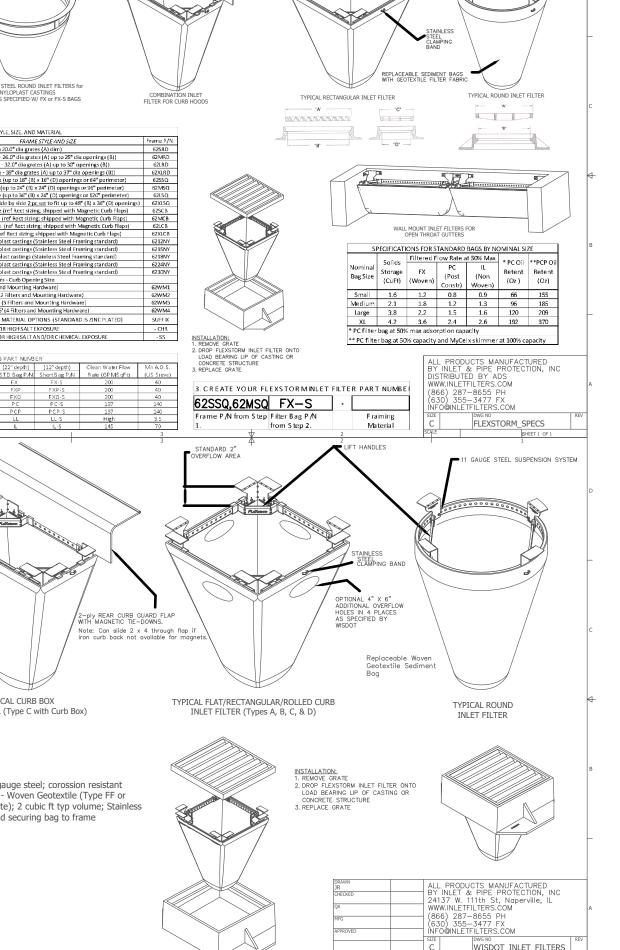

SCALE: 1" = 16' DATE: SEPT 2019

09/23/19 JK | RELEASED TO CLIENT OF 7 SHEETS DATE BY REVISION


THE

JOB NO. 1971-02

V64 CATCH BASIN

V12 CATCH BASIN

NOT TO SCALE

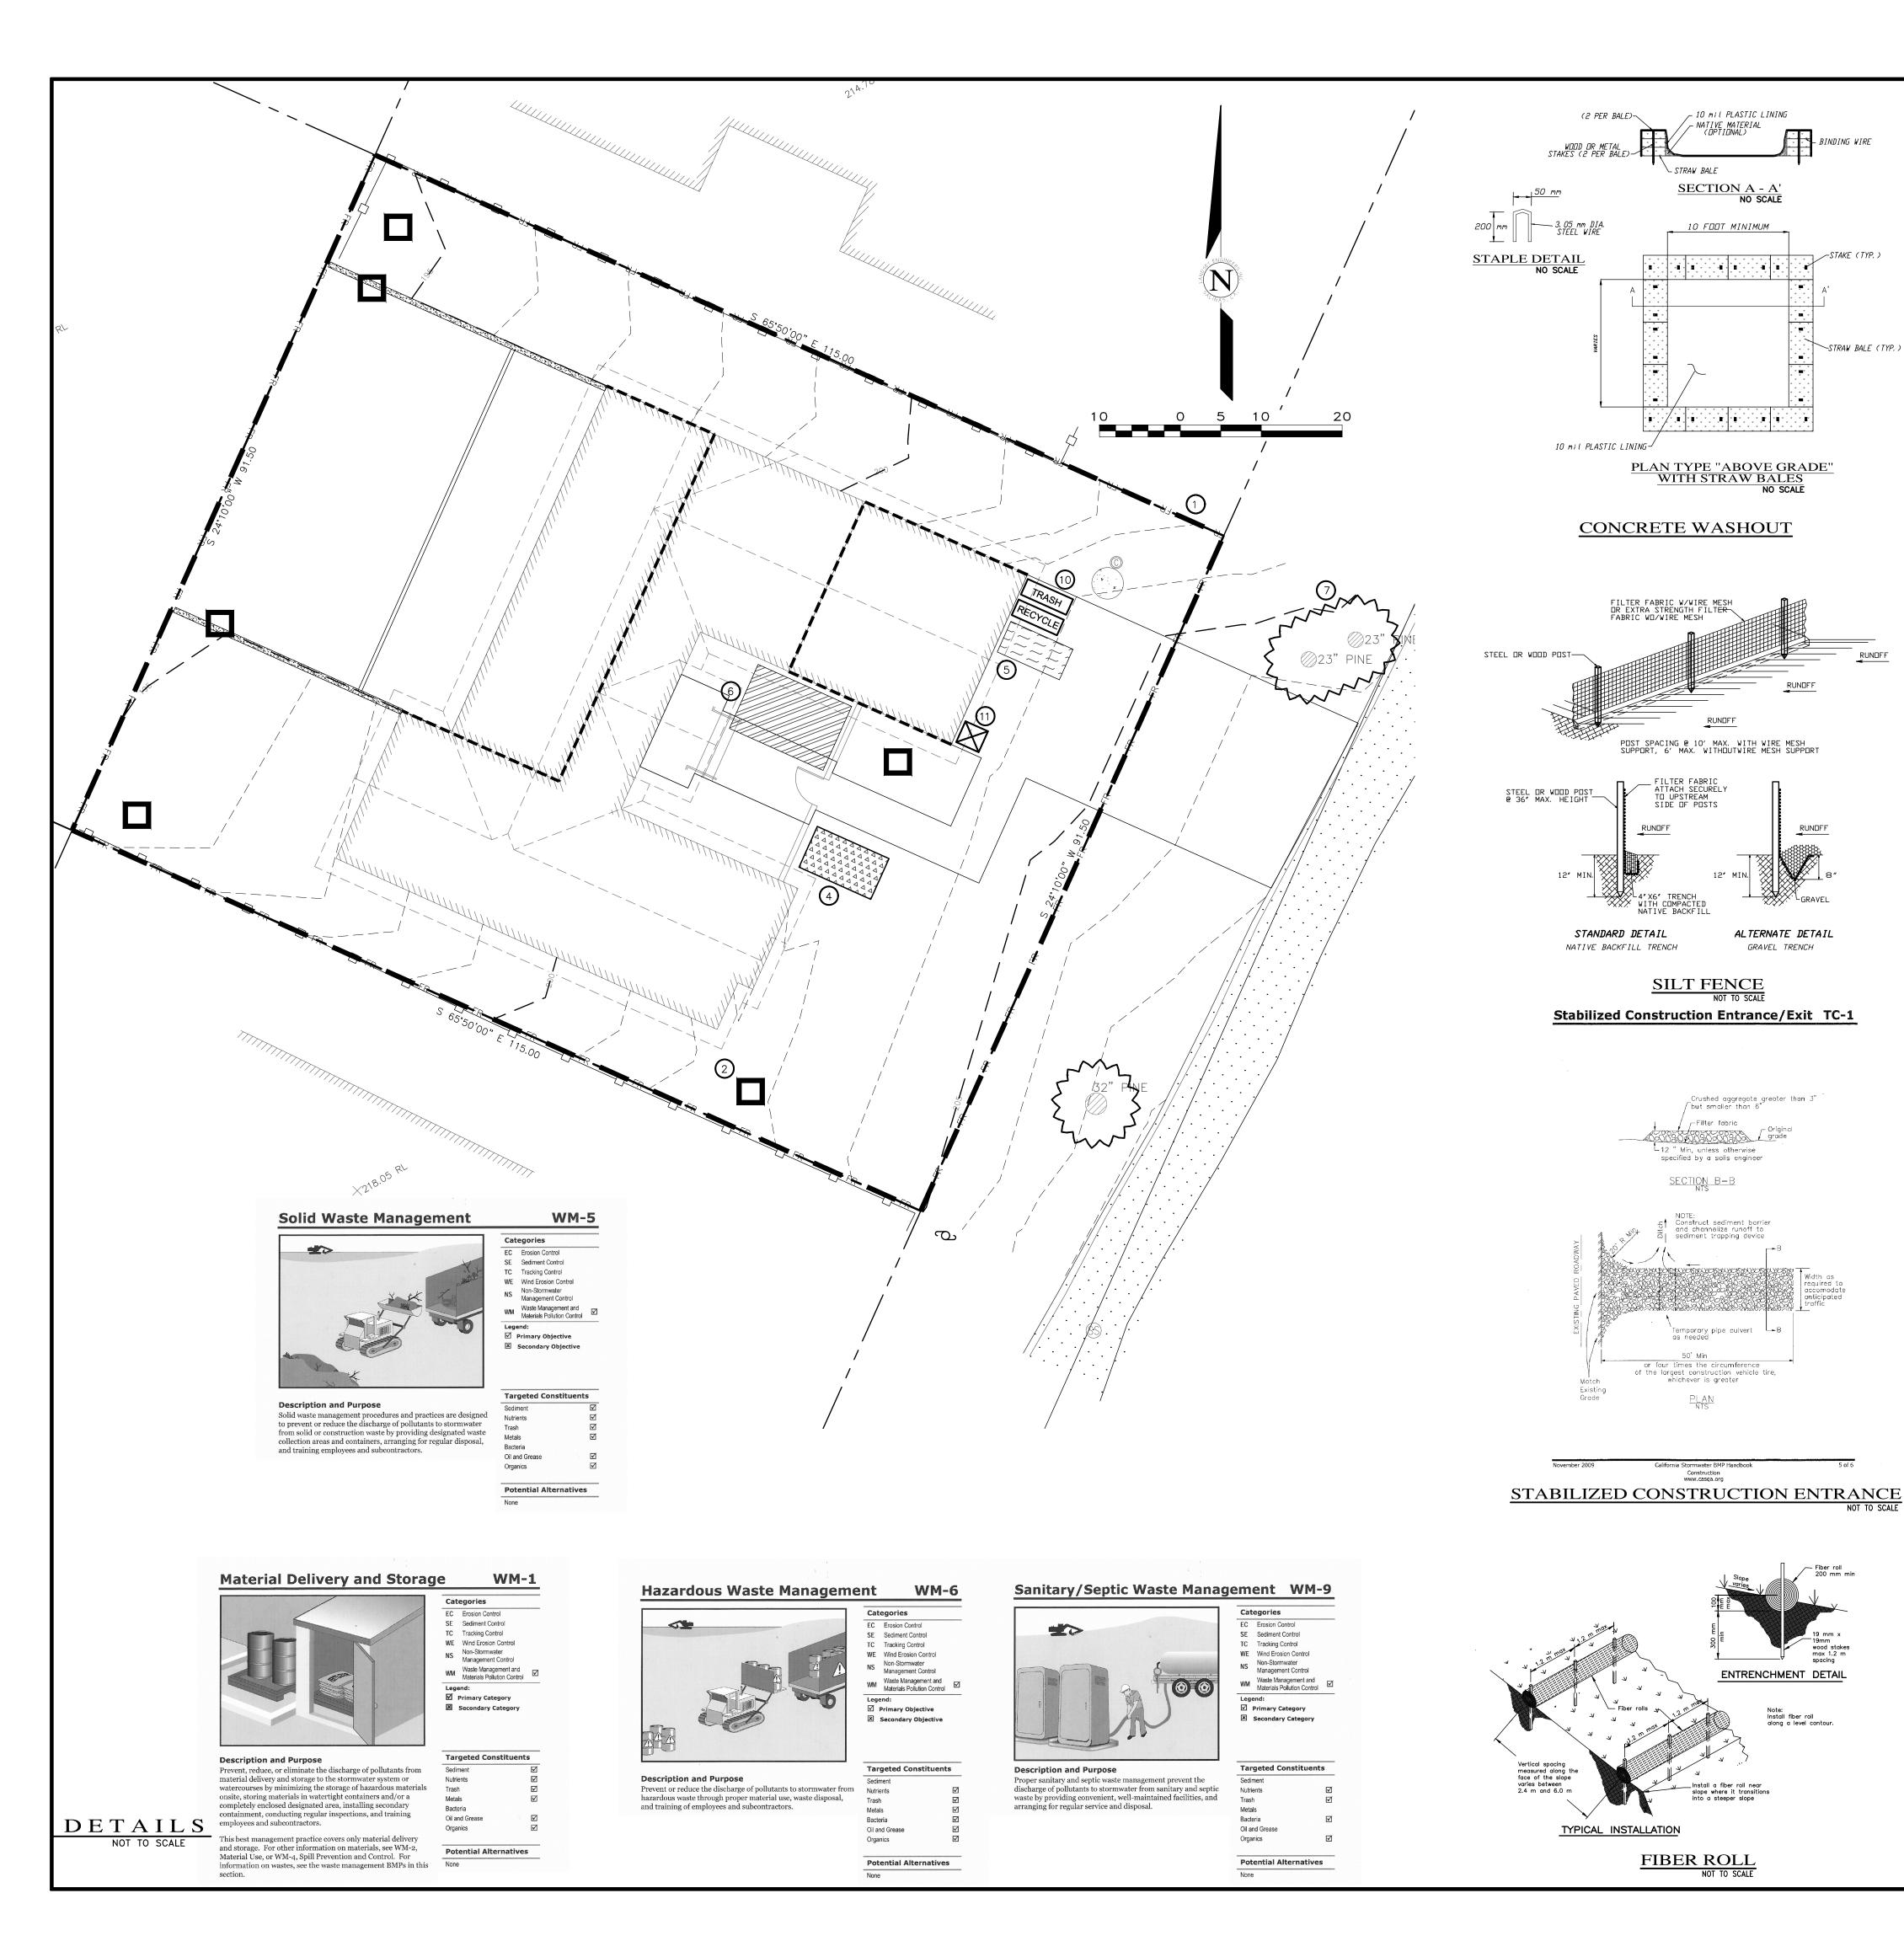

EROSION & SEDIMENT CONTROL NOTES:

_ 10 mil PLASTIC LINING

SECTION A - A

10 FOOT MINIMUM

WITH STRAW BALES

ALTERNATE DETAIL

SILT FENCE

-Filter fabric

-12 " Min, unless otherwise

SECTION B-B

or four times the circumference

FIBER ROLL

ENTRENCHMENT DETAIL

Note: Install fiber roll

specified by a soils engineer

Crushed aggregate greater than 3" / but smaller than 6"

STRAW BALE (TYP.)

- STRAW BALE

- 1) ALL EROSION CONTROL MEASURES SHALL CONFORM WITH THE COUNTY OF MONTEREY EROSION
- 2) ALL SLOPES SHALL BE PROTECTED WITH STRAW MULCH OR SIMILAR MEASURES TO PROTECT AGAINST EROSION UNTIL SUCH SLOPES ARE PERMANENTLY STABILIZED.
- 3) RUNOFF SHALL BE DETAINED OR FILTERED BY BERMS, VEGETATED FILTER STRIPS, AND/OR
- CATCH BASINS TO PREVENT THE ESCAPE OF SEDIMENT FROM THE SITE. 4) EROSION AND SEDIMENT CONTROL MEASURES SHALL BE IN PLACE AT THE END OF EACH DAY'S
- WORK. ACCESS ROADS SHALL BE CLEANED DAILY (IF NECESSARY) AND PRIOR TO ANY RAIN EVENT. 5) ALL ROADS AND DRIVEWAYS SHALL HAVE DRAINAGE FACILITIES SUFFICIENT TO PREVENT EROSION
- ON OR ADJACENT TO THE ROADWAY OR ON THE DOWNHILL PROPERTIES. 6) CONTRACTOR SHALL PROVIDE WATERING FOR DUST CONTROL DURING ALL GROUND DISTURBANCE
- 7) REVEGETATION SHALL CONSIST OF A MECHANICALLY APPLIED HYDROMULCH SLURRY OR HAND SEEDED WITH A STRAW MULCH COVER. MULCH SHALL BE ANCHORED BY AN APPROVED METHOD SUCH AS PUNCHING, TACKING, OR THE USE OF JUTE NETTING, AS DEEMED NECESSARY FOR THE SITE CONDITIONS TO ALLOW FOR GERMINATION AND ENABLE ADEQUATE GROWTH TO BE
- 8) CHECK DAMS, SILT FENCES, FIBER ROLLS OR OTHER DESIGNS SHALL BE INCORPORATED TO CATCH ANY SEDIMENT UNTIL AFTER THE NEWLY EXPOSED AREAS ARE REVEGETATED SUFFICIENTLY TO CONTROL EROSION. EROSION CONTROL PLANTINGS AND MULCH SHALL BE CLOSELY MONITORED THROUGHOUT THE WINTER AND ANY RUNOFF PROBLEMS SHALL BE CORRECTED PROMPTLY. ALL EROSION AND/OR SLIPPAGE OF THE NEWLY EXPOSED AREAS SHALL BE REPAIRED BY THE PERMITTEE AT THEIR EXPENSE.
- 9) THE GRASS SEED SHALL BE PROPERLY IRRIGATED UNTIL ADEQUATE GROWTH IS ESTABLISHED AND MAINTAINED TO PROTECT THE SITE FROM FUTURE EROSION DAMAGE. ALL NEWLY EXPOSED (DISTURBED) AREAS SHALL BE SEEDED WITH THE FOLLOWING EROSION CONTROL MIX: BROMUS CARINATUS (CALIFORNIA BROME), VULPIA MICROSTACHYS (NUTTALL'S FESCUE), ELYMUS GLAUCUS (BLUE WILD RYE), HORDEUM BRACHYANTHERUM (MEADOW BARLEY), FESTUCA RUNRA'MOLATE BLUE AND A MIXTURE OF LOCALLY NATIVE WILDFLOWERS.
- 10) SEEDED AREAS SHALL BE RETAINED ON-SITE AND SHALL BE PREVENTED FROM FLOWING INTO THE STORM DRAINAGE SYSTEM. SEDIMENT CATCHMENT BARRIERS SHALL BE INSPECTED BY THE APPLICANT IMMEDIATLEY AFTER ANY SIGNIFICANT RAINFALL AND AT LEAST DAILY DURING ANY PERIOD OF PROLONGED RAINFALL.
- 11) PRIOR TO COMMENCEMENT OF ANY LAND DISTURBANCE, THE OWNER/APPLICANT SHALL SCHEDULE AN INSPECTION WITH RMA-ENVIRONMENTAL SERVICES TO ENSURE ALL NECESSARY SEDIMENT CONTROLS ARE IN PLACE AND THE PROJECT IS COMPLIANT WITH MONTEREY COUNTY GRADING AND EROSION CONTROL REGULATIONS.
- 12) DURING CONSTRUCTION THE OWNER/APPLICANT SHALL SCHEDULE AN INSPECTION WITH RMA-ENVIRONMENTAL SERVICES TO UPDATE COMPACTION TEST RECORDS, INSPECT DRAINAGE DEVICE INSTALLATION, REVIEW THE MAINTENANCE AND EFFECTIVENESS OF BMPS INSTALLED, AS WELL AS, TO VERIFY THAT POLLUTANTS OF CONCERN ARE NOT DISCHARGED FROM THE SITE.
- 13) PRIOR TO FINAL INSPECTION, THE OWNER/APPLICANT SHALL SCHEDULE AN INSPECTION WITH RMA-ENVIRONMENTAL SERVICES TO CONDUCT A FINAL GRADING INSPECTION, COLLECT FINAL GEOTECHNICAL LETTER OF CONFORMANCE, ENSURE THAT ALL DISTURBED AREAS HAVE BEEN STABILIZED AND THAT ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES THAT ARE NO LONGER NEEDED HAVE BEEN REMOVED.
- 14) THE APPLICANT SHALL SCHEDULE WEEKLY INSPECTIONS WITH RMA-ENVIRONMENTAL SERVICES DURING THE RAINY SEASON, OCTOBER 15th TO APRIL 15th, TO ENSURE CONTAMINANTS ARE NOT DISCHARGED INTO THE AREAS OF SPECIAL BIOLOGICAL SIGNIFICANCE.



N/A FOR

INFORMATION ONLY

INFORMATION ONLY

ESTABLISHED.

FIBER ROLLS: THE CONTRACTOR SHALL MAINTAIN A STOCKPILE OF FIBER ROLLS ONSITE, AS THEY CAN BE USED ALONG ERODIBLE SLOPES, ALONG STOCKPILE PERIMETERS, DOWNSLOPE OF EXPOSED SOIL AREAS, AND TO DELINEATE/PROTECT STAGING AREAS. FIBER ROLLS MUST BE TRENCHED INTO THE SOIL AND STAKED (STAKES SPACED MAX. 4' ON CENTER), SEE DETAIL. INSTALL FIBER ROLLS ALONG LEVEL CONTOURS, AND TURN THE ENDS UPHILL. INSPECT WEEKLY AND REMOVE ACCUMULATED SEDIMENT REGULARLY.

DRAIN INLET PROTECTION: PLACE GEOTEXTILE FILTER FABRIC BENEATH INLET GRATE AND SURROUND ENTIRE INLET WITH GRAVEL BAGS (OVERLAP THE BAGS AND PACK THEM TIGHTLY TOGETHER - SEE DETAIL). INSPECT ALL INLET PROTECTION WEEKLY. REMOVE ACCUMULATED SEDIMENT REGULARLY. INFORMATION ONLY

> STABILIZED CONSTRUCTION ACCESS: INSTALL STABILIZED CONSTRUCTION ACCESS PRIOR TO COMMENCEMENT OF EARTH MOVING OPERATIONS (IF NECESSARY FOR THIS APPLICATION, SEE DETAIL). INSPECT ENTRANCE DAILY, AND ADD ADDITIONAL STONE AS TOP-DRESSING WHEN REQUIRED. USE FENCING OR BARRICADES TO PREVENT VEHICLE TRAFFIC FROM DRIVING AROUND THE STABILIZED ACCESS.

STOCKPILE MANAGEMENT: SOIL STOCKPILES MUST BE COVERED OR STABILIZED (I.E. WITH SOIL BINDERS) IMMEDIATELY IF THEY ARE NOT SCHEDULED TO BE USED WITHIN 14 DAYS. ACTIVE SOIL STÓCKPILES SHALL BE WATERED TWICE DAILY TO AVOID WIND EROSION. SURROUND ALL STOCKPILES WITH FIBER ROLLS OR SILT FENCE. STOCKPILES OF "COLD MIX", TREATED WOOD, AND BASIC CONSTRUCTION MATERIALS SHOULD BE PLACED ON AND COVERED WITH PLASTIC SHEETING OR COMPARABLE MATERIAL AND SURROUNDED BY A BERM.

CONCRETE WASHOUT: WASHOUT MUST BE LOCATED A MINIMUM OF 50 FEET FROM STORM DRAINS, OPEN DITCHES, OR WATER BODIES. DISCONTINUE USE WHEN WASHOUT WASTES REACH 75% OF THE WASHOUT CAPACITY. ALLOW WASHOUT WASTES TO HARDEN, BE BROKEN UP, AND THEN DISPOSED OF PROPERLY.

> CONTRACTOR'S STAGING AREA: THE CONTRACTOR'S STAGING AREA SHALL BE SURROUNDED BY FIBER ROLLS. THE STAGING AREA WILL BE USED TO STORE DELIVERED MATERIALS, AND FOR OVERNIGHT EQUIPMENT PARKING/FUELING. STORED CONSTRUCTION MATERIALS SHALL BE MAINTAINED IN THEIR ORIGINAL CONTAINERS, AND COVERED AT ALL TIMES. PETROLEUM PRODUCTS AND HAZARDOUS MATERIALS SHALL BE STORED WITHIN SECONDARY CONTAINMENT STRUCTURES OR A STORAGE SHED. EQUIPMENT FUELING AND MAINTENANCE WILL ONLY OCCUR WITHIN THE DESIGNATED STAGING AREA. DRIP PANS OR ABSORBENT PADS MUST BE USED DURING ALL FUELING OR MAINTENANCE ACTIVITIES. AN AMPLE SUPPLY OF SPILL CLEANUP MATERIALS SHALL BE MAINTAINED IN THE STAGING AREA AT ALL TIMES.

TREE PROTECTION: TREE PROTECTION SHALL CONSIST OF ORANGE PLASTIC MESH FENCING,

AND SHALL BE INSTALLED PRIOR TO COMMENCEMENT OF EARTH-MOVING OPERATIONS (SEE DETAIL). INSTALL FENCING ALONG THE DRIP LINE OF TREES, AND INSTRUCT EMPLOYEES AND SUBCONTRACTORS TO HONOR PROTECTIVE DEVICES. TREE INJURIES SHALL BE ATTENDED TO BE A LICENSED AND CERTIFIED ARBORIST. SILT FENCE: SILT FENCE SHALL CONSIST OF WOVEN GEOTEXTILE FABRIC WITH A MINIMUM WIDTH OF 36 INCHES. WOOD STAKES SHALL BE COMMERCIAL QUALITY LUMBER, SPACED A MAXIMUM

> FROM FLOWING AROUND THE FENCE. INSPECT SILT FENCE DAILY, AND MAKE REPAIRS GRAVEL BAG CHECK DAM: GRAVEL BAGS SHALL CONSIST OF WOVEN POLYPROPYLENE, POLYETHYLENE OR POLYAMIDE FABRIC, MIN. UNIT WEIGHT OF 40Z/SY. BAGS SHALL BE A MINIMUM OF 18" LONG X 12" WIDE X 3" THICK, FILLED WITH 0.5" - 1" CRUSHED ROCK. TIGHTLY ABUT BAGS AND CONSTRUCT CHECK DAM AT LEAST 3 BAGS WIDE X 2 BAGS HIGH. INSPECT

OF 6' APART AND DRIVEN SECURELY INTO THE GROUND (SEE DETAIL). FENCING FABRIC SHALL

BE KEYED INTO THE SOIL AS PER MANUFACTURER'S RECOMMENDATIONS. INSTALL SILT FENCE

ALONG LEVEL CONTOURS. TURN THE ENDS OF THE SILT FENCE UPHILL TO PREVENT WATER


WASTE MANAGEMENT: SOLID WASTES WILL BE LOADED DIRECTLY ONTO TRUCKS FOR OFF-SITE DISPOSAL. WHEN ON-SITE STORAGE IS NECESSARY, SOLID WASTES WILL BE STORED IN WATERTIGHT DUMPSTERS IN THE GENERAL STORAGE AREA OF THE CONTRACTOR'S YARD. TRASH DUMPSTERS AND/OR TRASH BINS SHALL BE COVERED AT THE END OF EACH WORK DAY. RECYCLE HAZARDOUS WASTES SHALL NOT BE STORED ONSITE. CONSTRUCTION DEBRIS AND GENERAL LITTER WILL BE COLLECTED DAILY AND WILL NOT BE ALLOWED NEAR DRAINAGE INLETS OR DRAINAGE SYSTEMS.

CHECK DAM REGULARLY AND REMOVE ACCUMULATED SEDIMENT.

SANITARY/SEPTIC WASTE MANAGEMENT: PORTABLE TOILETS WILL BE PROVIDED AND MAINTAINED ONSITE FOR THE DURATION OF THE PROJECT. ALL PORTABLE TOILETS WILL BE EQUIPPED WITH A SECONDARY CONTAINMENT TRAY, AND SHALL BE LOCATED A MINIMUM OF 50' FROM ALL OPERATIONAL STORM DRAIN INLETS. WEEKLY MAINTENANCE SHALL BE PROVIDED AND WASTES LEGALLY DISPOSED OF OFF-SITE.

SCALE: 1" = 10' DATE: SEPT 2019


SHEET 09/23/19 JK | RELEASED TO CLIENT OF 7 SHEETS DATE BY REVISION




SION

'HE

IOB NO. 1971-02

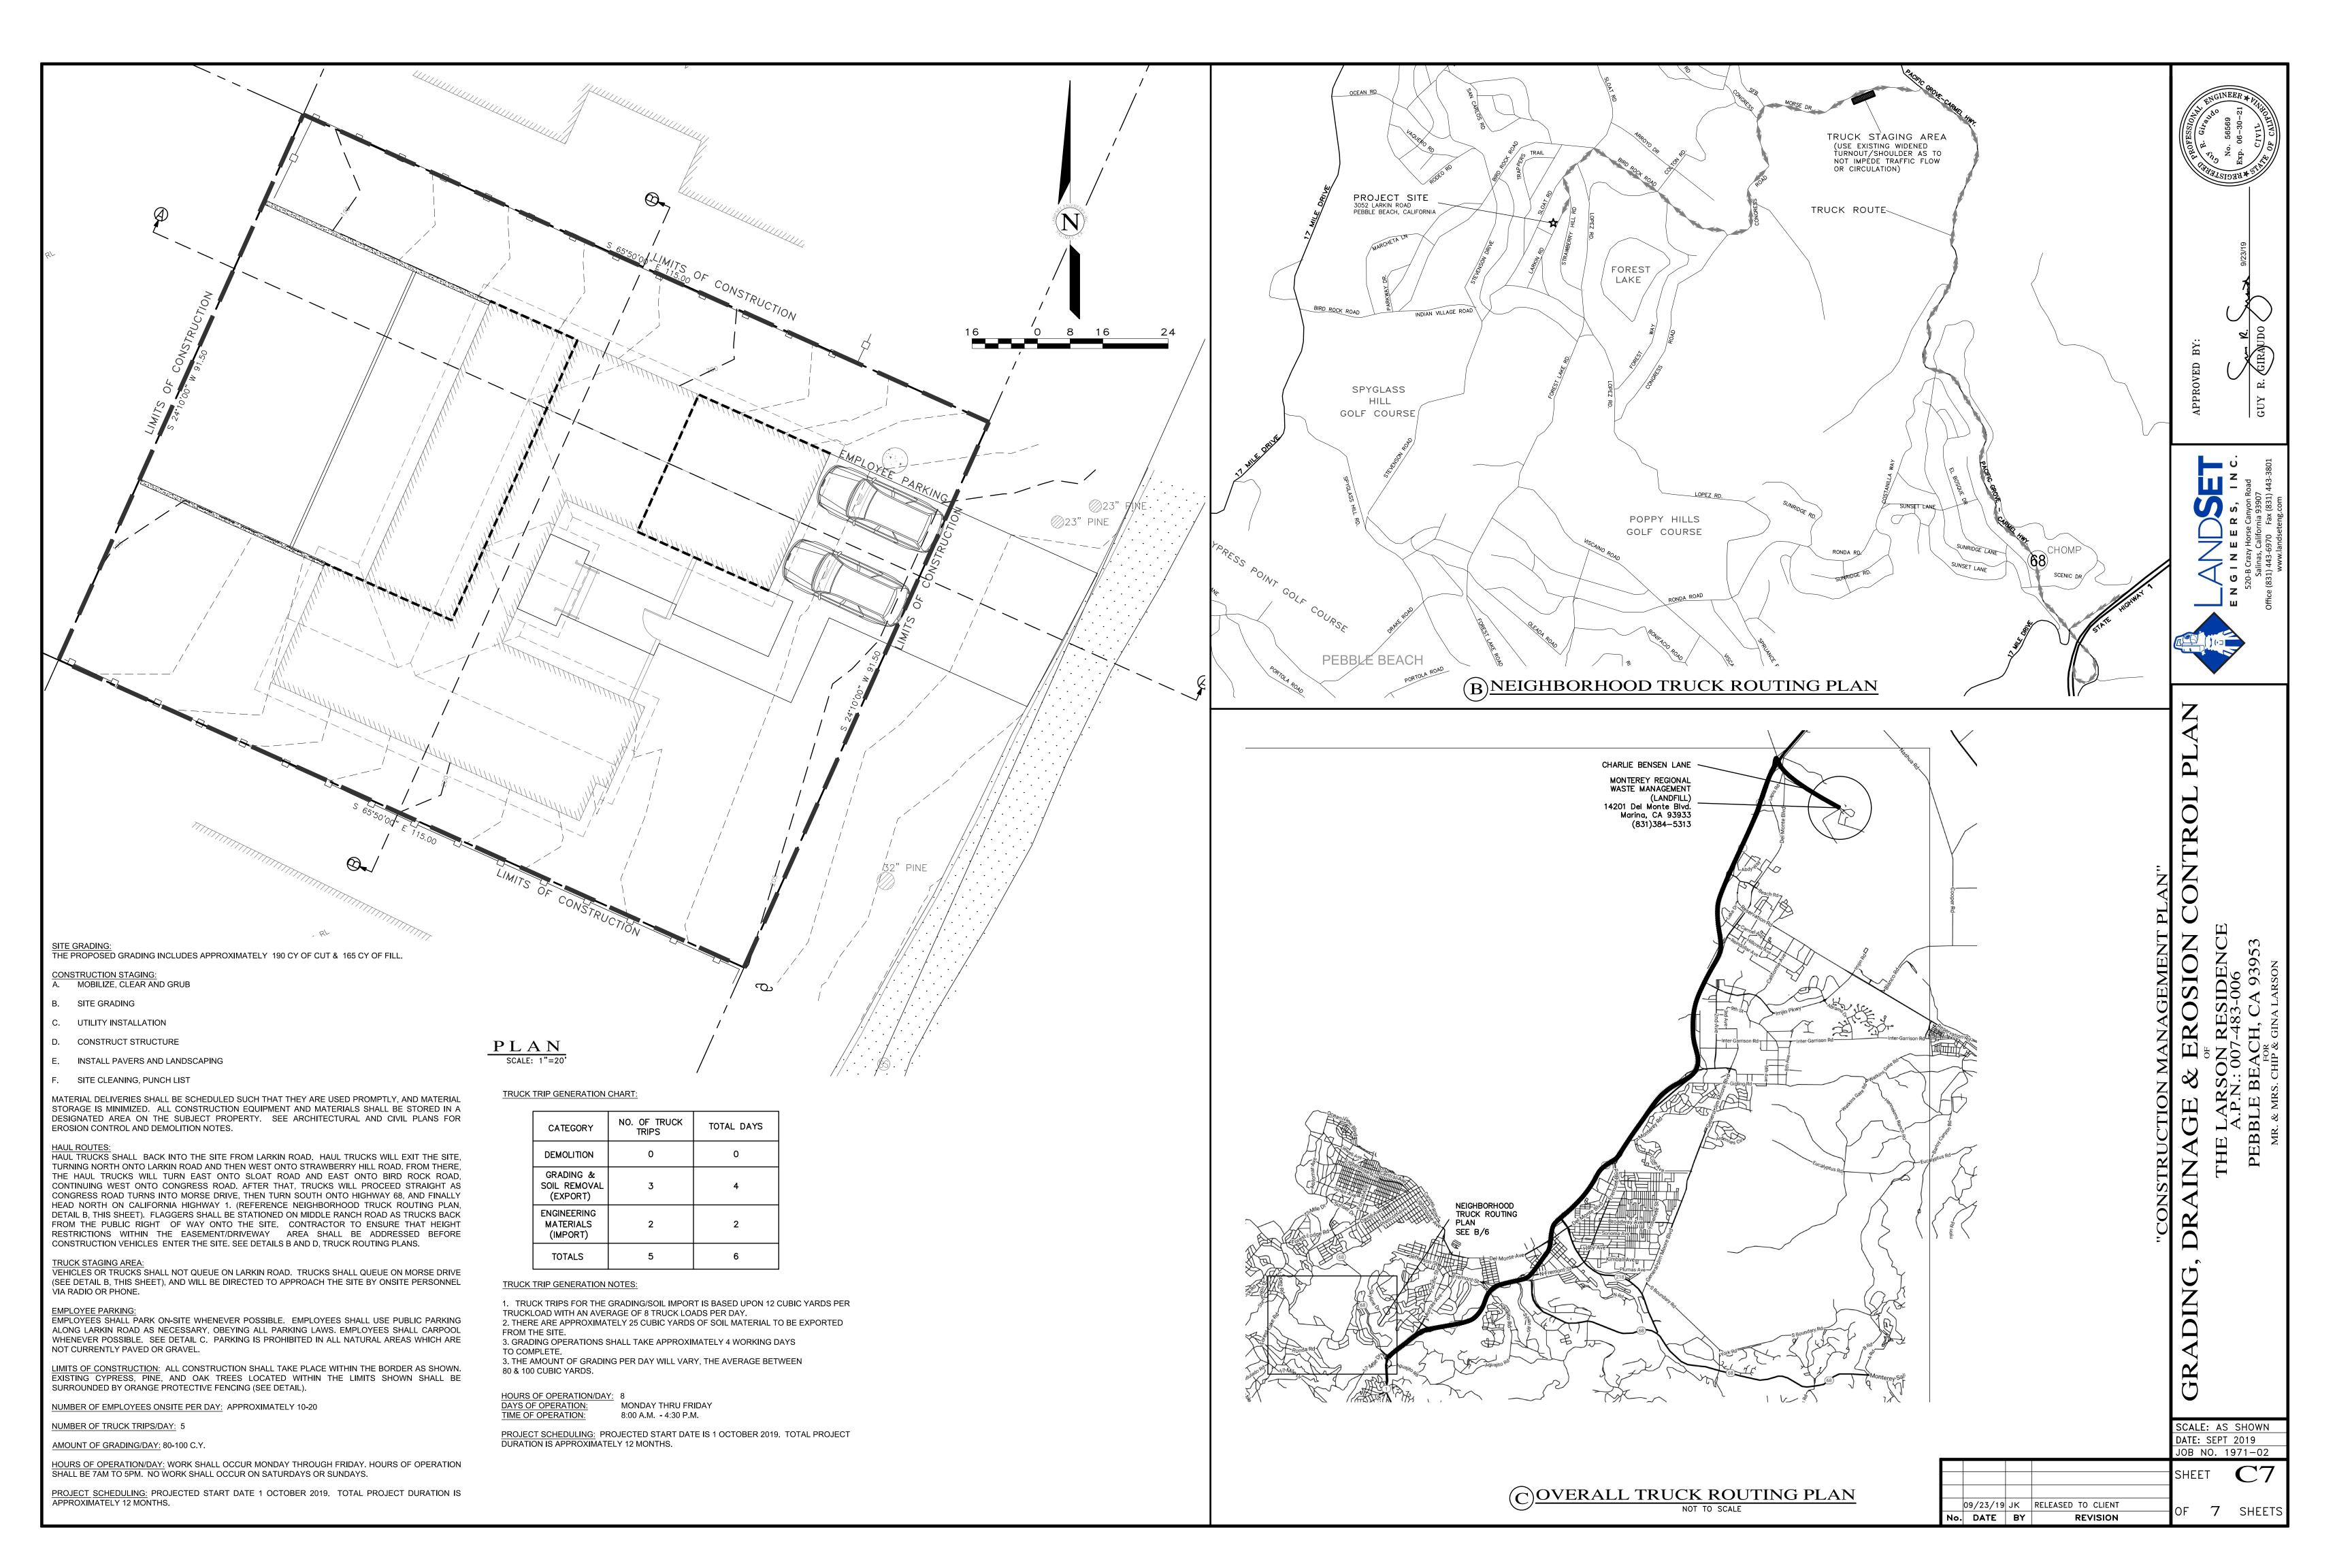

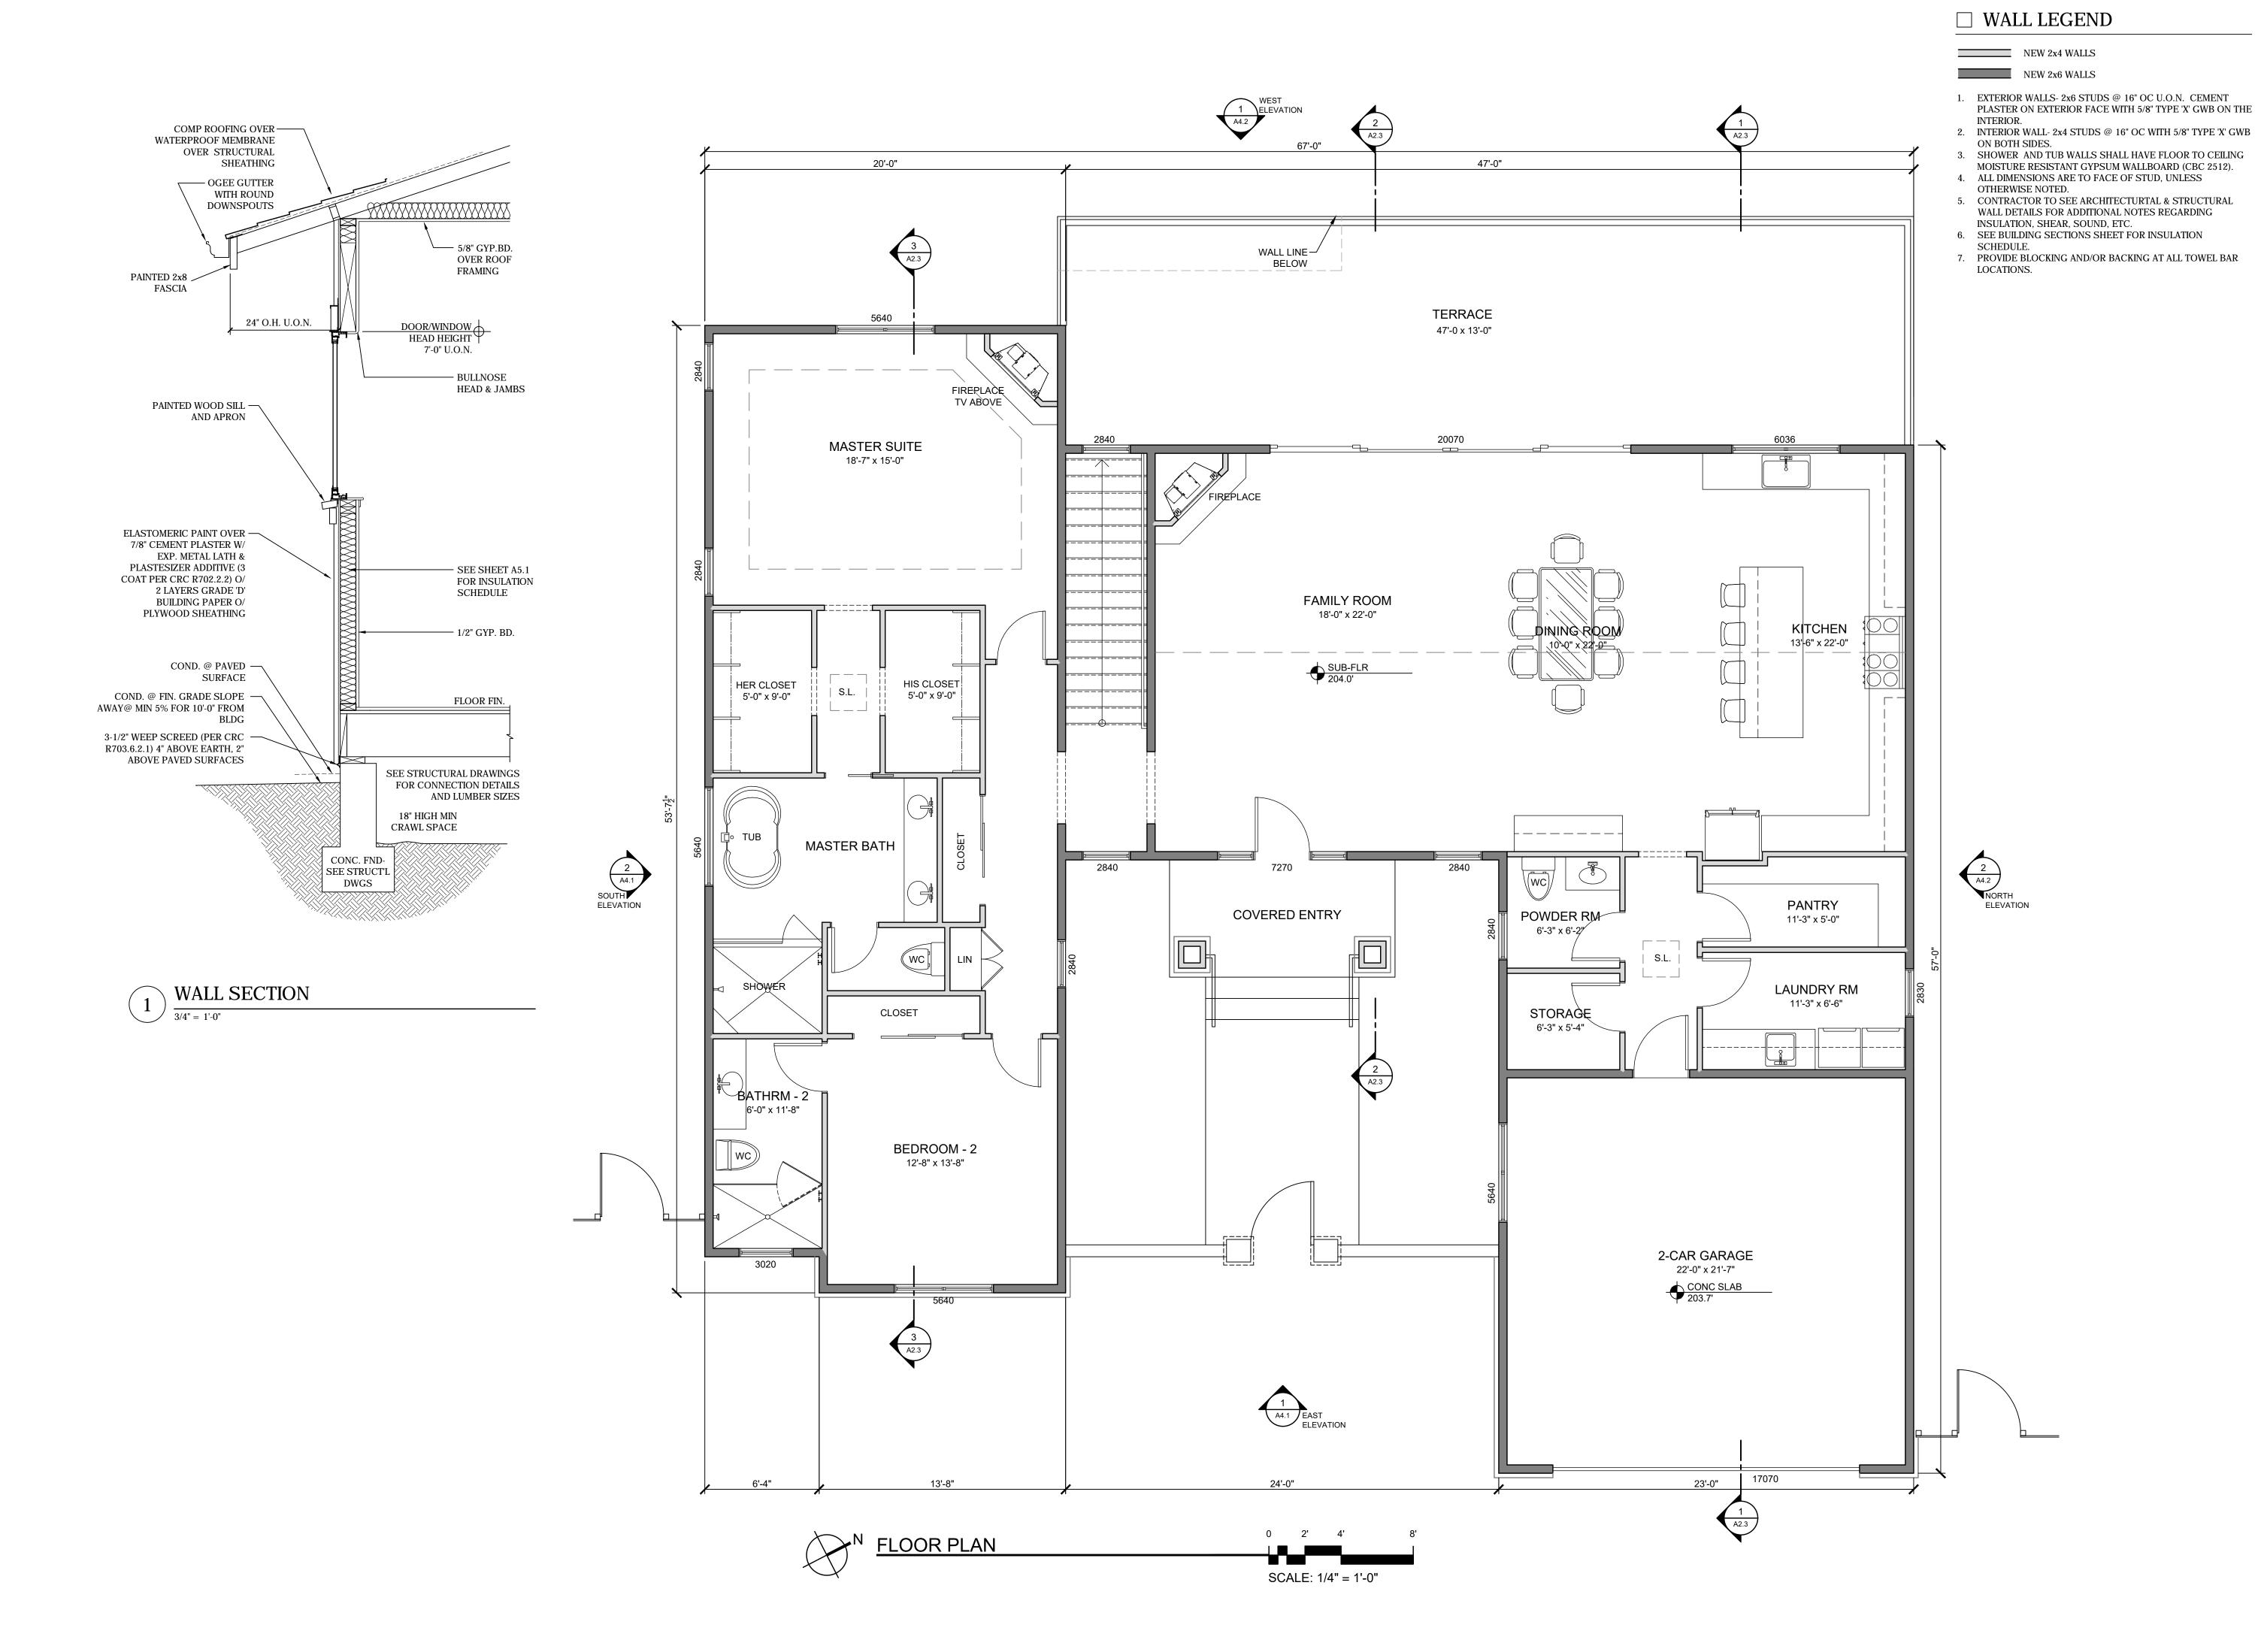


PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



DRAWING RECORD

DESCRIPTION ISSUED
PEBBLE BEACH SUBMITTAL 9-11-2019
COUNTY PLN SUBMITTAL 9-19-19

225 CANNERY ROW, SUITE i

831.642.9732 FAX 831.401.3292

john@mooredesign.org

MONTEREY CA. 93940

PRINT DATE: 9/18/2019

MEMBER
A
B
D
R

AMERICAN INSTITUTE of
BUILDING DESIGN

All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the acceptance of the restrictions.


Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale dimensions.

SHEET TITLE:

FLOOR PLAN

SHEET NUMBER:

A2.1

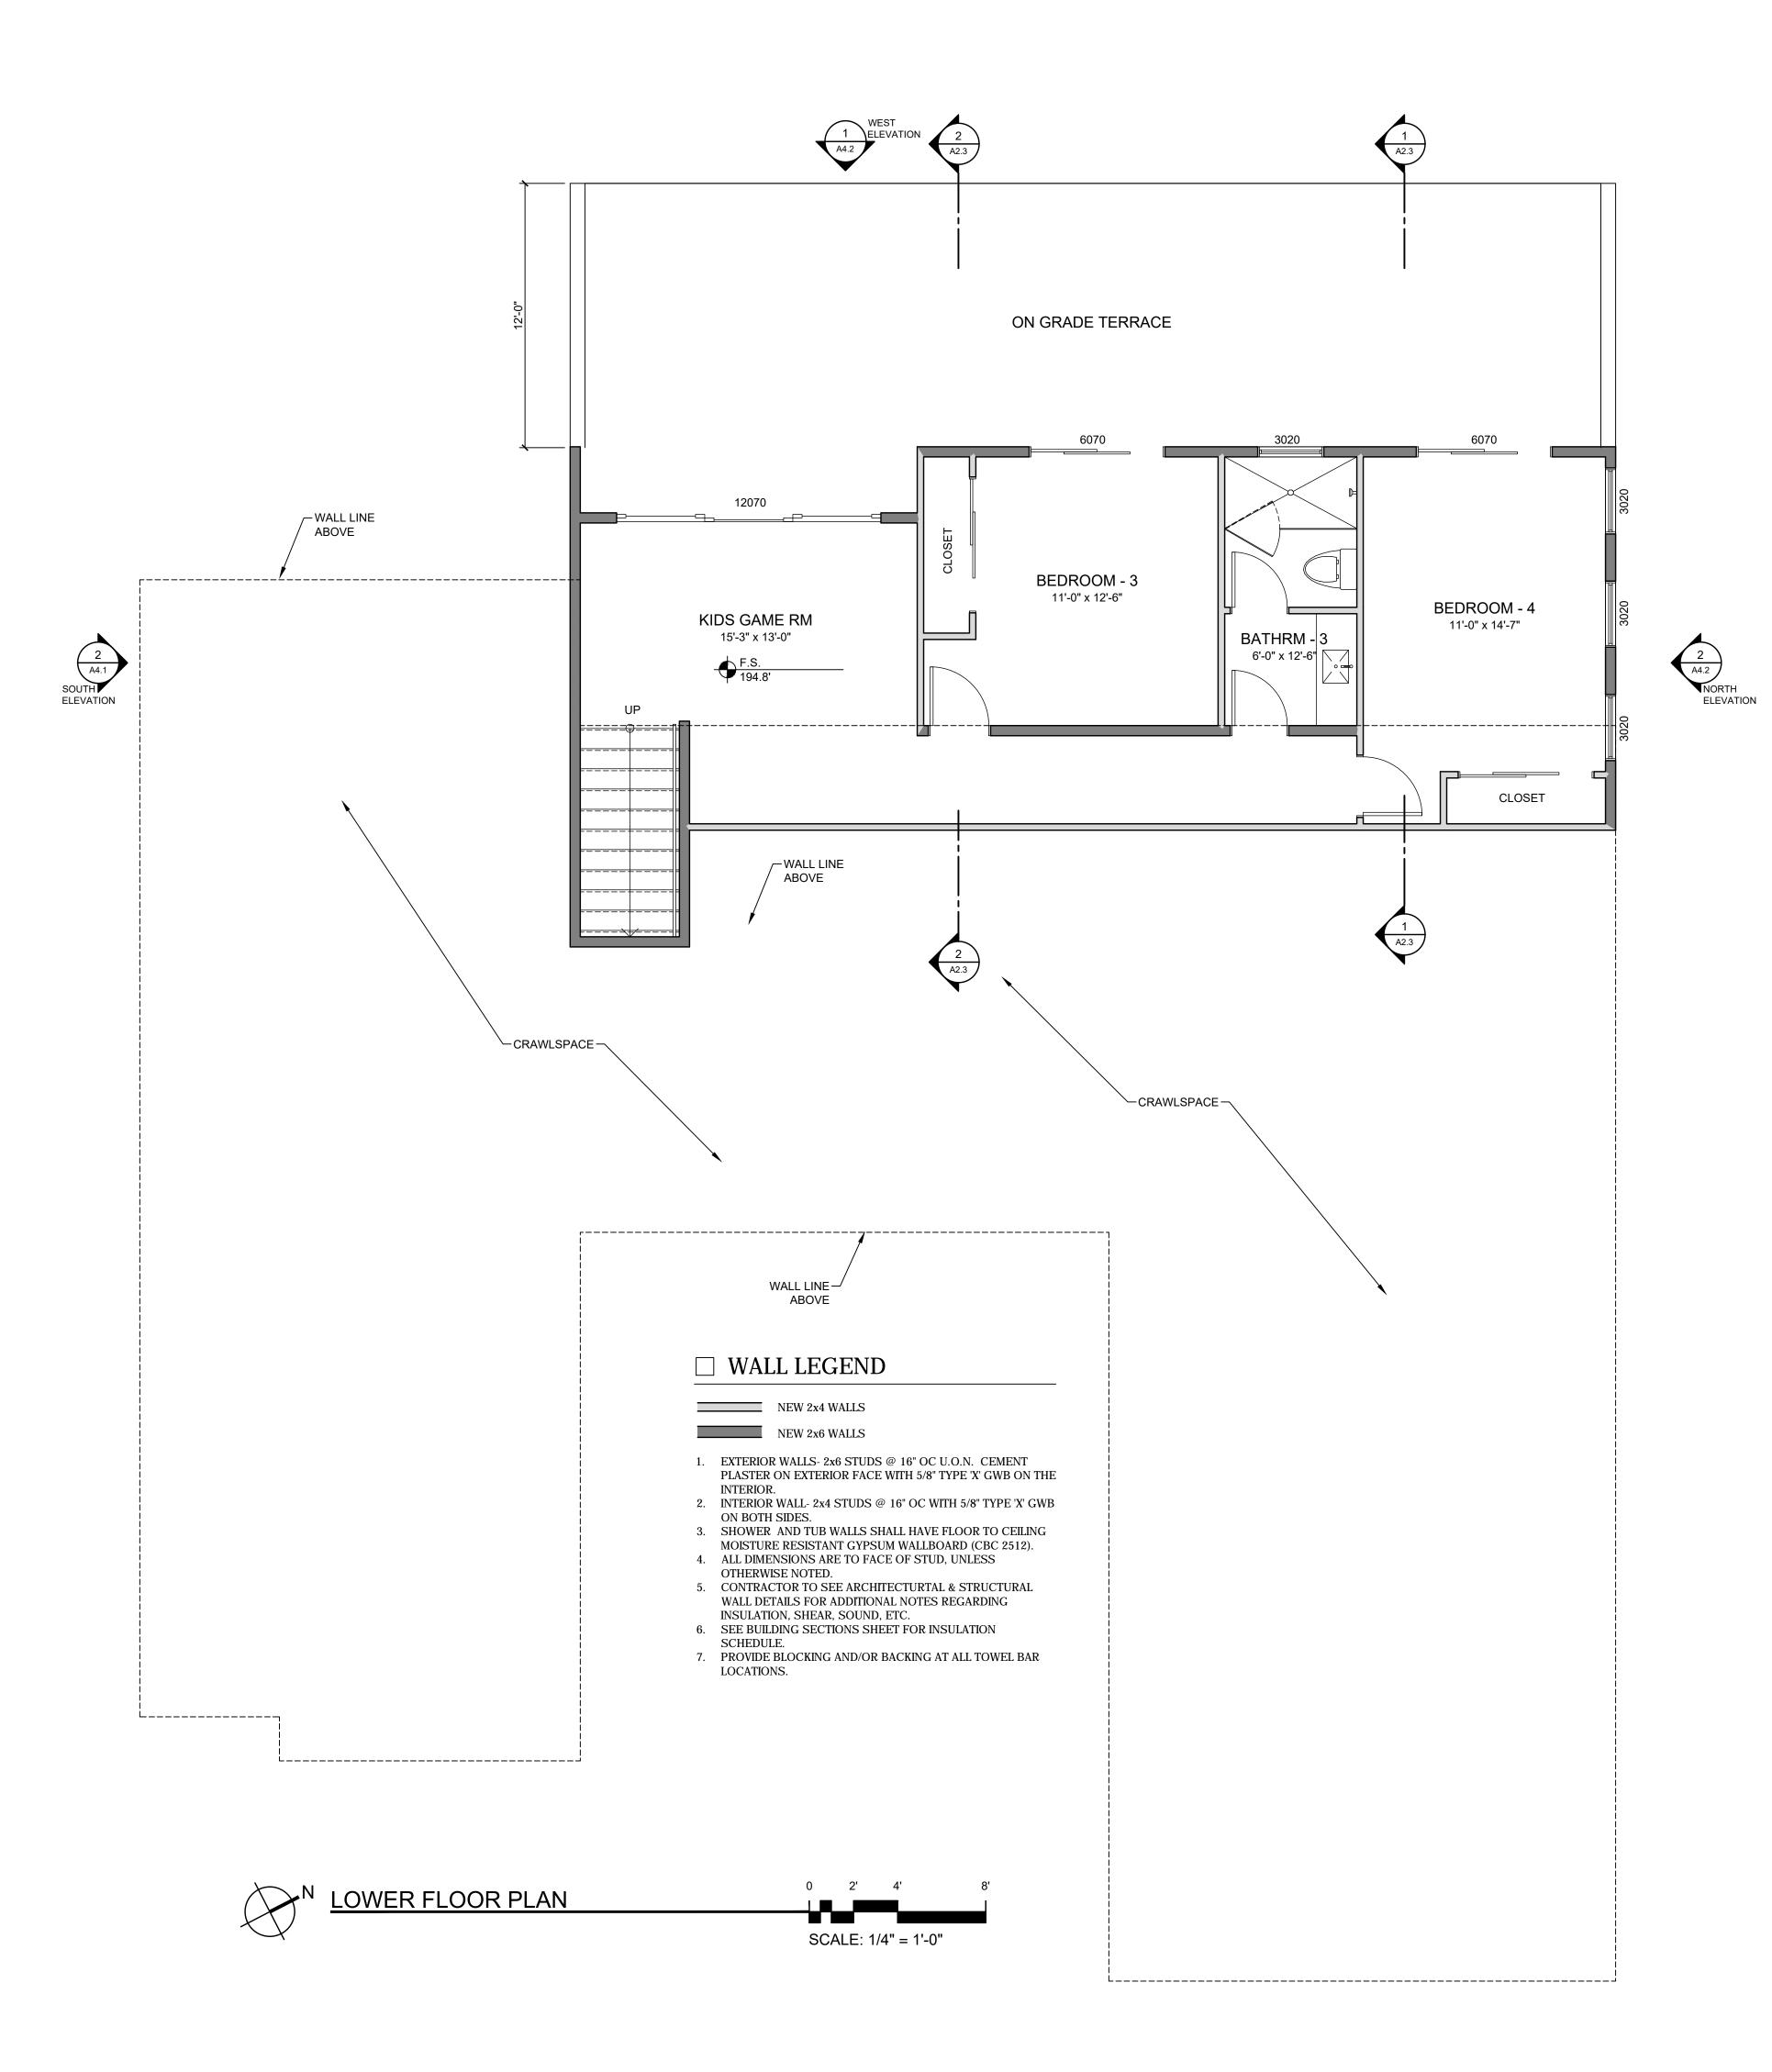

PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



MOORE DESIGN
RESIDENTIAL PLANNING &

CONSTRUCTION ADMINISTRATION

225 CANNERY ROW, SUITE i MONTEREY CA. 93940 831.642.9732 FAX 831.401.3292 john@mooredesign.org

DRAWING RECORD		
DESCRIPTION	ISSUED	
PEBBLE BEACH SUBMITTAL	9-11-2019	
COUNTY PLN SUBMITTAL	9-19-19	

PRINT DATE: 9/18/2019



AMERICAN INSTITUTE of BUILDING DESIGN

All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the

Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale dimensions.


acceptance of the restrictions.


SHEET TITLE:


LOWER FLOOR PLAN


SHEET NUMBER:


A2 2

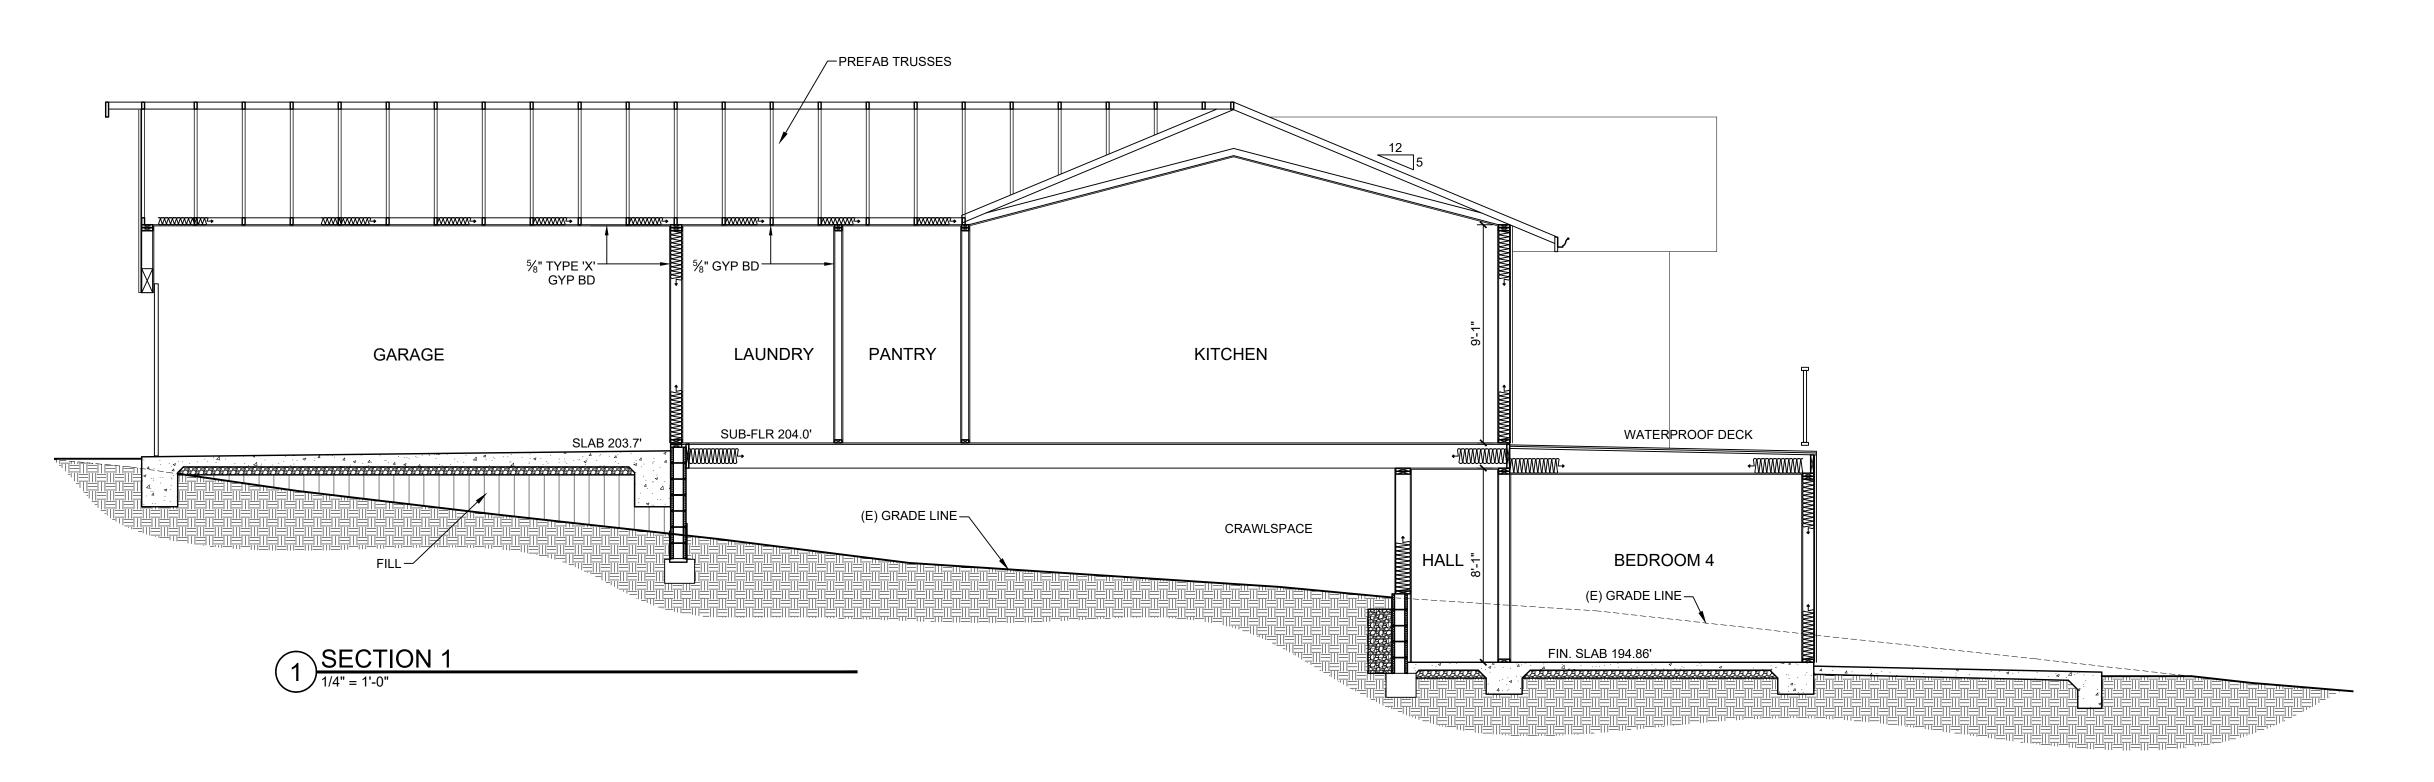

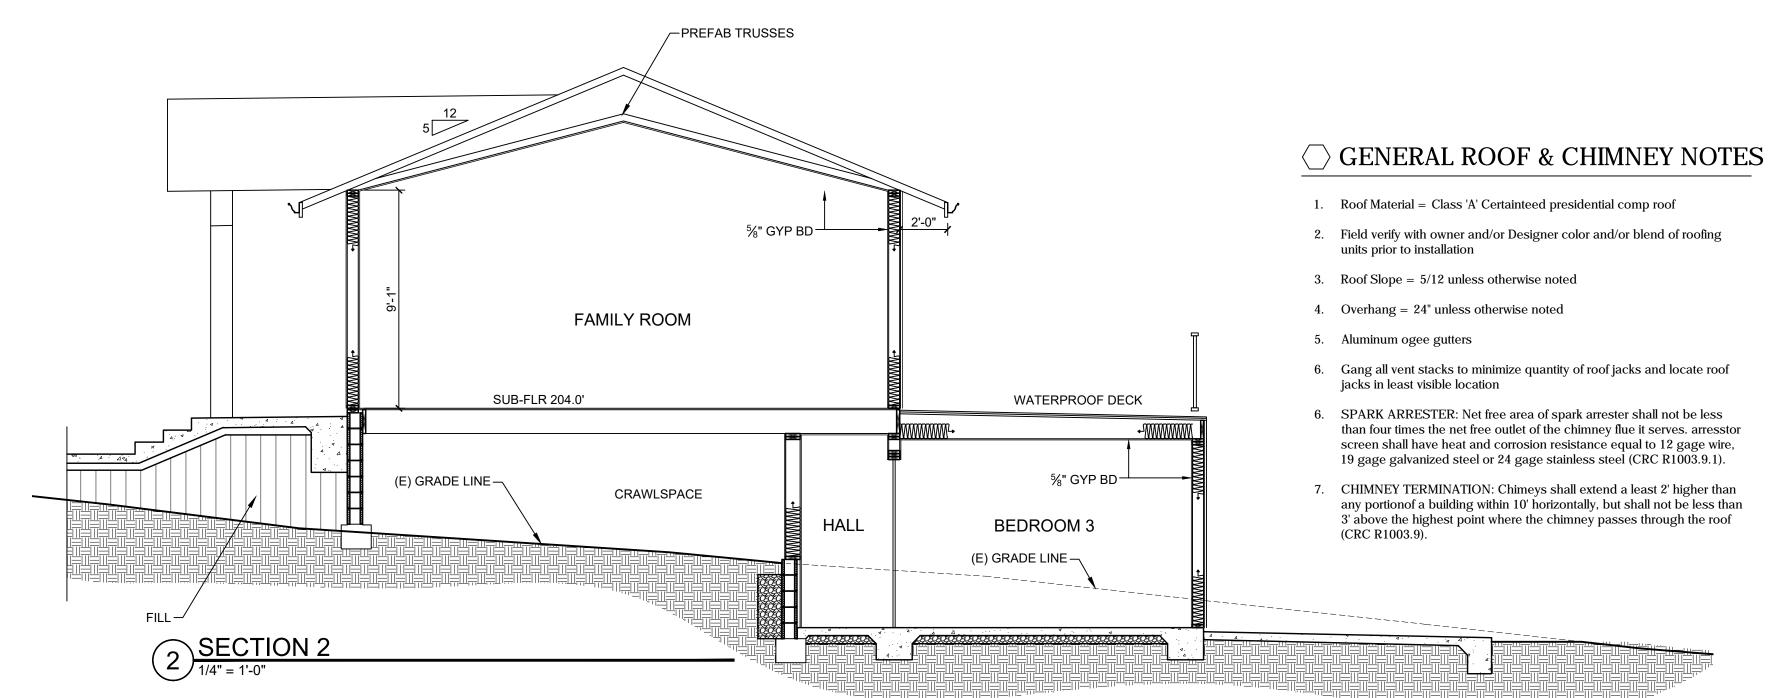

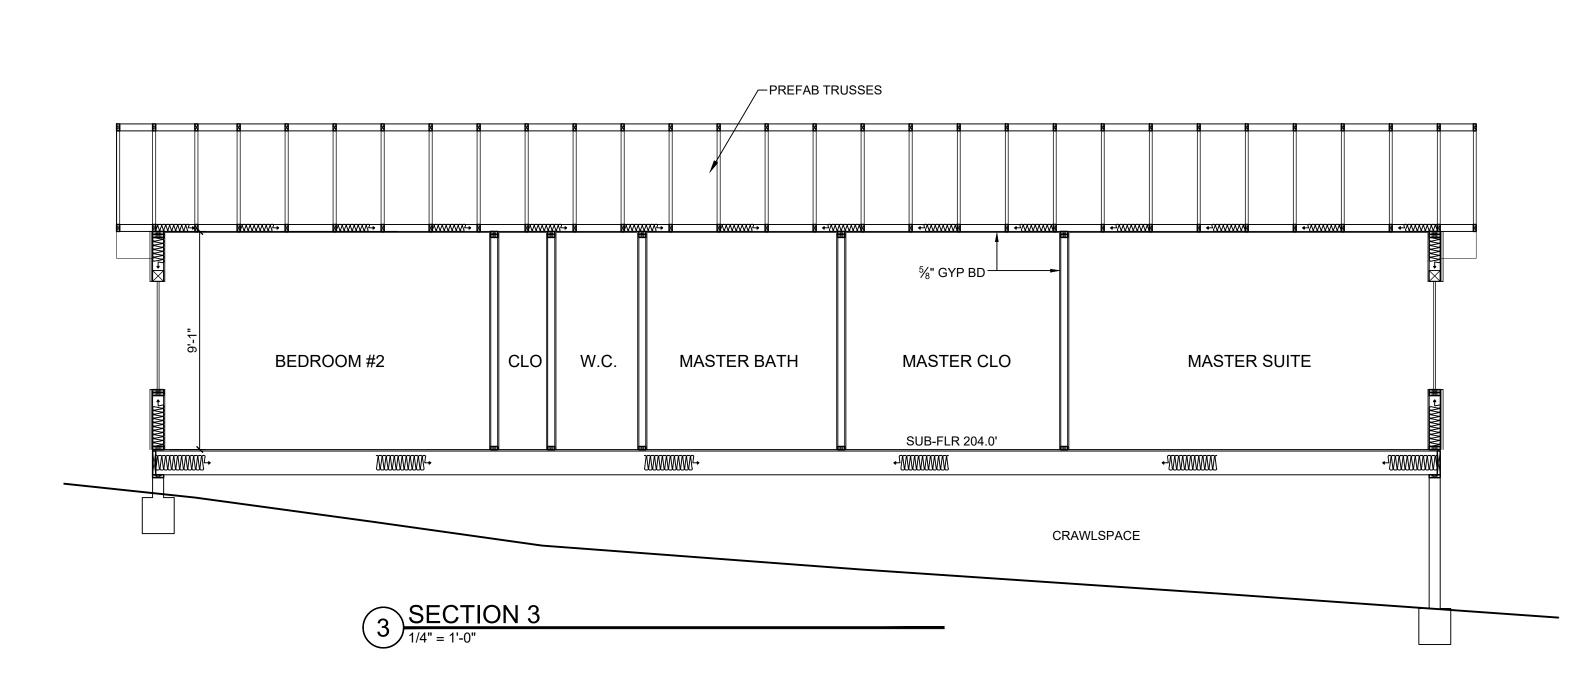

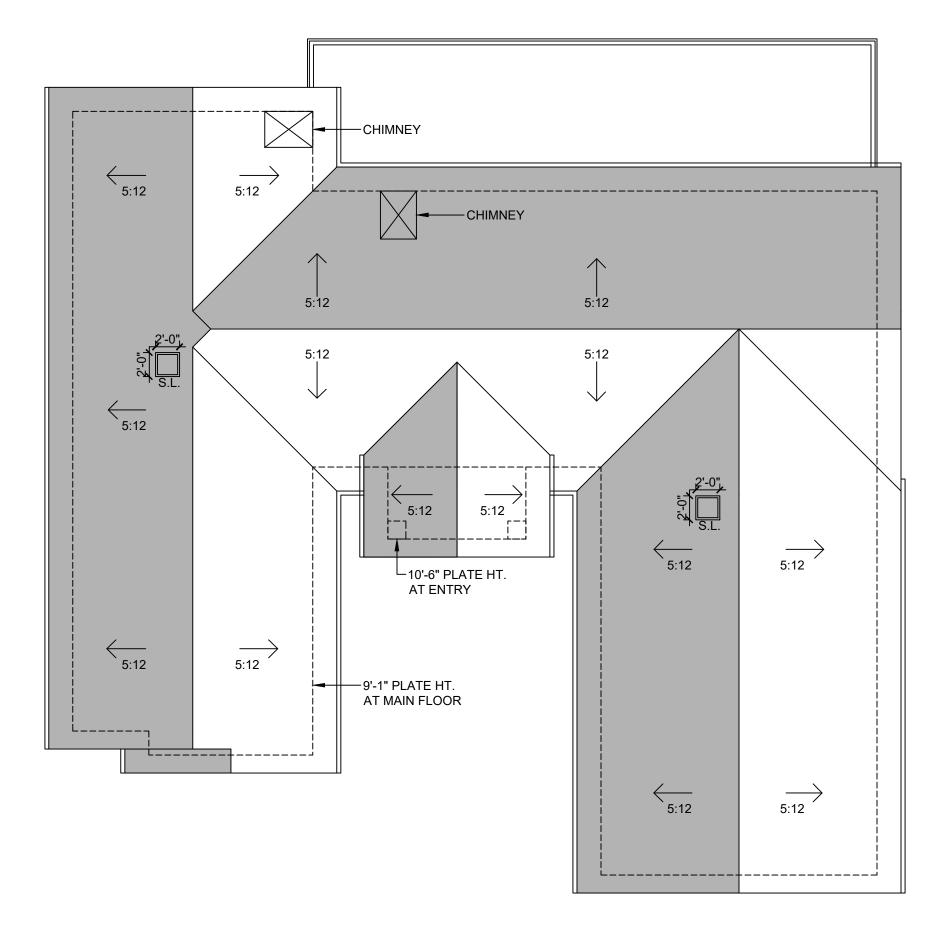




PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



RESIDENTIAL PLANNING & CONSTRUCTION ADMINISTRATION

225 CANNERY ROW, SUITE i MONTEREY CA. 93940 831.642.9732 FAX 831.401.3292 john@mooredesign.org

DRAWING RECORD		
DESCRIPTION	ISSUED	
PEBBLE BEACH SUBMITTAL	9-11-2019	
COUNTY PLN SUBMITTAL	9-19-19	

PRINT DATE: 9/24/2019



BUILDING DESIGN

All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the acceptance of the restrictions.

Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale

SHEET TITLE: **ROOF PLAN**


SHEET NUMBER:

A2.3



○ SHEET NOTES

- 1. ROOF CLASS 'A' CERTAINTEED PRESIDENTIAL SHAKE WEATHERWOOD
- 2. WALLS ELASTOMERIC PAINT OVER 7/8" CEM. PLASTER W/ EXP. METAL LATH & PLASTESIZER ADDITIVE (3 COAT PER CBC 2508.1) 0/2 LAYERS GRADE 'D' BLDG. PAPER.
- 3. STONE VENEER
- 4. WINDOWS TAN MILGARD VINYL DOUBLE PANE WINDOWS WITHOUT GRID
- 5. GUTTERS ALUMINUM OGEE GUTTERS
- 6. GUARDRAILS PAINTED WOOD BALUSTRADES AND TOP CAP

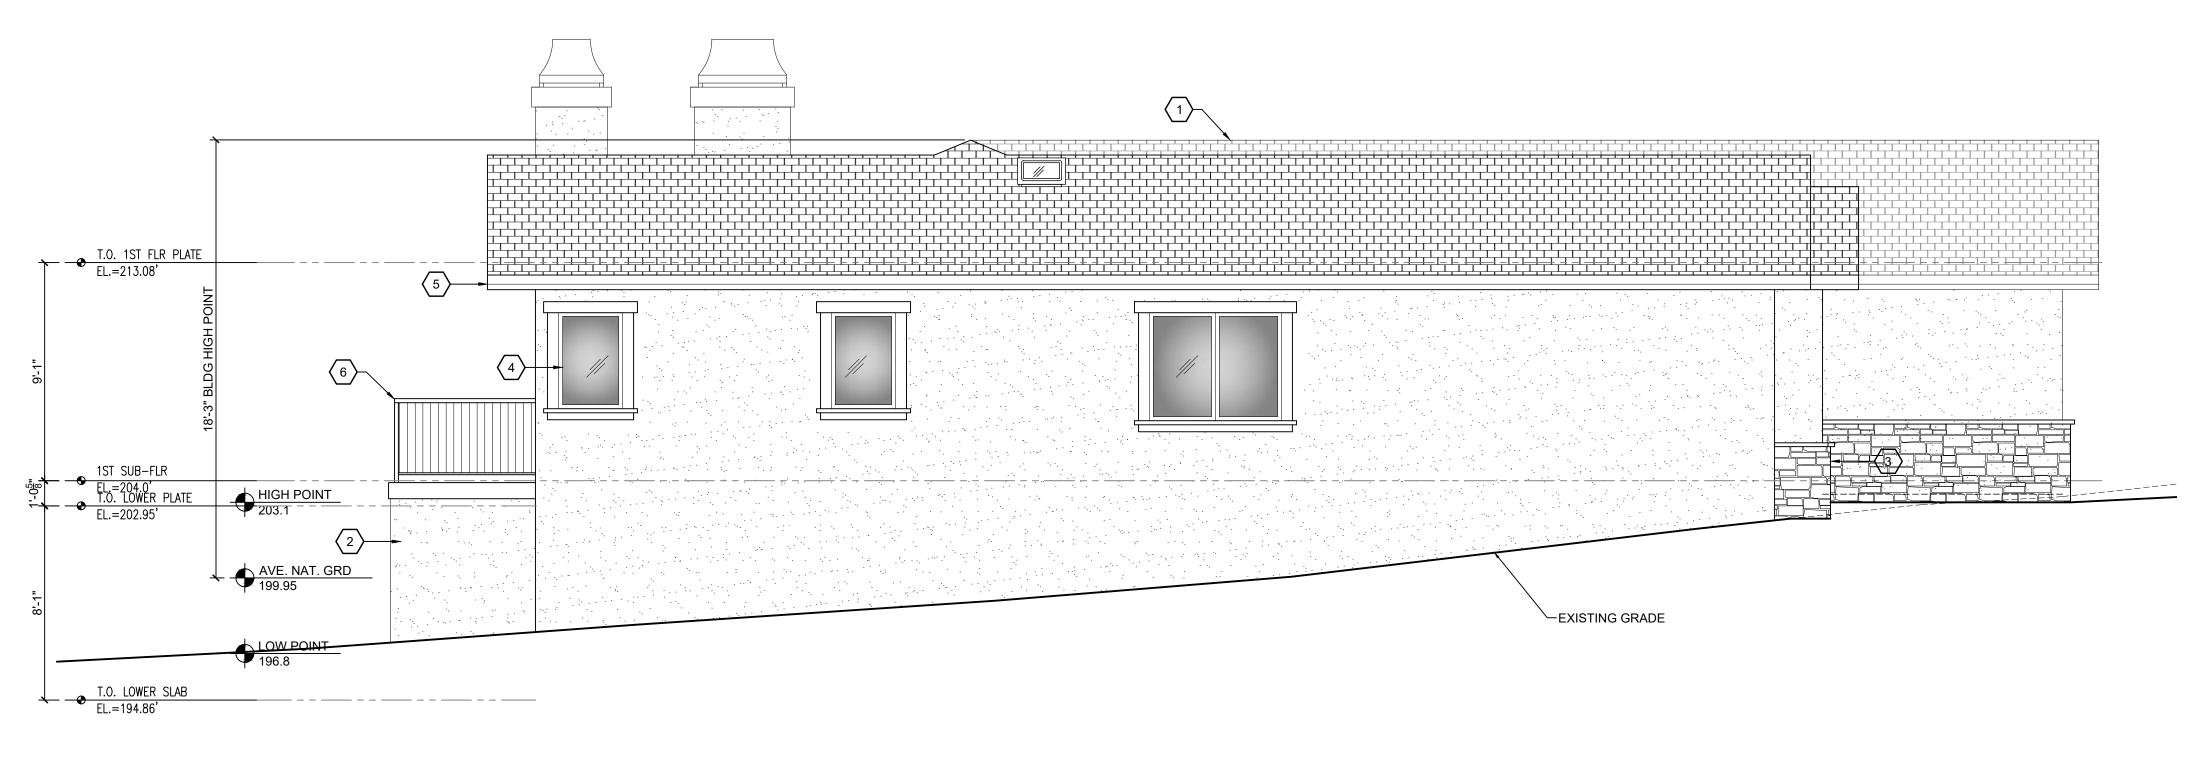

2 SOUTH ELEVATION


1/4" = 1'-0"

PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



225 CANNERY ROW, SUITE i MONTEREY CA. 93940 831.642.9732 FAX 831.401.3292 john@mooredesign.org

ISSUED 9-11-2019
9-11-2019
9-19-19

PRINT DATE: 9/18/2019



All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the acceptance of the restrictions.

Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale dimensions.

SHEET TITLE:
ELEVATIONS


SHEET NUMBER:

A4.1



○ SHEET NOTES

- 1. ROOF CLASS 'A' CERTAINTEED PRESIDENTIAL SHAKE WEATHERWOOD
- 2. WALLS ELASTOMERIC PAINT OVER 7/8" CEM. PLASTER W/ EXP. METAL LATH & PLASTESIZER ADDITIVE (3 COAT PER CBC 2508.1) 0/2 LAYERS GRADE 'D' BLDG. PAPER.
- 3. STONE VENEER
- 4. WINDOWS TAN MILGARD VINYL DOUBLE PANE WINDOWS WITHOUT GRID
- 5. GUTTERS ALUMINUM OGEE GUTTERS
- 6. GUARDRAILS PAINTED WOOD BALUSTRADES AND TOP CAP

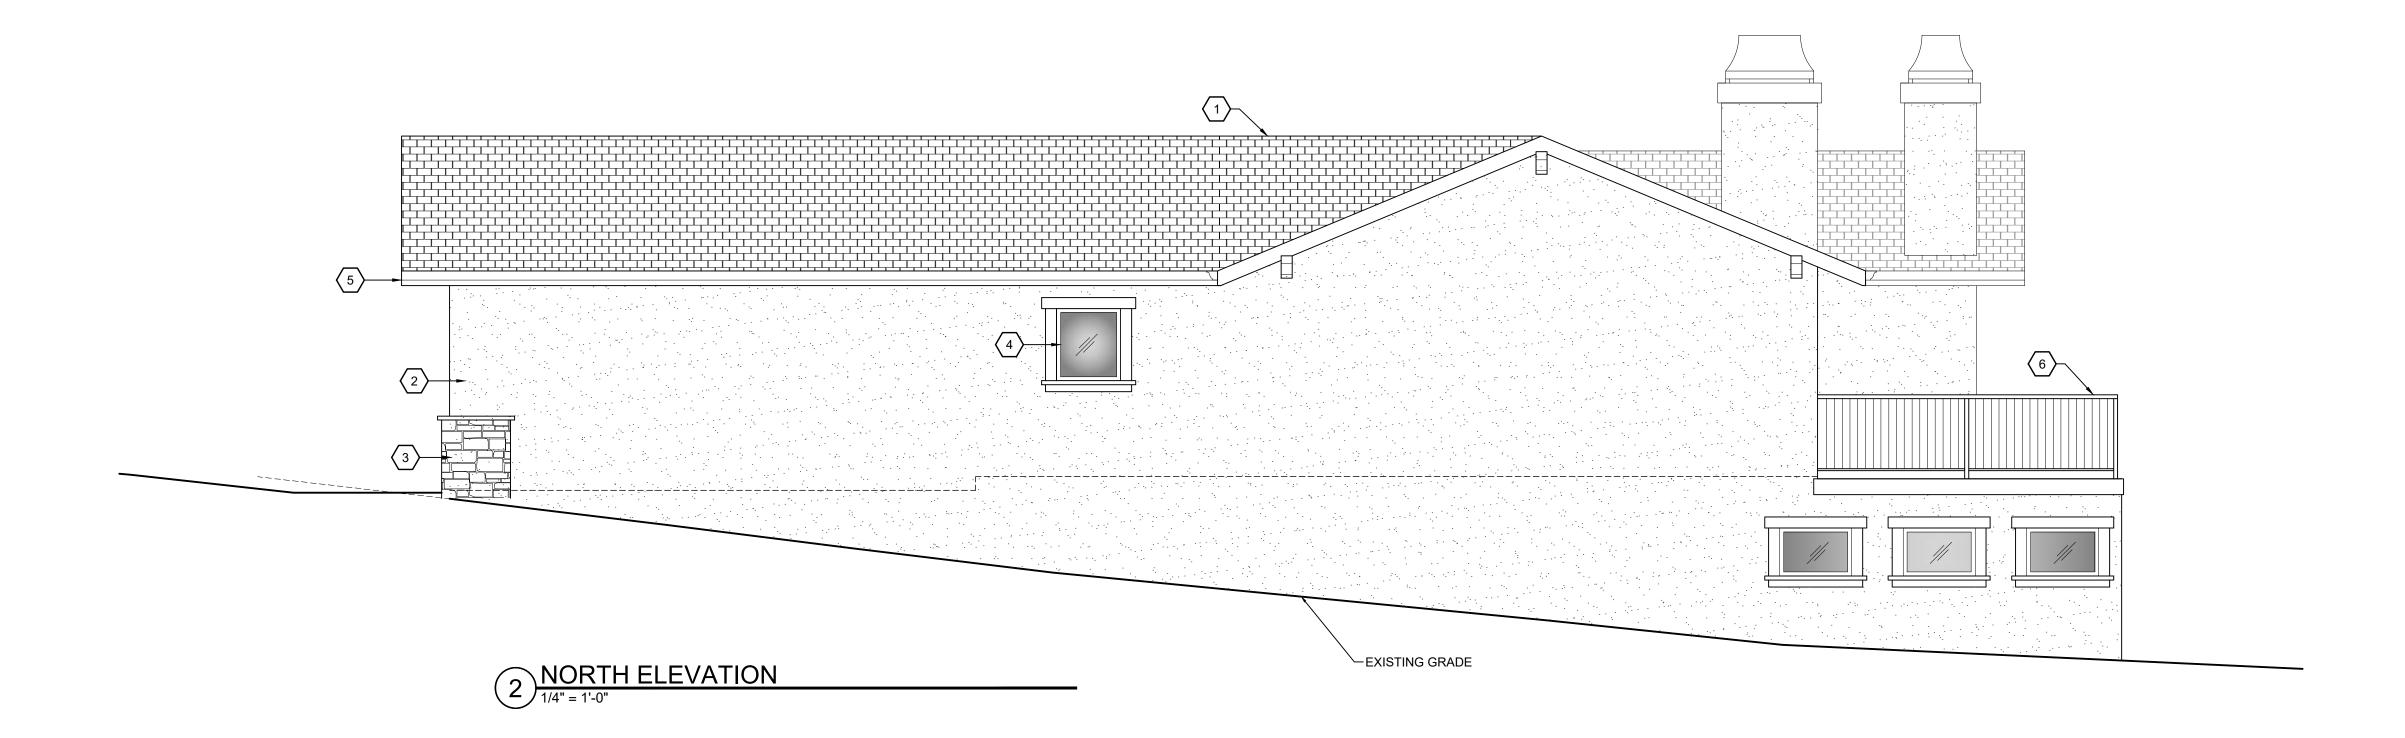

PROJECT NAME:

LARSON RESIDENCE

3052 LARKIN ROAD PEBBLE BEACH, CA 93953

APN: 007-483-006-000



CONSTRUCTION ADMINISTRATION

225 CANNERY ROW, SUITE i

MONTEREY CA. 93940
831.642.9732 FAX 831.401.3292

john@mooredesign.org

DRAWING RECORD		
DESCRIPTION	ISSUED	
PEBBLE BEACH SUBMITTAL	9-11-2019	
COUNTY PLN SUBMITTAL	9-19-19	

MEMBER

9/18/2019

PRINT DATE:

A D

AMERICAN INSTITUTE of BUILDING DESIGN

All ideas, designs, arrangements and plans indicated by this drawing are owned by, and the property of Moore Design, LLC. The use of these plans and specifications is restricted to the original site for which they were prepared, and publication thereof is expressly limited to such use. Re-use, reproduction or publication by any method in whole or in part is prohibited. Title to the plans and specifications remains with Moore Design, LLC., and visual contact with them constitutes prima facie evidence of the acceptance of the restrictions.


Drawings are not to be scaled. Written dimensions on these drawings shall have precedence over scale dimensions.

SHEET TITLE:

ELEVATIONS

SHEET NUMBER:

A4 2

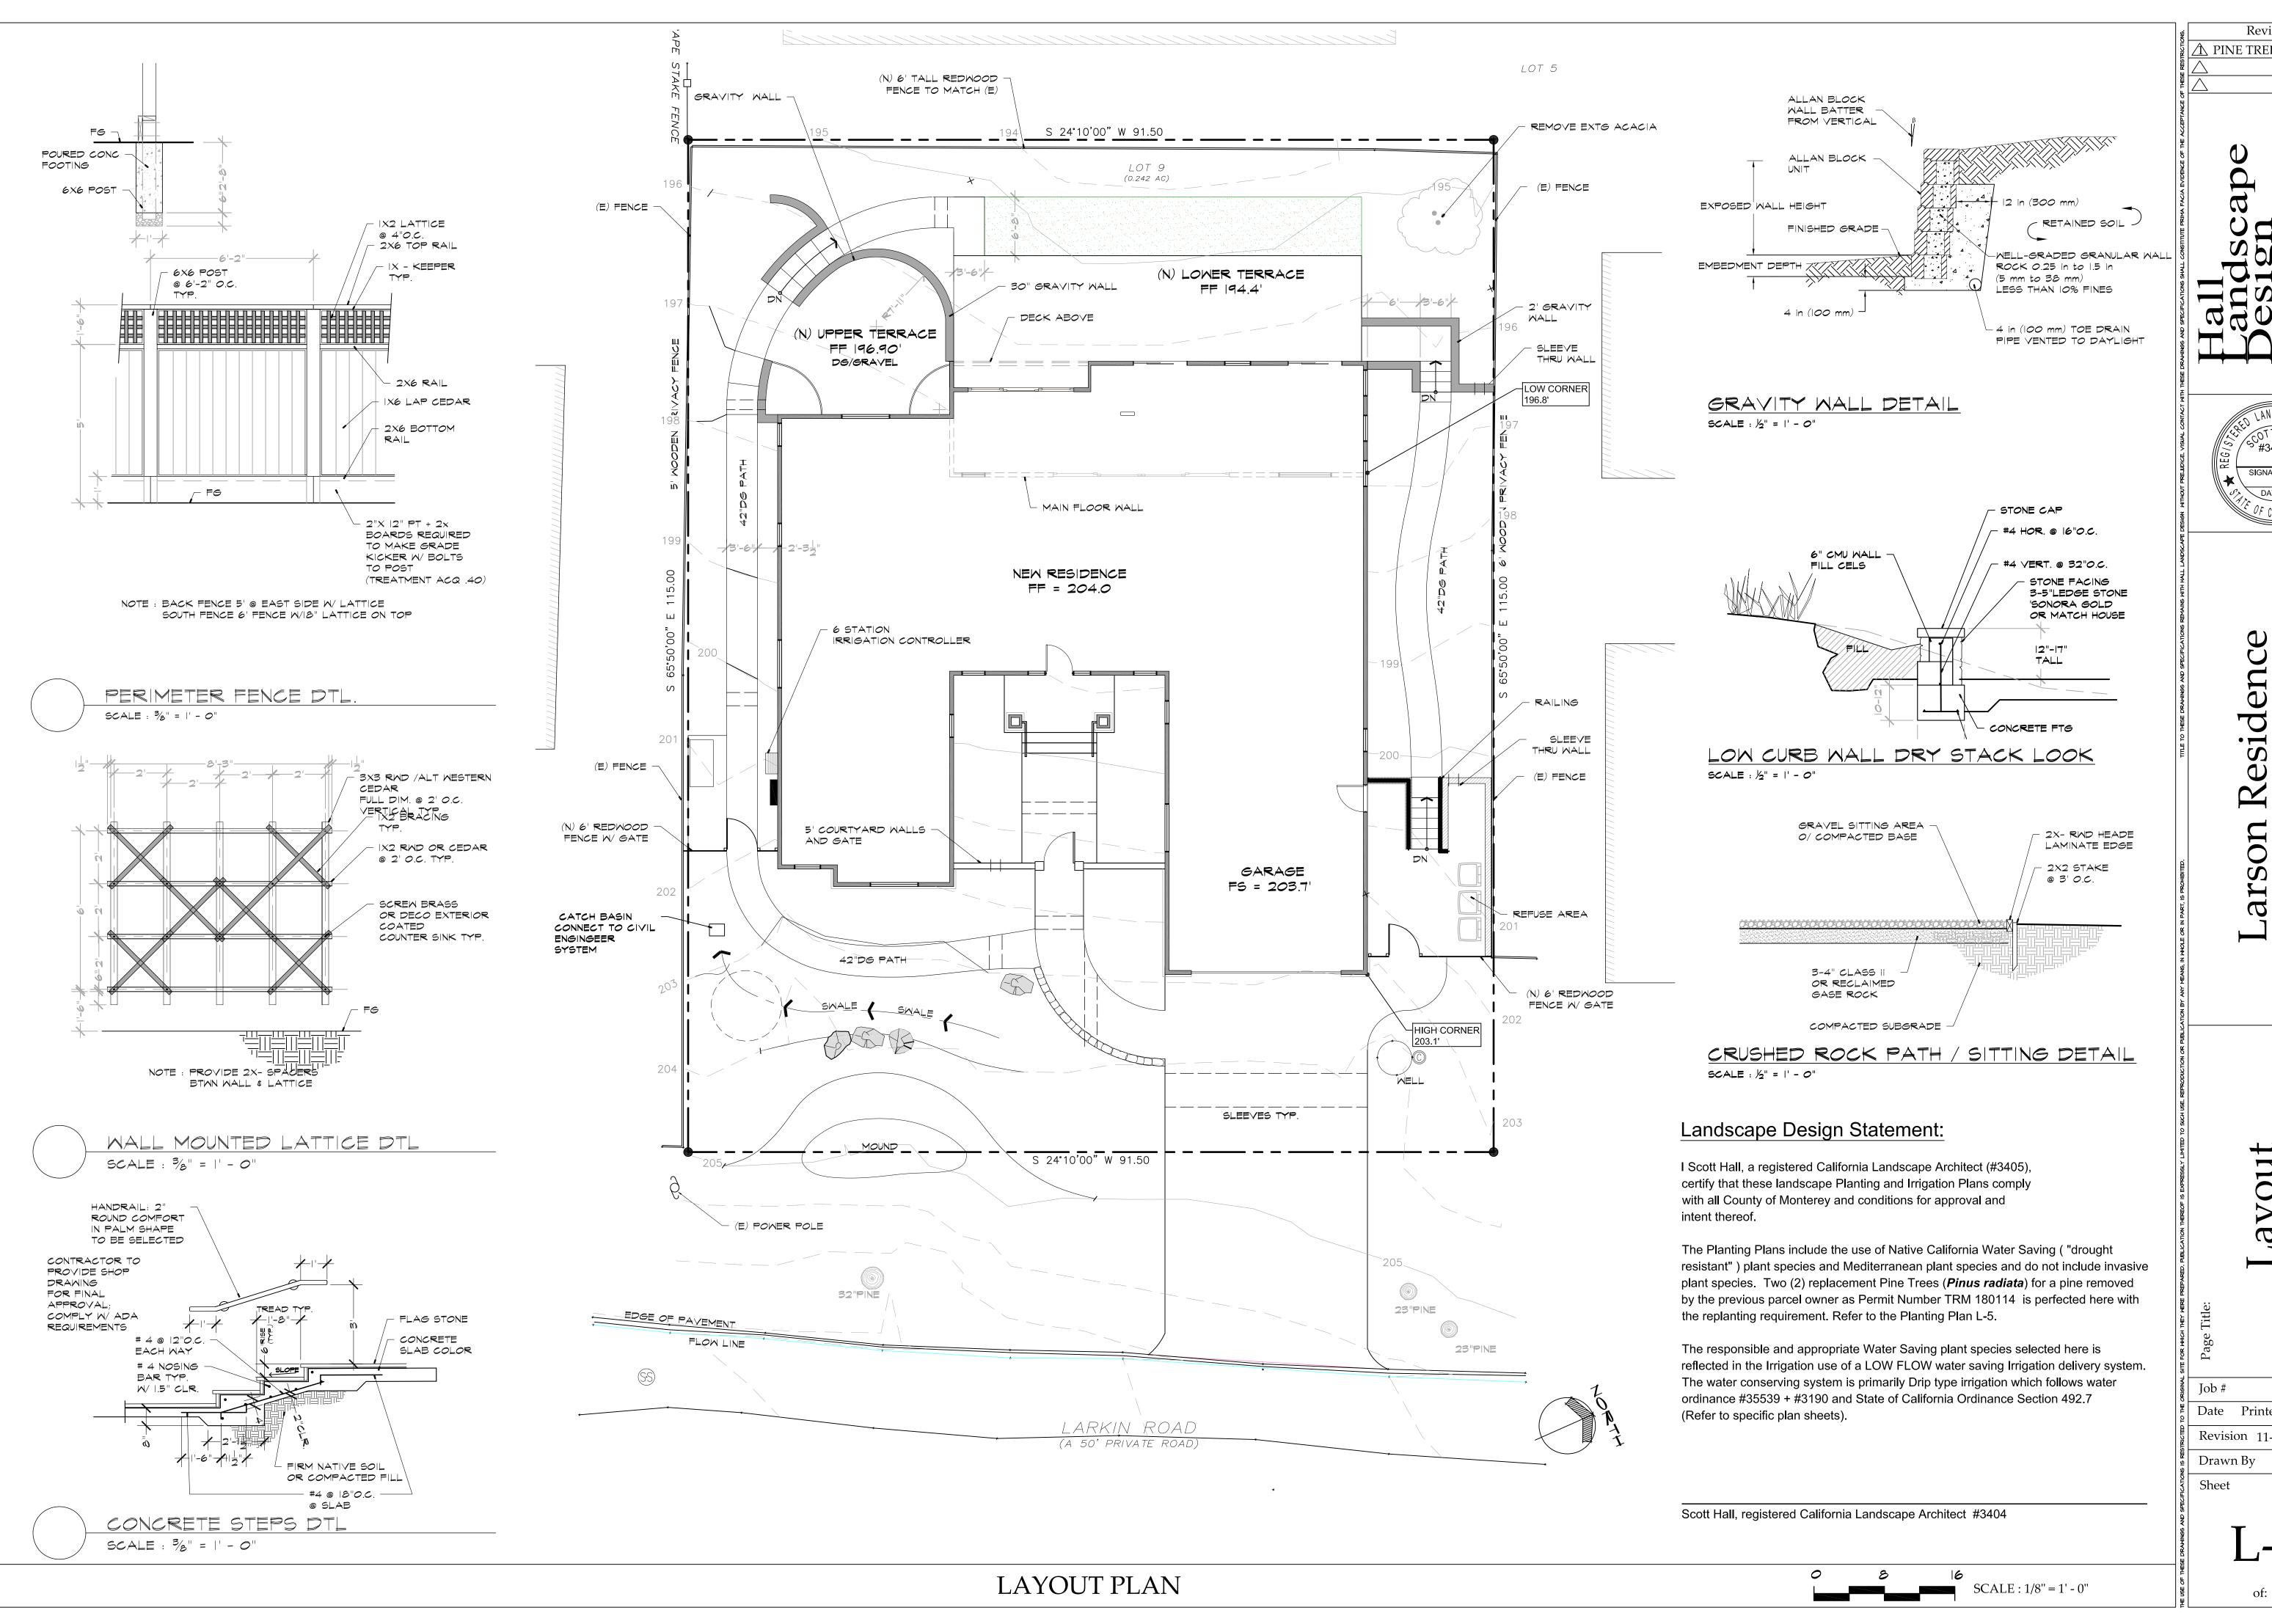

Revisions \ PINE TREE REPLANTING



en oad 007 7 apn Si 3052 Beach

ayout

Pebble

192019 Date Printed: 11-29-2019

Revision 11-26-2019

Drawn By MASH

> ____ of: 6 Sheets

#4 315 sf (N) LOWER TERRACE #6 FF 194.4' (N) UPPER TERRACE FF 196.90' dg/gravel ADJACENT RESIDENCE ADJACENT RESIDENCE NEW RESIDENCE FF = 204.0 /- 6 STATION IRRIGATION CONTROLLER DRIP LINE TEC LINE 101 sf BACK UP GENERATOR MASTER VALVE GARAGE FS = 203.7' CATCH BASIN -CONNECT TO CIVIL ENGINGEER SYSTEM PRESSURE TANKS NEW SUBGRADE WATER TANK MELL HEAD FEED PIPE TO TANK DRIP (E) POWER POLE 23"PINE TOTAL PLANTED AREAS = 1,589 sf

WATER EFFICIENT LANDSCAPE WORKSHEET

Reference Evapotranspiration (ETo) _____38.96

Hydrozone # /Planting Description ^a	Plant Factor (PF)	Irrigation Method ^b	Irrigation Efficiency (IE) ^c	ETAF (PF/IE)	Landscap e Area (sq, ft,)	ETAF x Area	Estimated Total Water Use (ETWU) ^e
Regular Landsca	pe Areas						Gallons
ZONE #1	.3	Tecline	.81	.37	195	72.15	1,742.80
ZONE #2	.3	Tecline	.81	.37	264	97.68	2,359.50
ZONE #3	.3	Drip	.81	.37	472	174.64	4,218.50
ZONE #4	.3	Drip	.81	.37	379	140.23	3,387.30
ZONE #5	.3	Drip	.81	.37	168	62.16	1,501.50
ZONE #6	.3	Tecline	.81	.37	111	41.07	992
				Totals	1,589	587.93	
		s	ETWU Total		14,202		
			Maximum Allowed Water Allowance (MAWA)			21,110	

*Hydrozone #/Planting	bIrrigation Method	^c Irrigation	<i>^dETWU</i> (Annual Gallons
Description	Efficiency		Required) = $Eto \times 0.62 \times ETAF \times$
E.g			Area
2.) low water use plantings	DRIP	0.81	where 0.62 is a conversion

factor that converts acreinches per acre per year to gallons per square foot per year.

ETAF Calculations

Regular Landscape Areas

Total ETAF x Area	(B)
Total ETAL XAICA	(5)
Total Area	(A)
Average ETAF	B÷A

Average ETAF for Regular Landscape Areas must be 0.55 or below for residential areas This garden fully complies with the requirement

Total Area	(A+C)
Sitewide ETAF	(B+D) ÷ (A+C)

*MAWA (Annual Gallons Allowed) = (Eto) (0.62) [(ETAF x LA) + ((1-ETAF) x SLA)] where 0.62 is a conversion factor that

converts acre-inches per acre per year to

gallons per square foot per year, LA is the total landscape area in square feet, SLA is the total special landscape area in square

LANDSCAPE WATER USE STATEMENT

I Scott Hall, a registered California Landscape Architect (#3405) have followed the California Model Ordinance section 492.7 for this project and have complied with the criteria of the ordinance and applied them accordingly for the efficient use of water in the irrigation design plan.


Project Plant List:

	Project Plant List:		
SYMBOL	PLANT SPECIES	PLANT FACTOR	SIZE
T-1	Arbutus 'Marina'	0.3	24 Box
	Quercus agrifolia	0.1	
	Arbutus Marina	0.3	
T-2	Cedrus deodara	0.3	24 Box
HS-1	Prunus Iyonii	0.3	5 gallon
	Pittosporum tenuiforium	0.4	
	Cupressus macrocarpa	0.4	
LS-1	Drymis winterii	0.4	5 gallon
	Pittosporum undulatum	0.3	
LS-2	Agonis flexuosa 'After Dark' stk	0.3	5 gallon
FS-1	lochroma ccyanea 'Sky King'	0.4	5 gallon
	Tibochina heteromeles	0.4	
	Rhododendron 'Anah Karushke'	0.4	
FS-2	Lecospermum cordifolia 'Don's Red'	0.3	5 gallon
FS-3	Leucodendron 'salignum silvan Red'	0.3	5 gallon
FS-4	Leucodendron 'Gold Strike'	0.3	5 gallon
S-1	Choysia ternata	0.4	5 gallon
S-2	Rhamnus 'San Bruno'	0.3	5 gallon
	Callistomen 'Johnsonii Dwarf'	0.3	
S-3	Westringia 'Mundi'	0.3	5 gallon
S-4	Rosmarinus 'Tuscan Blue'	0.3	5 gallon
	Myrtus communis 'Dwarf'	0.3	
S-5	Camellia 'Shi Shi Gashura'	0.4	5 gallon
P -1	Anagozanthos flavins 'Big Red'	0.3	1 gallon
P-2	Lavendula 'Stoches'	0.3	1 gallon
P-3	Helleborus orientalis 'Pretty Ellen' purple	0.3	1 gallon
G-1	Lomandra longifolia 'Breeze'	0.3	1 gallon
	Lomandra confirta 'Platnum'		
GC-1	Arctostaphylos edmundsii 'Carmel Sur'	0.3	
GC-2	Lithadora densiflora 'Grace Ward'	0.4	1 gallon
	Teucrium majorium carsonii		
ESP	Camellia 'Ta Ta'	0.5	
	Grewia cafra		
V-1	Tecomeria capensis	0.04	1 gallon
V-2	Bougainvillea 'Barbara Karst'	0.3	

Andscape Architects #3405
Lighthouse Avenue
ific Grove, Ca 93950
1) 655-3808
ail scott@halllandscape.com

Revisions

A PINE TREE REPLANTING



Larson Residence 3052 Larkin Road Pebble Beach apn 007-483-006

Water Allocation

Job # 192019

Date Printed: 11-26-2019


Revision

Drawn By MASH

Sheet

SCALE : 1/8" = 1' - 0"

of: 6 Sheets

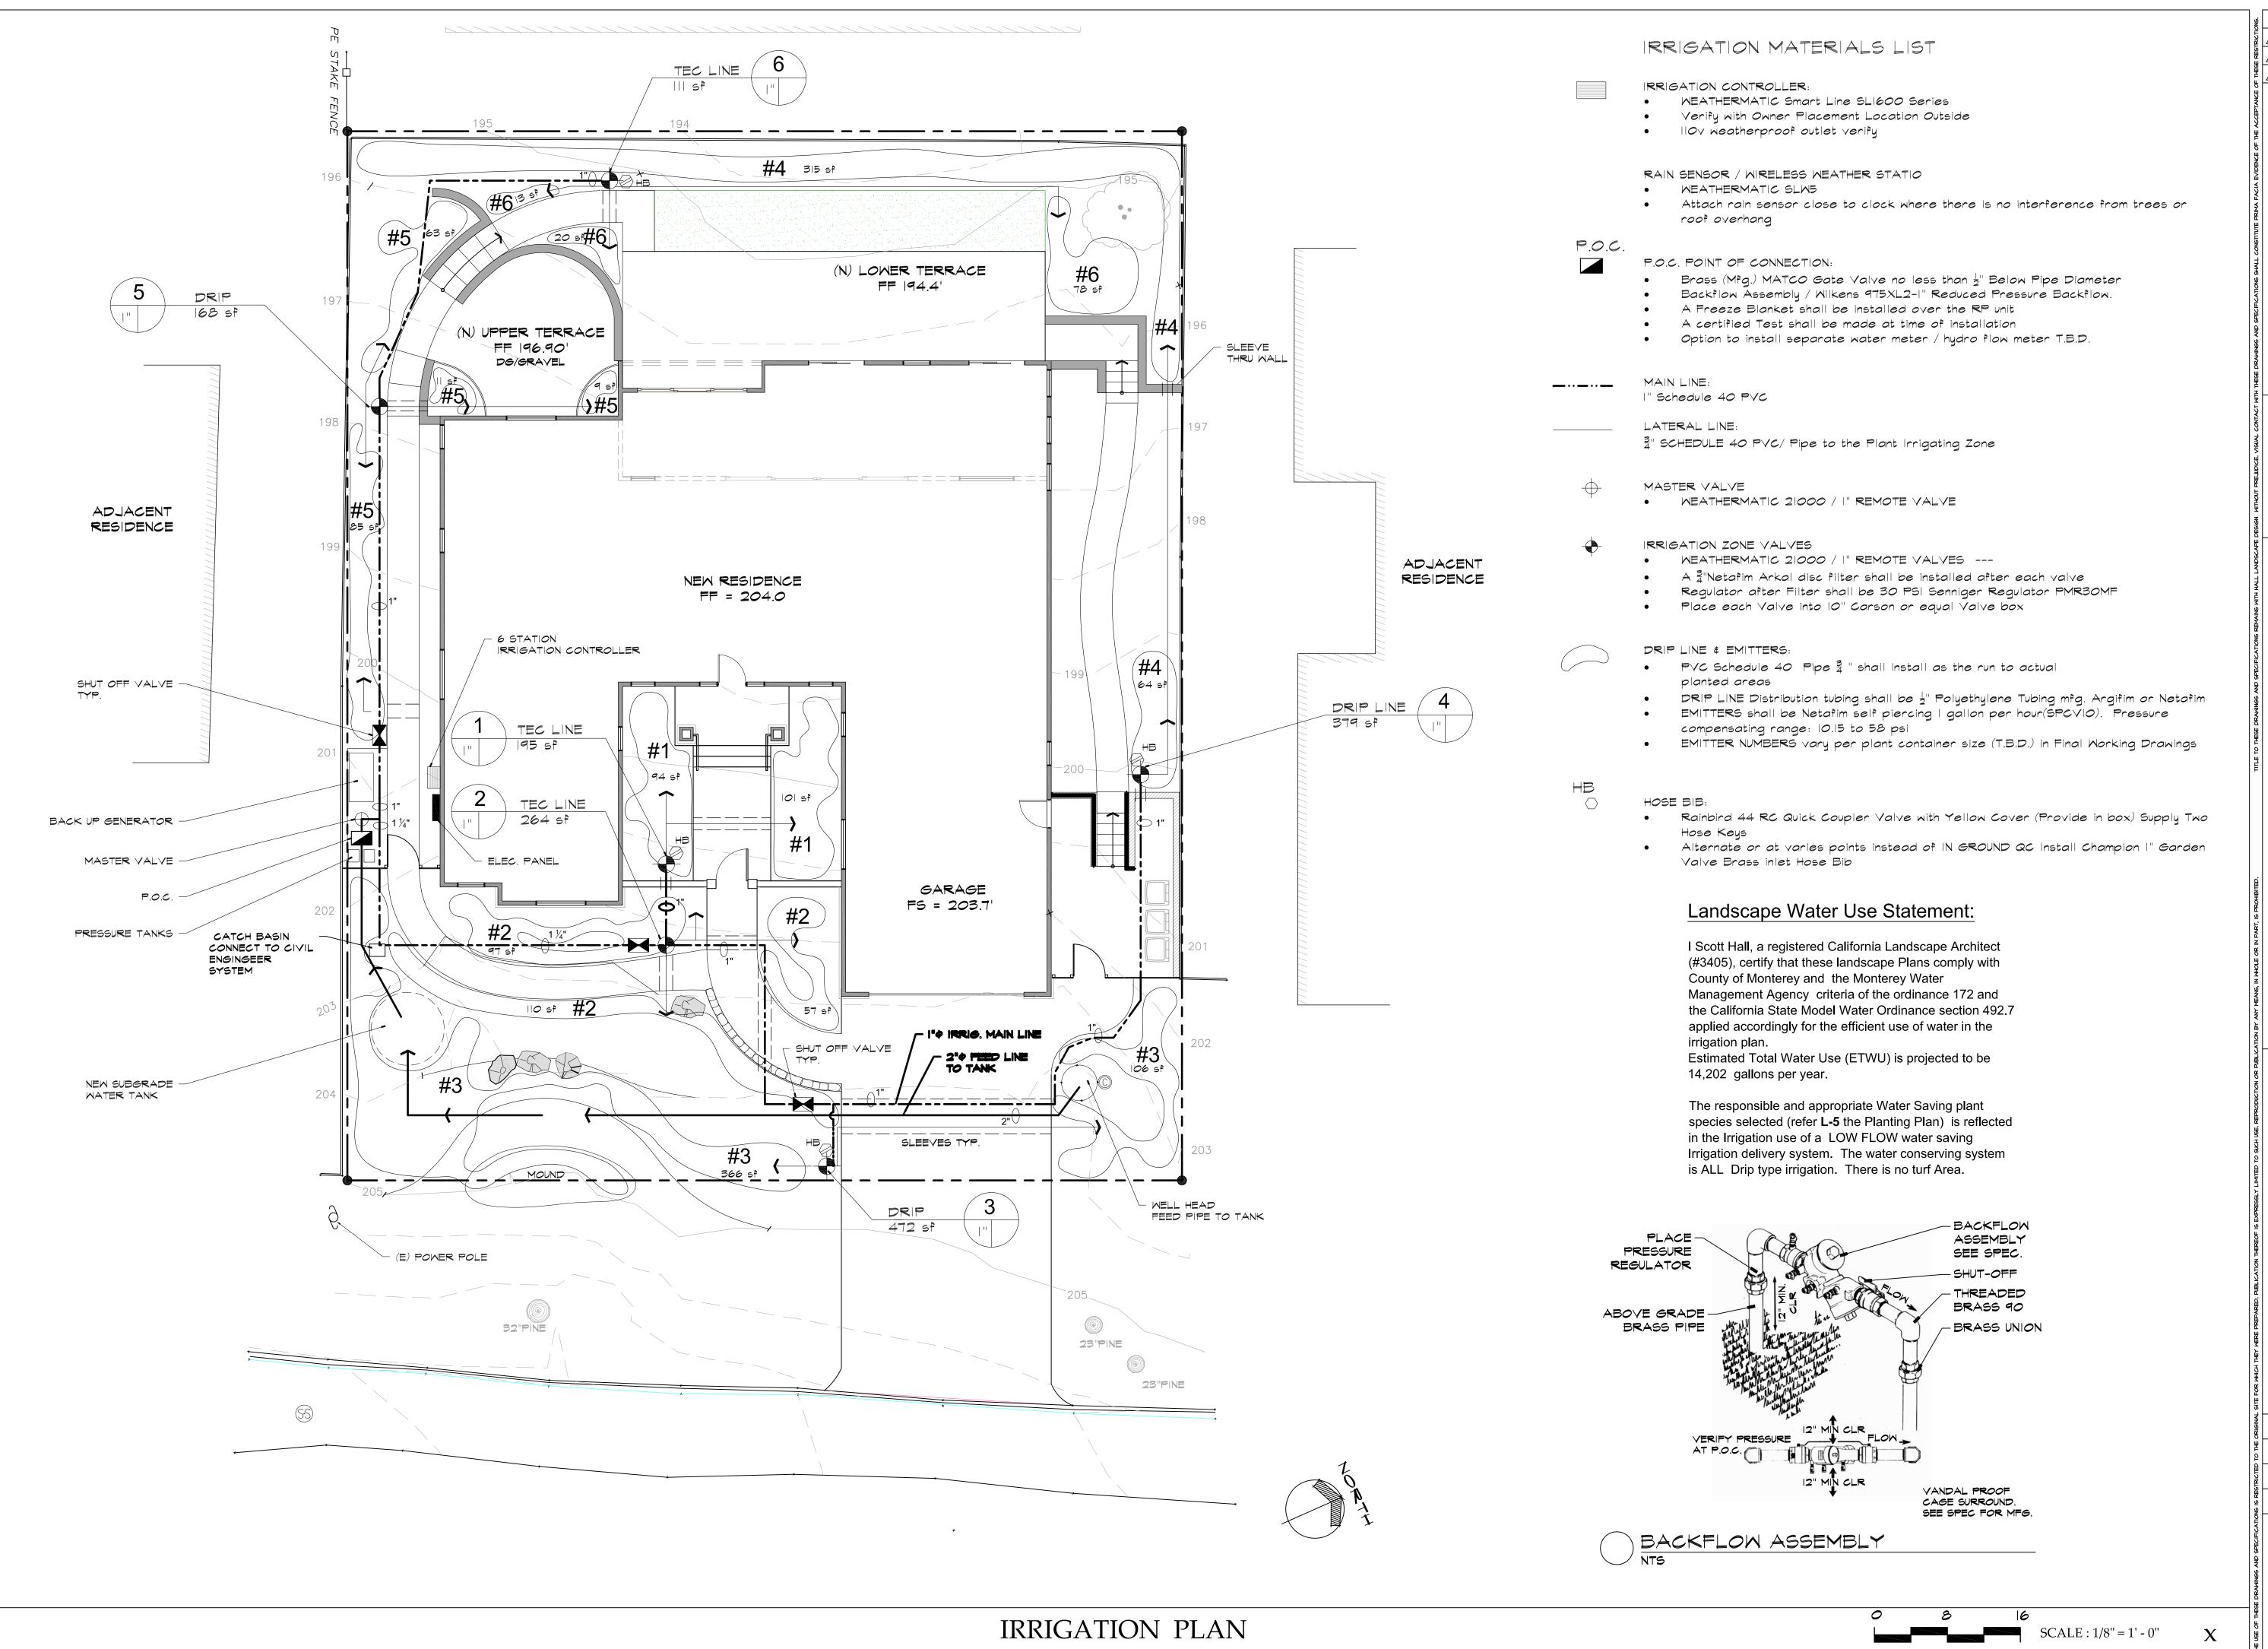

Revisions 1\(PINE TREE REPLANTING

S #3405 DATE

ence 7 Si 3052 Pebble Bea arso

Irrgation


Job# 192019

Date Printed: 11-26-2019 Revision

Drawn By Sheet

> L**-**3 of: 6 Sheets

MASH

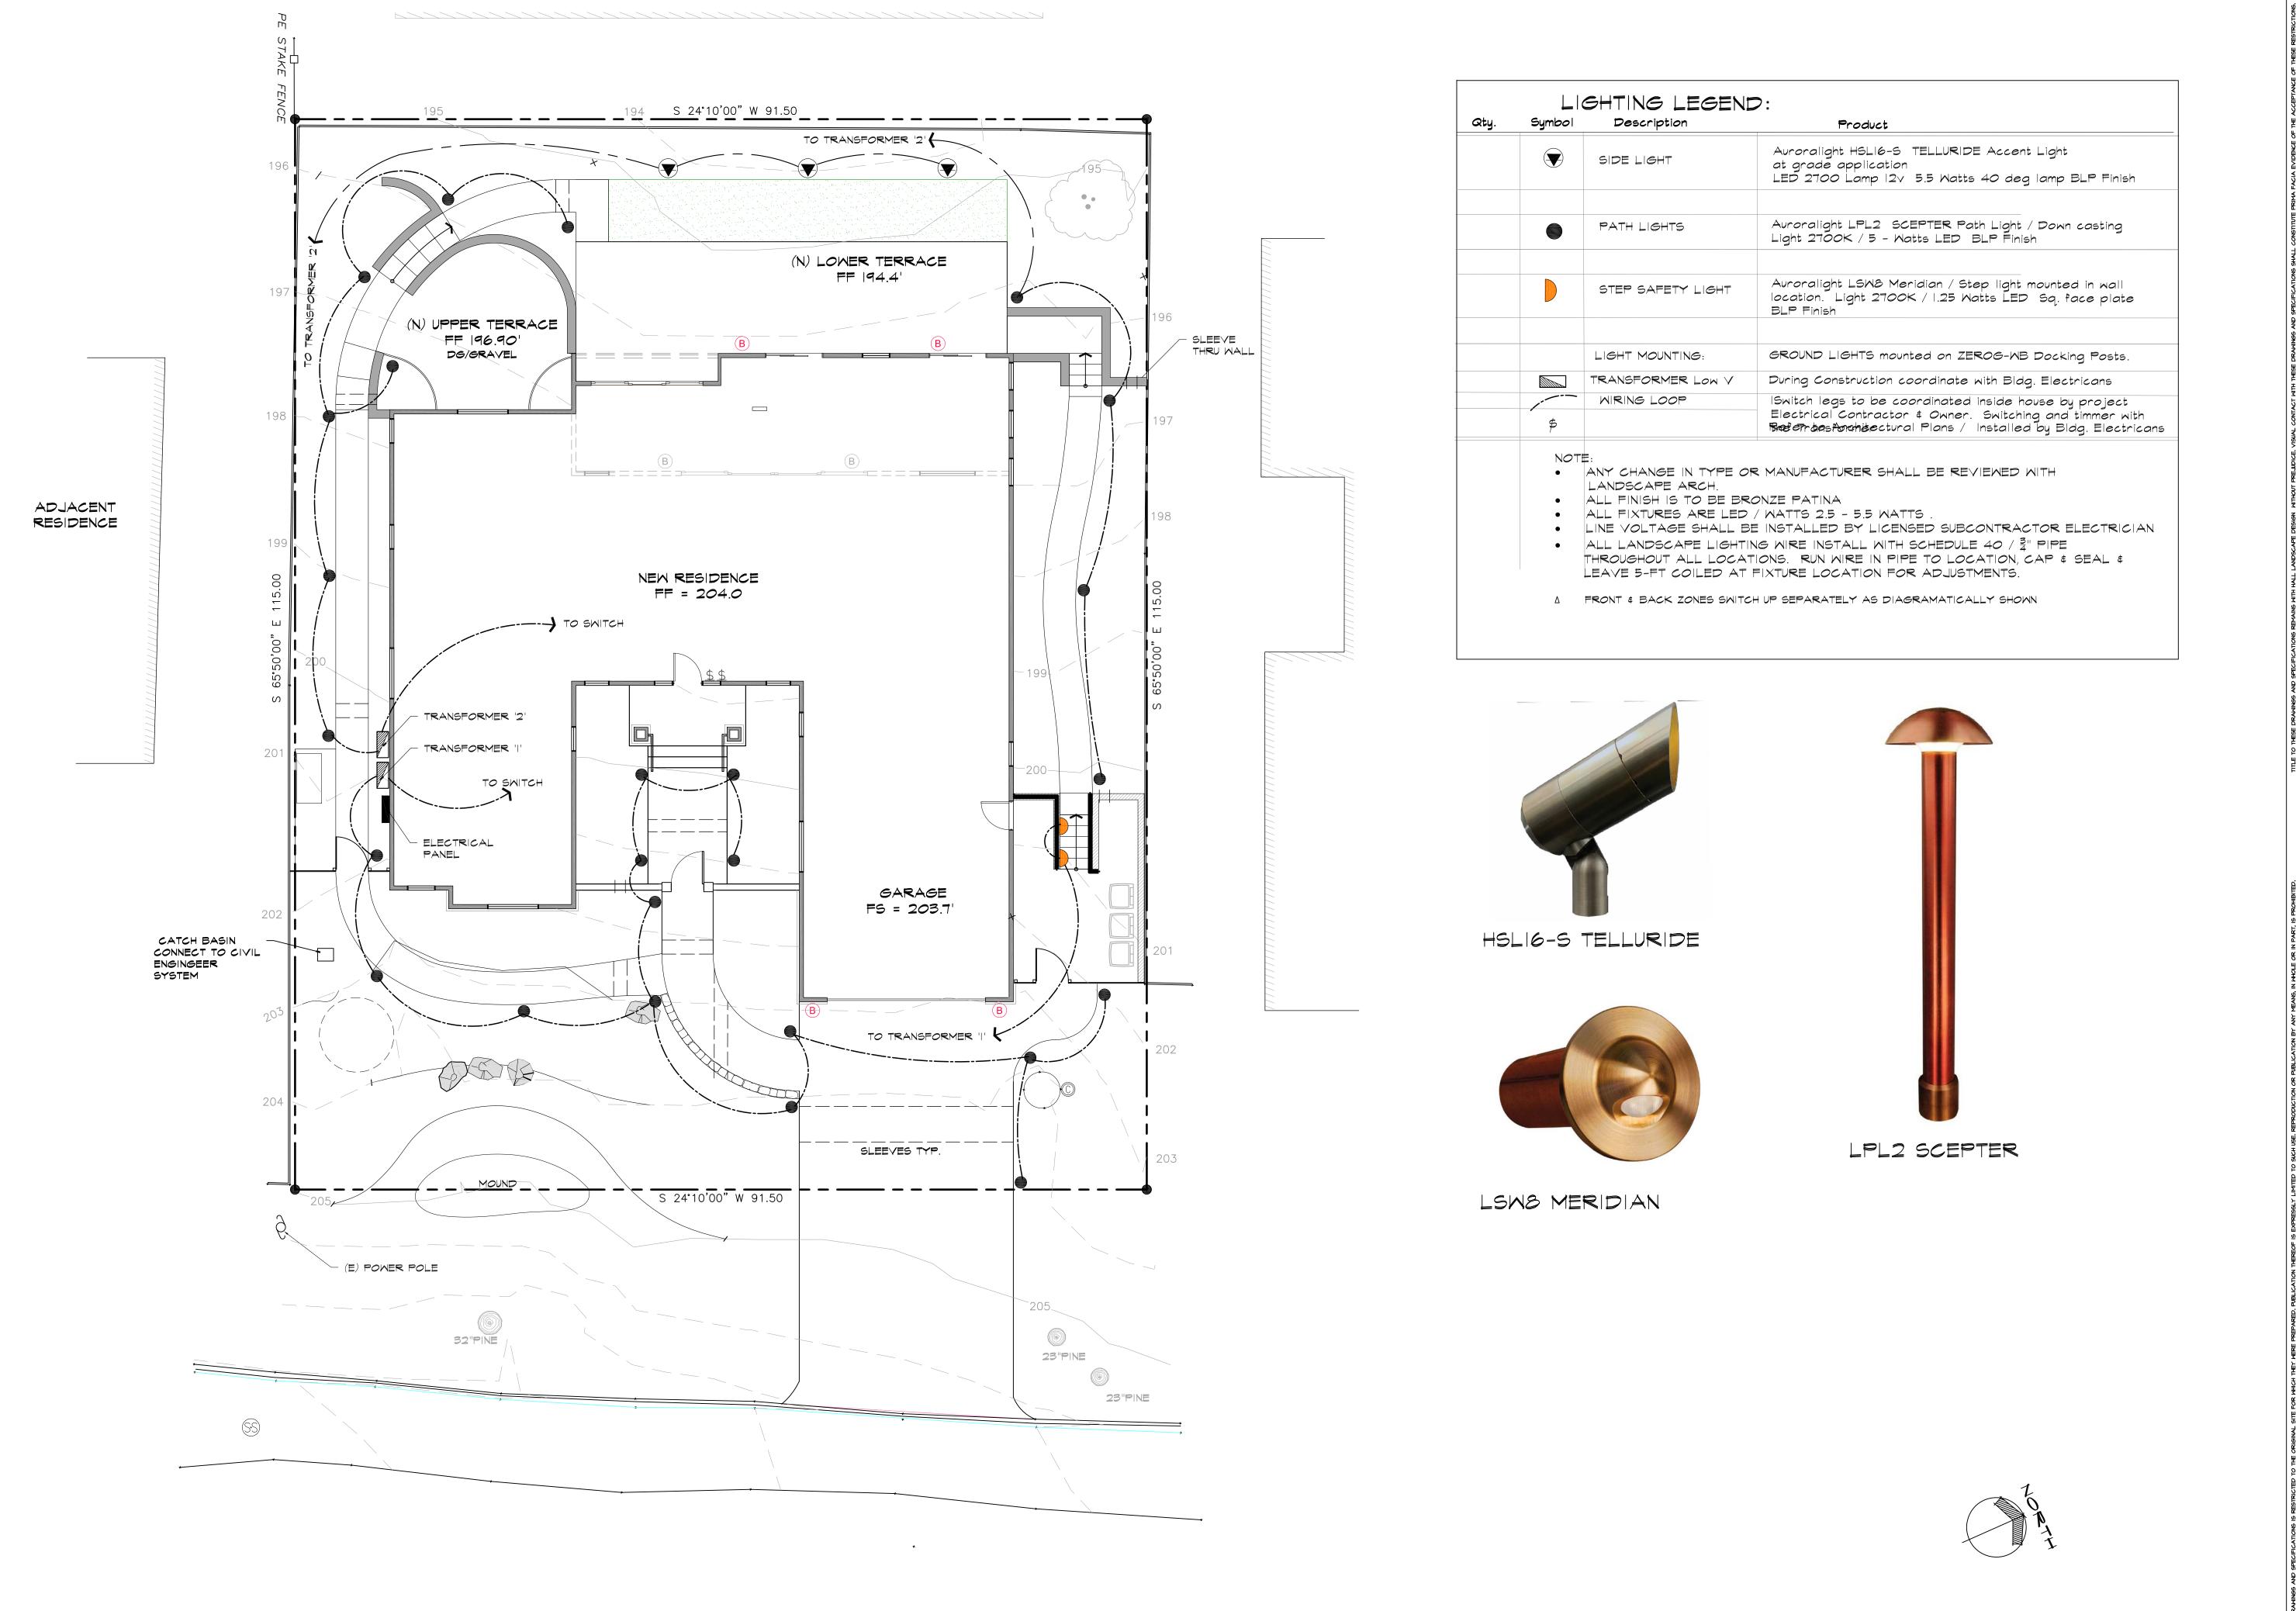

LIGHTING PLAN

Revisions

\(\triangle \)

all andscape esign

Landscape Arch 582 Lighthouse Ave Pacific Grove, Ca 93



Larson Residence 3052 Larkin Road Pebble Beach apn 007-483-006

Lighting Plan

Page litle:

Sheet

SCALE : 1/8" = 1' - 0"

Job # 192019

Date Printed: 11-26-2019

Revision

Drawn By MASH

T 1

of: 6 Sheets

PINUS RADIATA HS-I (18) 2 OF 2 (5gal) 59 5g / replacement 24" T-2 / Project Plant List: 24" PLANT SPECIES **COMMON NAME** PLANT FACTOR SIZE SYMBOL 10 HS-1 T-1 Arbutus 'Marina' 0.3 Strawberry Tree 24 Box 59 California Oak 0.1 Quercus agrifolia ART TURF Arbutus Marina Arbutus Marina 0.3 T-2 0.3 Cedrus deodara Cedar 24 Box Catalina Cherry 0.3 5 gallon HS-1 Prunus Iyonii 0.4 Pittosporum tenuiforium Pittosporum Cupressus macrocarpa Monterey Cypress 0.4 LS-1 Drymis winterii Drymis 0.4 5 gallon Victorian box 0.3 Pittosporum undulatum LS-2 0.3 Agonis flexuosa 'After Dark' stk 5 gallon Agonis FS-1 0.4 5 gallon lochroma ccyanea 'Sky King' lochroma Tibochina heteromeles 0.4 Princess flower Rhododendron 0.4 Rhododendron 'Anah Karushke' FS-2 0.3 Lecospermum cordifolia 'Don's Red' Lecospermum 5 gallon FS-3 Leucodendron red lvs. 0.3 Leucodendron 'salignum silvan Red' 5 gallon FS-4 0.3 Leucodendron 'Gold Strike' 5 gallon Leucodendron yellow lvs S-1 Mock Orange 0.4 5 gallon Choysia ternata 0.3 S-2 California Coffee Berry 5 gallon Rhamnus 'San Bruno' 0.3 Callistomen 'Johnsonii Dwarf' **Dwarf Bottle Brush** S-3 0.3 Westringia 'Mundi' Dwarf Westringia 5 gallon 0.3 S-4 5 gallon Rosmarinus 'Tuscan Blue' Rosmary 0.3 Myrtus communis 'Dwarf' S-5 Camellia 'Shi Shi Gashura' Camellia ground cover form 0.4 5 gallon Anagozanthos flavins 'Big Red' Kangaroo Paw 0.3 P -1 1 gallon Dedication 0.3 1 gallon P-2 Lavendula 'Stoches' P-3 0.3 Helleborus orientalis 'Pretty Ellen' purple Helleborus 1 gallon 0.3 G-1 Lomandra longifolia 'Breeze' Green Lomandra 1 gallon 15g Lomandra confirta 'Platnum' Varigated Lomandra GC-1 0.3 Arctostaphylos edmundsii 'Carmel Sur' Manzanita ″ 3 \ P-3 P-3 0.4 GC-2 Lithadora densiflora 'Grace Ward' Lithadora 1 gallon (lg (lg / **Dwarf Teucrium** Teucrium majorium carsonii ESP 0.5 8 \ S-2 Camellia 'Ta Ta' White single form Camellia LS-I 3 5g 59 Lavender Star Flower Grewia cafra 0.04 V-1 Tecomeria capensis Cape Honeysuckle 1 gallon 5g | Ball Form V-2 0.3 Bougainvillea 'Barbara Karst' Bougainvillea red-violet Permit TRM180114 Tree Removal Replacement 2 Trees Pinus Radiata Monterey Pine 5 gallon 13 60-2 Plant Call-Out Types Qts. T = Tree G = Grass like 59 HS = Hedge Shrub GC = Ground cover FS-3 / 3 LS = Large Shrub - above 8-F ESP = Espallier 2 \ 5-2 FS = Flowering Shrub FGC = Flw Ground Cover P = Perennial Bark Mulch Spread to 3" Depth 10 S-I 5g 1. Front Yard Use Micro Fir Bark cover minimum 2" T Quantity: 2-3 cubic yards 2. Backyard --- Double Ground clean Tree Trimmings Quantity: 5 cubic Yards 14 60-3 4 S-3 5g <u>-</u> 5g LS-2 3 S-3 FS-3 3 5g PINUS RADIATA l OF 2 (5gal) replacement GC-1 (4 (E) POWER POLE MULCH 3" THROUGHOUT ALL PLANTED AREAS AND BARE GROUND / | | 15g / 32"PINE 23"PINE

PLANTING PLAN

Revisions ⚠ PINE TREE REPLANTING

"#3405[']

Road 007-483-006 esiden rkin apn

arso

Planting Plan

3052 Pebble Bea

Sheet

SCALE: 1/8"= 1'-0"


192019 Date Printed: 11-26-2019

Revision

Drawn By MASH

L-5

of: 6 Sheets

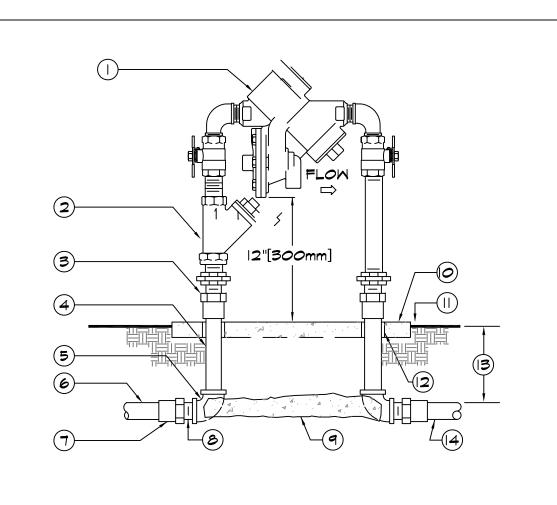


- MROUGHT COPPER MALE ADAPTER-2
- 4 COPPER TYPE "K" PIPE (LENGTH
- AS REQUIRED). (5) WROUGHT COPPER 90° ELBOW-2 TOTAL
- (SOLDER x THREAD CONNECTION). 6 PVC MAIN LINE TO POINT OF
- TOTAL (SOLDER X THREAD CONNECTION). (O) CONCRETE PAD-SEE ENCLOSURE DETAIL.
 - (II) FINISH GRADE.
 - (2) PVC SLEEVE BOTH SIDES. (13) REFER TO IRRIGATION SPECS.
 - (4) PVC MAIN LINE TO IRRIGATION SYSTEM

NOTES:


CONNECTION.

- INSTALL A FREEZE PREVENTATIVE BLANKET AROUND BACKFLOW ASSEMBLY. BLANKET
- 2. DO NOT SOLDER CONNECT FITTINGS WHILE THREADED INTO BACKFLOW ASSEMBLY. THIS MAY CAUSE DAMAGE TO DEVICE.
- 3. NIPPLES AND FITTINGS TO BE SAME IPT SIZE AS BACKFLOW ASSEMBLY.
- 4. PROVIDE A STAINLESS STEEL ENCLOSURE TO COMPLETELY ENCLOSE DEVICE. INSTALL ENCLOSURE TO CONCRETE BASE AS DIRECTED BY MANUFACTURER.



REDUCED PRESSURE BACKFLOW 3" [75mm] & SMALLER

SCALE: NONE

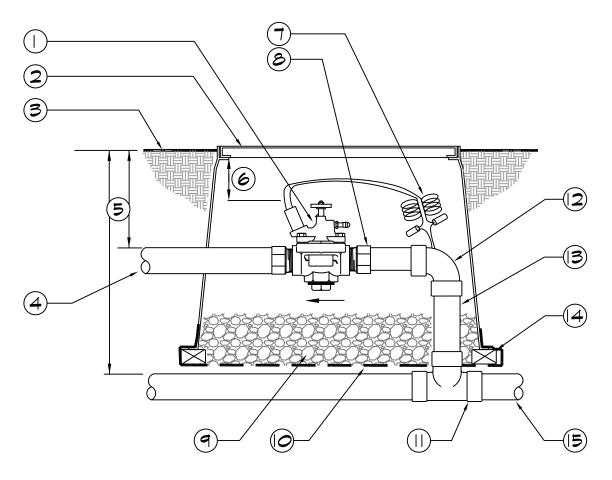

- REMOTE CONTROL VALVE WITH FLOW CONTROL AND MANUAL BLEED
- 2 10" ROUND VALVE BOX. ONE VALVE PER BOX- NO EXCEPTIONS.
- 3 FINISH GRADE
- 4) PVC LATERAL LINE
- (5) REFER TO IRRIGATION LEGEND
- (6) 3" MIN 6" MAX
- 7 VALVE CONTROL WIRE- PROVIDE 3M-DBY SEAL PACKS AT ALL SPLICES AND 24" OF EXCESS UF WIRE IN A I" DIAMETER COIL
- 8 SCHEDULE 40 MALE ADAPTER (2 TOTAL)

SCALE: NONE

- (9) PEA GRAVEL OR 3/4" DRAIN ROCK-4" [IOOmm] DEEP BELOW VALVE (NO SOIL IN VALVE BOX).
- O 19 GAUGE 1/2" [12mm] SQUARE WIRE
- (I) UPC APPROVED SCHEDULE 40 PVC
- 2 SCHEDULE 40 PVC 90° ELBOW
- (3) SCHEDULE 40 PVC
- (4) BRICK-I EACH CORNER
- (5) PVC MAIN LINE

REMOTE CONTROL VALVE ROTATORS

(I) 10" ROUND PLASTIC VALVE BOX WITH BOLT DOWN LID. 2 8" [200mm] CLASS 160 OR SCHEDULE 40 PVC PIPE (NOTCH TO FIT OVER MAIN LINE PIPE).

NOTE: MAXIMUM LINE OF SIGHT FROM SENSOR TO RECEIVER IS 1000 FT.

INSTALLED IN "CLEAR SPACE" WHERE IT IS EXPOSED TO

(WIRELESS CLIMATE SENSOR TRANSMITTER (EVE/GUTTER MOUNTED)

(2) MOUNT SENSOR ON GUTTER / EVE OR FENCLINE PROXIMATE TO OPEN SKY

MIRELESS WEATHER SENSOR

[75mm]

DISTANCE IS LESS IF OBSTRUCTIONS EXIST. SENSOR MUST BE

UNOBSTRUCTED RAINFALL AND IS CLEAR OF IRRIGATION SPRAY.

(3) PVC MAIN LINE.

(3) GUTTER/EVE

(5) CONTROLLER

(4) SENSOR RECEIVER

SCALE: NONE

(4) FINISH GRADE.

(5) PEA GRAVEL OR 3/4" [20mm] DRAIN ROCK - 4" [100mm] DEEP (NO SOIL IN VALVE

(6) BRICK-2 TOTAL.

(7) 19 GAUGE 1/2" [13mm] SQUARE WIRE MESH.

(8) GATE VALVE.

(9) SCHEDULE 40 PVC MALE ADAPTER.

GATE VALVE / BALL VALVE SCALE: NONE

- AUTOMATIC FLUSH VALVE PLUMBED TO FLUSH MANIFOLD AT LOW POINT
- (2) PVC FLUSH MANIFOLD.
- 3 MANIFOLD-TO-ELBOW

CONNECTION (TYP).

- PVC LATERAL LINE FORM DRIP ZONE KIT.
- (5) PVC SUPPLY MANIFOLD.
- 6 MANIFOLD-TO-TEE CONNECTION.

(7) DRIPLINE LATERAL

AIR/VACUUM RELIEF LATERAL NOT REQUIRED

IF CHECK VALVE USED

- (9) AIR/VACUUM RELIEF PLUMBED TO POLY TUBING IF C.Y. USED
- PERIMETER LATERALS 2" [50mm] TO 4" [100mm] FROM EDGE.
- (I) AREA PERIMETER.
- DRIPLINE OPERATION INDICATOR LOCATED AT THE ENDS OF EACH DRIPLINE ZONE.

THE TOTAL LENGTH OF A SINGLE DRIP LINE RUN SHALL NOT EXCEED 250 FT.

NETAFIM TECHLINE CY CENTER FEED

Techline HCVXR DRIPLINE

REFER TO START

REMOTE CONTROL VALVE WITH


3" MIN PYC/POLY TUBING TO

OVERALL SYSTEM DEMAND.

CONNECTION; SIZE BASED UPON

DISC FILTER AND PRV.

TECHLINE INSTALL IRRIGULAR AREA SCALE: NONE



UNITIZED SWING


JOINT ASSEMBLY

|-|/2" X |-|/4"

10" PLASTIC IRRIG. -

RND BOX

QUICK COUPLER / HOSE BIB SYSTEM SCALE: NONE

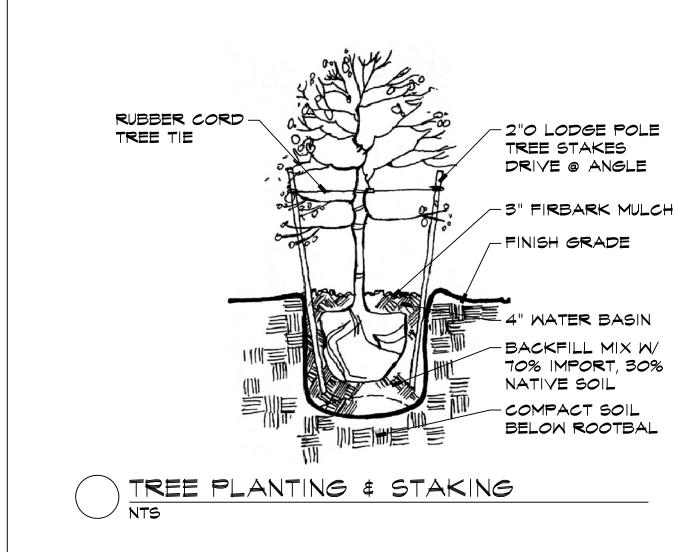

TREE PLANTING & STAKING DT SCALE: NONE

AS SHOWN

3/4" GARDEN HOSE

- |-|/2" F COUPLER

2" FIR BARK

- 3/4" CLEAN


STAKE AND

GRAVEL

MULCH

- Snap coupling hose |

ATTACHMENT



Revisions

)ad 007 Si 3052 Beacl

ebble H Planting

192019 Date Printed: 11-26-2019

Drawn By MASH

Sheet

of: 6 Sheets

PLANTING & IRRIGATION & DETAILS

REFER TO IRRIGATION

LEGEND

MANUAL FLUSH VALVE

PLUMBED TO Techline PHCYXR

- SEE SPECIFICATIONS

FOR ROW SPACING

- PERIMETER LATERALS 2" TO 4" FROM EDGE


Larson Residence

3052 Larkin Road Pebble Beach, CA. APN#: 007-483-006

Color and Material Template



Exterior wall color (Kelly Moore, km230, Graystone)




Exterior trim color (Kelly Moore, km417, Oxford Brown)



El Dorado Stone Veneer



Certainteed Presidential Shake Roof Color - Weatherwood



Windows - Milgard Tan Vinyl Without Grid

RECEIVED

SEP 2 5 2019

MONTEREY COUNTY
RESOURCE MANAGEMENT AGENCY

